

PLC-interface units, front adapters and prefabricated cables

Catalogue 2016/2017

Let's connect.

PLC-system cabling



Dear Customers,

The PDF versions of our catalogues offer practical additional functions, helping you to find your way around our product range and simplifying the ordering process.

In addition to the catalogue, the PDF also contains:

- Internal page links
- Links to the online catalogue

Try it out for yourself. Click the order number to obtain more detailed information and close-up images via your web browser. The links in the PDF file also enable you to go directly to the next desired catalogue page.

Further Weidmüller product catalogues can be accessed by clicking the following:



PLC-interface units, front adapters and prefabricated cables

Catalogue 4.5

PLC-interface units, front adapters and prefabricated cables

Universal solutions for PLC input/output cards

Dedicated solution for Honeywell C300

Interface units for Yokogawa CS3000 and ProSafe

Passive interfaces for general applications

Isolated Interfaces and solutions for general applications

Pre-assembled cables for general applications

Migration Systems

Card holders

Contents

A

B

C

D

E

F

G

H

Appendix

Index

Index Type / Index Order No.

X

PLC-interface units, front adapters and prefabricated cables

RS IO


Page A.37



- Passive interfaces for digital input/outputs for PLCs
- Ribbon cable connection 20 pole 1-2-3 wires
- With LED, fuses, disconnecter
- Screw or tension clamp connection

RS A


Page A.55



- Passive interfaces for analogue input/output for PLCs
- Connection connector SUB-D
- With disconnection by channel and test points
- Screw or tension clamp connection

RSM

Page A.61



- Passive insulated digital inputs interfaces for PLCs
- Ribbon connection cable 20 pole
- Screw or tension clamp connection

RSM

Page A.65



- Passive insulated interfaces for digital outputs for PLCs
- Ribbon connection cable 20 pole
- With narrow 6 mm relay or standard RCL
- Screw, tension clamp and PUSH IN connection

FTA-C300


Page B.5



- Passive input/output interfaces for Honeywell C300
- Screw or tension clamp connection

FTA-C300-RSLIM

Page B.12



- Passive insulated digital input/output interfaces for Honeywell C300
- Screw or tension clamp connection

C300 / PAC-C300


Page B.13



- Pre-assembled cables for Honeywell C300
- Premium range (with housing) and Basic range (without housing)

TBY-C3


Page C.6



- Passive Interfaces for CS3000 digital and analogue cards
- 2 KS (40 poles) or AKB (50 poles) connectors for redundancy
- With LED, fuses, disconnectors
- Screw and tension clamp connection

TBY-ADV


Page C.11



- Isolated Interfaces for CS3000 digital cards
- 2 AKB (50 poles) connectors for redundancy
- 6.4mm relays with fuses and disconnectors
- Screw and tension clamp connection

TBY-RS

Page C.18



- Passive Interfaces for ProSafe digital and analogue cards
- 2 KS (40 poles) or AKB (50 poles) connectors for redundancy
- With LED, fuses, disconnections
- Screw and tension clamp connection

PAC-YOK-MIL


Page C.26



- Pre-assembled cable for Yokogawa CS3000 and ProSafe
- MIL connector - MIL connector
- MIL connector - ferrules
- Colour code according DIN47100

RS F


Page D.6



- Interface for ribbon cable in accordance with IEC 60603-1/ DIN41651
- Connection 1:1
- 10 to 64 poles

RS SD

Page D.8



- Interface for connector SUB-D in accordance with IEC 60807-2/ DIN41652
- Connection 1:1
- 9 to 50 male or female poles

RS SD HD

Page D.10



- Interface for connector SUB-D high-density
- Connection 1:1
- 15, 26, 44, 62 poles
- Screw connection

RS RJ45


Page D.11



- Interfaces with RJ45 connector
- Connection 1:1

RS ELCO

Page D.12



- Interface with male ELCO plug-in connectors
- Screw or tension clamp connection

RS ELCO F


Page D.14



- Interface with female ELCO plug-in connectors
- 20 to 56 poles
- Screw connection

RS VERT

Page D.18



- Supply voltage distributor modules
- Connection 1:1
- 2 to 6 potentials

PLC-interface units, front adapters and prefabricated cables

RSD


Page D.21



- Interfaces with independent diodes or with anode or common cathode
- Screw connection

RSM 1CO/2CO


Page E.5



- Relay interface 1 or 2 changeover
- From 4 to 16 electromechanical relays
- Positive or negative switching or ac/dc
- Flat-connector available to make easy the connection to PLC'S
- Compatible with solid-state relays
- Screw, PUSH IN and tension clamp connection

RSMS 1CO

Page E.13



- Relay interface 1 changeover
- From 8 to 16 electromechanical relays
- Positive or negative switching or ac/dc
- Flat-connector available to make easy the connection to PLC'S
- Compatible with solid-state relays
- Screw and tension clamp

TIA F10

Page E.50



- TERMSERIES interface adapter for PLC wiring
- For 8-16 relays RSS
- For 8 relays RCL
- Sub-d and flat-connector connection

TRS

Page E.54



- All-purpose, pluggable relay modules
- Space-saving width
- AgNi contact with and without gold plating
- Screw and tension clamp connection

PAC-UNIV-HE

Page F.3



- Pre-assembled cables with ribbon cable connector
- Wire-end ferrules or ribbon cable connector
- Halogen free option
- Connection 1:1

PAC-UNIV-D

Page F.4



- Pre-assembled cables with SUB-D connector
- Wire-end ferrules or SUB-D connector
- Connection 1:1
- Halogen free option
- Shielded cable

PAC-HD

Page F.6



- Pre-assembled cables with High density SUB-D connector
- Wire-end ferrules or HD SUB-D connector
- Connection 1:1
- Shielded cable

PAC-ELCO


Page F.8



- Pre-assembled cables with ELCO connector
- Wire-end ferrules or ELCO connector
- Connection 1:1
- Shielded cable

PAC-UNIV

Page F.9



- Pre-assembled cables
- At one end has the PLC connector
- The other end has a wire-end ferrule

FAD S5115

Page G.16



- Front adapters for migrations from Siemens S5-115
- Clip-in foot for TS35

FAD S5135

Page G.20



- Front adapters for migrations from Siemens S5-135

FAD BLK9

Page G.23



- Front adapters for migrations from Schneider TSX
- Clip-in foot for TS35

MIGRATION RACK

Page G.28



- 19" racks
- Same dimensions as the original Siemens or Schneider racks

SKH

Page H.4



- Card holders for adapting Euro format cards (19")
- Plug-in connectors acc. to IEC 603/DIN 41612 and DIN 41617

Universal solutions for PLC input/output cards

Universal solutions for PLC input/output cards	Introduction	A.2
	ABB S800	- Selection guide A.12
	EMERSON DELTA V	- Selection guide A.13
	GEFANUC 90-30	- Selection guide A.14
	GEFANUC RX3i	- Selection guide A.15
	HONEYWELL C200	- Selection guide A.16
	MITSUBISHI MELSEC Q	- Selection guide A.17
	MOELLER XIOC	- Selection guide A.18
	OMRON - CJ1W	- Selection guide A.19
	ROCKWELL - COMPACT LOGIX	- Selection guide A.20
	ROCKWELL - CONTROL LOGIX	- Selection guide A.21
	ROCKWELL MICRO LOGIX 1400	- Selection guide A.22
	SCHNEIDER - M258	- Selection guide A.23
	SCHNEIDER - M340	- Selection guide A.24
	SCHNEIDER - MICRO	- Selection guide A.25
	SCHNEIDER - PREMIUM	- Selection guide A.26
	SCHNEIDER - QUANTUM	- Selection guide A.27
	SCHNEIDER - TWIDO	- Selection guide A.28
	SIEMENS - S7-200	- Selection guide A.29
	SIEMENS - S7-300 / ET- 200M	- Selection guide A.30
	SIEMENS - S7-400	- Selection guide A.33
	SIEMENS - S7-1200	- Selection guide A.34
	SIEMENS - S7-1500	- Selection guide A.35
	RS IO - Selection guide for passive interfaces for digital signals	A.37
	RS IO - Passive interface for digital signals	A.38
	RS A - Selection guide for passive interfaces for analogue signals	A.55
	RS A - Passive interface for analogue signals	A.56
	RSM - Selection guide for insulated interfaces for digital input signals	A.61
	RSM - Isolated interfaces for digital input signals	A.62
	RSM - Selection guide for insulated interfaces for digital output signals	A.65
	RSM - Isolated interfaces for digital output signals	A.66

Universal solutions for PLC input/output cards

Aimed at reducing costs, and to save space and time in the construction of electrical cabinets, the universal cabling system for PLCs is provided as an effective alternative to end-to-end cabling design. Weidmüller offers a wide range of pre-assembled cables and interfaces to major PLC manufacturers:

- The interfaces are used as an interconnection element between the control and the process, and are supplied with tension clamp or screw connection. Those interfaces, with a compact design, provide different functions such as LEDs, fuses, disconnectors or relays.
- The pre-assembled cables are supplied with the manufacturer's own connector at one end and are available in different lengths.

Universal system

The system is designed to be compatible with all main commercial PLCs: ABB, Emerson, Fanuc, Honeywell, Mitsubishi, Omron, Rockwell, Schneider, Siemens, ...



Guaranteed connection

The original factory connector is on one end of the PLC and standard connectors are on the other end: ribbon cable with fixing housing for digital signals and SUB-D connector for analogue signals. Available in different lengths.



Simple system configuration

Selection tables are available in this catalogue to assist you in choosing the right products for your application. In addition, there is also an automatic software selection guide on the website.



PLC SIEMENS – S7-300/ET- 200M

[illegible]

Wide range of passive interfaces

The range includes passive input/output interfaces for digital and analogue signals. The interfaces are available in screw or tension clamp connection and the sensors/actuators can be connected with 1, 2 or 3 wires, whichever is needed. You can also choose from a large variety of functions:

- LED indication
- Fuse
- Disconnect
- Test leads

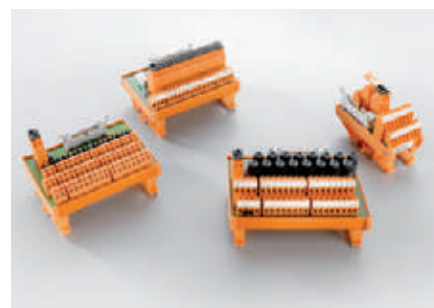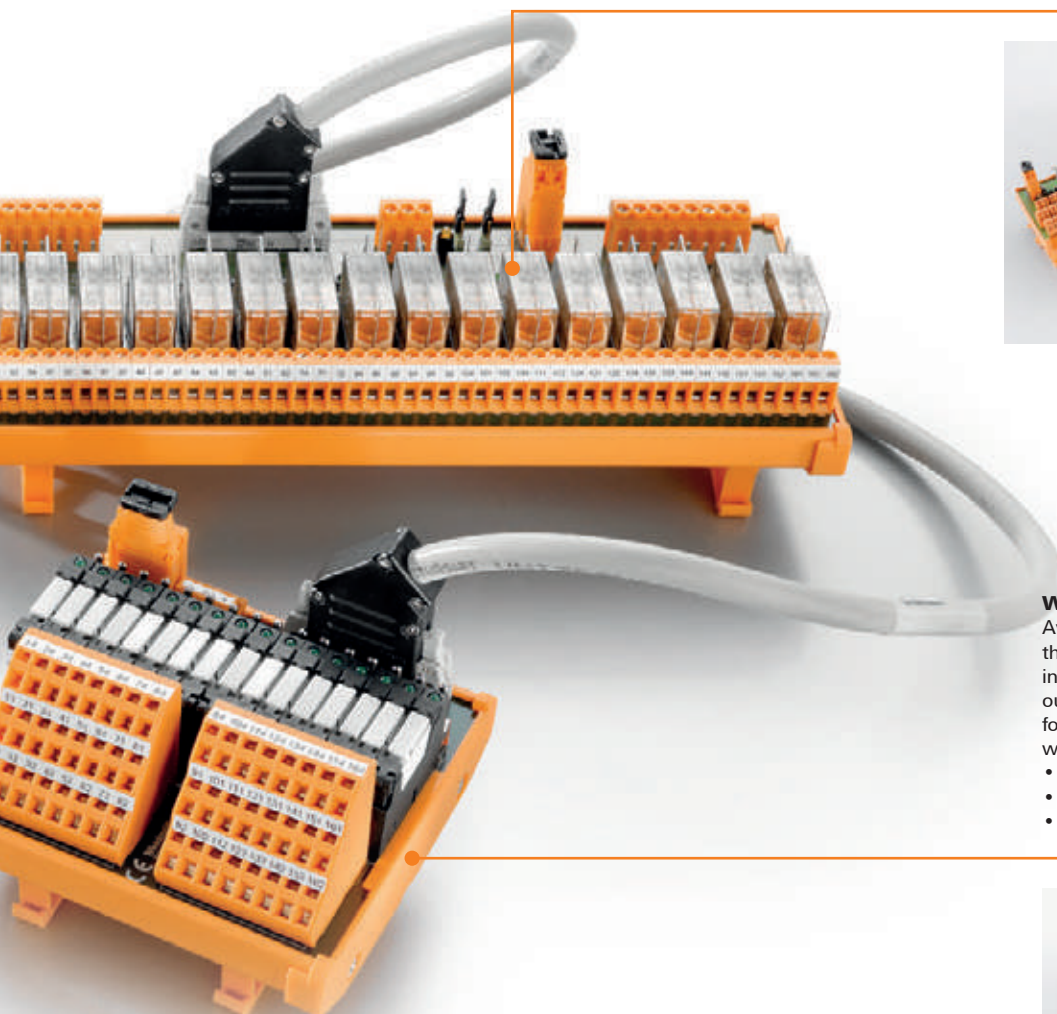

Wide range of relay insulated interfaces

Available in versions with 8-12 and 16 relays, the RSM family offers the possibility of insulating digital signals both in input and output cards. Options include our compact format (6 mm relays) or standard (RCL relay), with additional features including:

- Switch in coil and contact
- Fuse in contact
- 1 or 2 CO contacts



Universal solutions for PLC input/output cards

The increasing complexity of machinery and facilities in the industry means that attention is being drawn to the resulting rise in the costs of wiring. Traditional end-to-end cabling between the PLC and the field components has many drawbacks:

- High assembly costs: Time-consuming routing and assembly of connecting leads.
- The risk of wiring mistakes increases in proportion with the number of individual wires at one end.
- Individual wires occupy a considerable amount of space in the cabinet.
- High installation and implementation time.
- High labelling and documentation workload

Weidmüller offers a complete line of pre-assembled cables, together with a range of compact interfaces, to connect with the main commercial PLCs:

- ABB S88
- Emerson Delta V
- Ge Fanuc 90-30 and RX3i
- Honeywell C200
- Mitsubishi Melsec
- Omron CJ1W
- Rockwell Compact Logix , Control Logix and Micro Logix
- Schneider Micro, Premium, Twido, Quantum, M340 and M258
- Siemens S7-200, S7-300, S7-400, S7-1200 and S7-1500

PLC interface

The range includes passive input/output interfaces for digital and analogue signals and relay boards to insulate the input and output signals. These modules accept all common commercial connectors and are available for screw or tension clamp connection.

The Weidmüller universal interfaces for the PLC have the following individual components:

- Extruded profile for inserting the PCB
- Clip-on feet for locking on standardised mounting rails TS 32 and TS 35
- Printed circuit board where the following elements can be identified
 - Plug-in connectors to the PLC (Ribbon cable, RSV or SUB-D)
 - Weidmüller terminals for screw or tension clamp connection
 - Electronic or mechanical components offering additional functions: LED, relays, fuses...

These interfaces are universal: the same interface can be used by different PLCs from different manufacturers. Pre-assembled cables are responsible for adequately communicating the PLC with its field components.

Digital input/output interfaces (H System)

The digital input/output interfaces have been designed using a ribbon cable connector suitable for the majority of signals coming from the PLC. In addition, the pre-assembled cables are designed using a cross-section of 0.25 mm² and have a cover that guarantees complete and safe fastening with the



interface connector.


The range has been designed for 8, 12, 16 and 32 signals in tension clamp or screw connection and you can choose additional functions including:

- LED
- Fusible
- Interruptor

Additionally, sensors/actuators can be connected using 1-, 2-, or 3-wire techniques; this way, the space that is usually needed for connecting the common power supply points, which are normally connected via additional terminals, is not required.


1-wire system:

In field components, one of the wires is connected to the interface while the other is connected to a common power supply point (for example a terminal block).

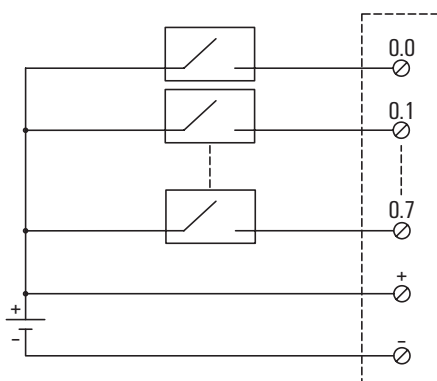

2-wire system:

The 2 wires of the field element are connected to the interface with power bus in one of them.

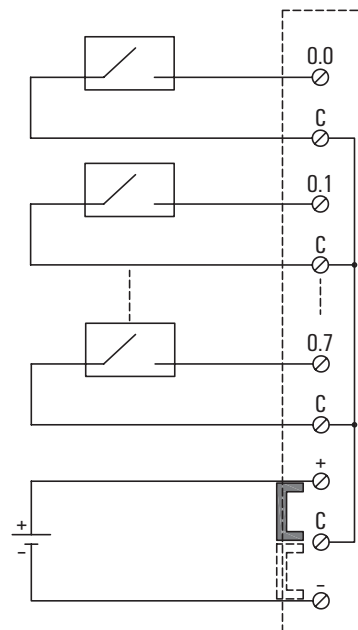

3-wire system:

The interface is designed for 3 wire field components, with one for positive, one for negative and one for the signal that is sent to the PLC.

Universal solutions for PLC input/output cards

Digital input/output interfaces for high voltage (R System)

The digital signals used by PLCs are usually 24V DC or a maximum of 48 V DC. Nevertheless, a few cards also work at higher voltages, up to 230 V AC. For these voltages, the insulation distance between channels has to be increased up to values that the ribbon cable connector is not able provide. In this case, interfaces supplied with RSV connectors have been included in the range.



Insulated digital input/output interfaces

The insulated digital input/output interfaces are used, when necessary, to isolate the PLC signal from the field signal, normally when adapting voltages between the field components and the PLC operational voltage.

The current provided by the PLC is not high enough for the different field components in the output cards. In this case, the relay acts like an amplifier and offers enough power to connect the different elements, such as, for example, electro valves.



The RSM family, available in 8, 12, and 16 relay versions connects to the PLC with a ribbon cable and is available in compact form (6 mm relays) or standard (RCL relay) and includes additional features such as:

- Switch in coil and contact
- Fuse in contact
- 1 or 2 CO contacts

In addition, the relays also can be replaced by the Weidmüller solid-state-relays.

Analogue input/output interfaces (S System)

The analogue input/output interfaces have been designed using a shielded SUB-D connector, ideal for avoid interferences in the transmission of analogue signals. The pre-assembled cables are also supplied with shielded cable.

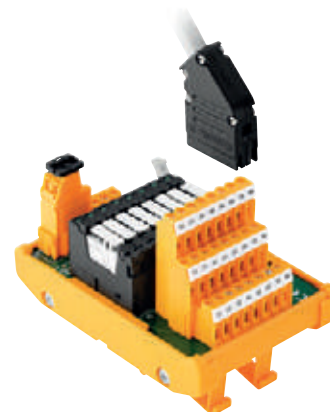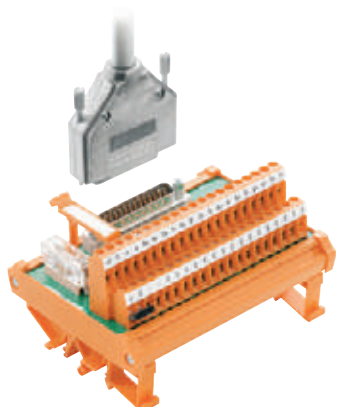

Pre-assembled cables

The connection using pre-assembled cables drastically reduces the connection work between the PLC and the field components.



Table of colour codes according to DIN 47.100

N°	Colour	N°	Colour	N°	Colour
1	White	22	Brown/Blue	43	Blue/Black
2	Brown	23	White/Red	44	Red/Black
3	Green	24	Brown/Red	45	White/Brown/Black
4	Yellow	25	White/Black	46	Yellow/Green/Black
5	Grey	26	Brown/Black	47	Grey/Pink/Black
6	Pink	27	Grey/Green	48	Blue/Red/Black
7	Blue	28	Yellow/Grey	49	White/Green/Black
8	Red	29	Pink/Green	50	Green/Brown/Black
9	Black	30	Yellow/Pink	51	White/Yellow/Black
10	Violet	31	Green/Blue	52	Yellow/Brown/Black
11	Grey/Pink	32	Yellow/Blue	53	White/Grey/Black
12	Red/Blue	33	Green/Red	54	Grey/Brown/Black
13	White/Green	34	Yellow/Red	55	White/Pink/Black
14	Brown/Green	35	Green/Black	56	Pink/Brown/Black
15	White/Yellow	36	Yellow/Black	57	White/Blue/Black
16	Yellow/Brown	37	Grey/Blue	58	Brown/Blue/Black
17	White/Grey	38	Pink/Blue	59	White/Red/Black
18	Grey/Brown	39	Grey/Red	60	Brown/Red/Black
19	White/Pink	40	Pink/Red	61	Black/White
20	Pink/Brown	41	Grey/Black		
21	White/Blue	42	Pink/Black		

Each pre-assembled cable has the following features:

- **PLC connector:** The original connector of the manufacturer is used.
- **Interface Connector:** 3 types of connectors are used according to the interface they connect to.
 - Ribbon cable connectors - which are supplied with a hood to protect them from cable extraction forces and ensure secure and reliable connection.
 - Very robust RSV connectors that allow working with high voltages of up to 230 V.
 - SUB-D connectors, where the wire screening for analogue signals is connected directly to the metallic body of the connector to minimise the effect of electromagnetic interferences.
- **Cable:** A multipole 0.25 mm² cross-section wire is used. This is also shielded for analogue signal cables. Each of the individual wires is identified by means of a colour code according to DIN 47.100.

Tables and automatic selection guides:

To help you choose the right products for your application, Weidmüller offers a catalogue with a selection of tables which can be found on the following pages.

In addition, on our website, we have an automatic selection guide, using intuitive software that can help you to choose the appropriate interface and cable for your Input/Output cards. This can be found at www.weidmueller.com

Universal solutions for PLC input/output cards

Advantages of the system:

The combination of pre-assembled cables and the interfaces allows the final connecting system to be:

- **Safe**
 - It excludes the risk of errors in cabling
- **Fast**

The use of pre-assembled cables means there are real savings in time:

 - during design, thanks to the selection guides.
 - during assembly.
 - during startup.
 - in the detection/resolution of problems.
- **Reliable**
 - no cabling errors,
 - clean cabling in cabinet
(multi-pole cables instead of single cables)
- **Flexible**
 - a multitude of input/output interfaces
 - variable cable lengths,
 - expansions can be made without any problem.
 - flexibility thanks to the simplicity of interchanging and diverse input/output interfaces.
 - easy migration to another system, simply by changing the pre-assembled cable.
- **Small-space reduction**
 - more space in the cable ducts,
 - narrow modules,
 - no terminal block

Universal solutions for PLC input/output cards

A

2

7 Universal solutions for PLC input/output cards

5

A

2021E20000

3 Locate the exact family of modules and the quantity you require

Example:

- H2016 System Quantity: 1 unit (by card)

or

- I2016 System Quantity: 1 unit (by card)

Take the notes into account (if there are any)

The portfolio includes:

Passive digital input/output interfaces (H System)

H20: Universal interface for pin to pin 20 pole ribbon cable (see chapter D)

H2008: Passive input/output 8-channel digital interface

H2012: Passive input/output 12-channel digital interface

H2016: Passive input/output 16-channel digital interface

H40: Universal interface for pin to pin 40 pole ribbon cable (see chapter D)

Passive digital input/output interfaces for high voltage (R System)

R1208: Passive input/output 8-channel digital interface (for high voltage)

R2416: Passive input/output 16-channel digital interface (for high voltage)

R3632: Passive input/output 32-channel digital interface (for high voltage)

Passive analogue output/input interfaces (S System)

A15: Universal interface for pin to pin SUB-D 15 male poles (see catalogue D)

A25: Universal interface for pin to pin SUB-D 25 male poles (see catalogue D)

A37: Universal interface for pin to pin SUB-D 37 male poles (see catalogue D)

A1504: Passive input/output 4-channel analogue interface

A2508: Passive input/output 8-channel analogue interface

A3716: Passive input/output 16-channel analogue interface

A1504M: Passive input/output 4-channel analogue interface (specific)

A2508P: Passive input/output 8-channel analogue interface (specific)

A2509M: Passive input/output 8+1-channel analogue interface (specific)

Relay insulated digital output/input interfaces

O2008: 8-channel insulated digital output interface positive switching

O2008N: 8-channel insulated digital output interface negative switching

O2012: 12-channel insulated digital output interface positive switching

O2016: 16-channel insulated digital output interface positive switching

O2016N: 16-channel insulated digital output interface negative switching

I2016: 16-channel insulated digital input interface

4 Note the page number that is shown in the top part of the column

Example:

- H2016 System -> See page A.37

or

- I2016 System -> See page A.61

5 Once the module family is chosen (step 3 - eg H2016), go to the page identified in step 4 and locate that family in the new table on that page.

6 Choose the interface according to your application needs ie. 1, 2 or 3 wires, screw or tension clamp connection, with fuse, LED, switch, etc.

7 Go to the specifications page where you can check all the details of the interface.

Note: The interfaces are intended to be used inside an IP20 enclosure at least.

PLC ABB S800



	PLC		Cables		Interfaces					
	Input/Output cards		Standard		Direct inputs/outputs		Insulated inputs		Insulated outputs	
					- see page A.37 (H,R) or A.55 (A) -		- see page A.61 -		- see page A.65 -	
	Manufacturer code	Number/Type of channels	Order No.	Quantity	Type	Quantity	Type	Quantity	Type	Quantity
DI	DI810	16 DI	7789641xxx	1	H2016	1	I2016	1		
	DI811 ^{A)}	16 DI	7789641xxx	1	H2016	1				
	DI814 ^{A)}	16 DI	7789641xxx	1	H0216	1				
	DI830	16 DI	7789641xxx	1	H2016	1	I2016	1		
	DI831 ^{A)}	16 DI	7789641xxx	1	H2016	1				
	DI840	16 DI	7789641xxx	1	H2016	1	I2016	1		
	DI880	16 DI	7789641xxx	1	H2016	1	I2016	1		
DO	DO810	16 DO	7789641xxx	1	H2016	1			O2016	1
	DO814 ^{B)}	16 DO	7789641xxx	1	H2016	1			O2016N	1
	DO815	8 DO	7789643xxx	1	H2016	1			O2016	1
	DO840	16 DO	7789641xxx	1	H2016	1			O2016	1
	DO880	16 DO	7789641xxx	1	H2016	1			O2016	1
AI	AI810	8 AI	7789657xxx	1	A25	1				
	AI820	4 AI	7789657xxx	1	A25	1				
	AI830	8 AI	7789657xxx	1	A25	1				
	AI830A	8 AI	7789657xxx	1	A25	1				
	AI845	8 AI	7789657xxx	1	A25	1				
AO	AO810	8 AO	7789657xxx	1	A25	1				
	AO810V2	8 AO	7789657xxx	1	A25	1				
	AO820	4 AO	7789657xxx	1	A25	1				
	AO845	8 AO	7789657xxx	1	A25	1				
Note A) Attention! Only use interfaces without LEDs B) Attention! Use only interfaces without LEDs for the direct option.										

- Please, always take into account the characteristics of the PLC card (voltage, current...) when selecting interfaces. In some cases, the card can work at higher voltages than those indicated in the interface.
 - Use with 812TU MTU
 - The interfaces are intended to be used inside an IP20 enclosure at least.
 - The last 3 digits of the cable code indicate its length in decimetres. For example, if the code ends in 100, the cable would be 10 m long.
- * In the case that an input/output card does not appear in this table, you can check our on-line PLC selection guide at www.weidmueller.com where you will always find the most up-to-date information.

PLC EMERSON DELTA V

	PLC		Cables		Interfaces					
	Input/Output cards		Standard		Direct inputs/outputs		Insulated inputs		Insulated outputs	
					- see page A.37 (H,R) or A.55 (A) -		- see page A.61 -		- see page A.65 -	
	Manufacturer code	Number/Type of channels	Order No.	Quantity	Type	Quantity	Type	Quantity	Type	Quantity
DI	VE4001S2T1B1 ^{A)}	8 DI	7789100xxx	1	H2016	1				
	VE4001S2T1B2 ^{A)}	8 DI	7789100xxx	1	H2016	1				
	VE4001S2T1B3 ^{A)}	8 DI	7789701xxx	1	H2016	1				
	VE4001S2T2B1 ^{A)}	8 DI	7789100xxx	1	H2016	1				
	VE4001S2T2B2 ^{A)}	8 DI	7789100xxx	1	H2016	1				
	VE4001S2T2B3 ^{A)}	8 DI	7789701xxx	1	H2016	1				
	VE4001S2T2B4 ^{A)}	32 DI	7789100xxx	2	H2016	2				
	VE4001S2T2B5 ^{A)}	32 DI	7789702xxx	2	H2016	2				
	VE4001S3T1B1	8 DI	7789104xxx	1	R2416	1				
	VE4001S3T1B2	8 DI	7789104xxx	1	R2416	1				
DO	VE4001S3T2B1	8 DI	7789104xxx	1	R2416	1				
	VE4001S3T2B2	8 DI	7789104xxx	1	R2416	1				
	VE4002S1T1B1 ^{A)}	8 DO	7789100xxx	1	H2008	1				
	VE4002S1T1B2 ^{A)}	8 DO	7789100xxx	1	H2008	1				
	VE4002S1T1B3 ^{A)}	8 DO	7789701xxx	1	H2016	1				
	VE4002S1T2B1 ^{A)}	8 DO	7789100xxx	1	H2008	1				
	VE4002S1T2B2 ^{A)}	8 DO	7789100xxx	1	H2008	1				
	VE4002S1T2B3 ^{A)}	8 DO	7789700xxx	1	H2008	1				
	VE4002S1T2B4 ^{A)}	8 DO	7789703xxx	1	H2008	1				
	VE4002S1T2B5 ^{A)}	32 DO	7789100xxx	2	H2016	2				
AI	VE4002S1T2B6 ^{A)}	32 DO	7789702xxx	2	H2016	2				
	VE4002S2T1B2	8 DO	7789108xxx	1	R1208	1				
	VE4002S2T2B1	8 DO	7789104xxx	1	R2416	1				
	VE4002S2T2B2	8 DO	7789104xxx	1	R2416	1				
	VE4003S2B1	8 AI	1350490xxx	1	A2508	1				
	VE4003S2B2	8 AI	1350490xxx	1	A2508	1				
	VE4003S2B3	8 AI	1350490xxx	1	A2508	1				
	VE4003S2B4	8 AI	7789704xxx	1	A2508	1				
	VE4003S2B6	16 AI	1350500xxx	1	A3716	1				
	VE4003S3B3	8 AI	1350490xxx	1	A2508	1				
AO	VE4003S3B4	8 AI	7789704xxx	1	A2508	1				
	VE4003S6B1	8 AI	1350500xxx	1	A3716	1				
	VE4005S2B1	8 AO	1350490xxx	1	A2508	1				
AO	VE4005S2B2	8 AO	1350490xxx	1	A2508	1				
	VE4005S2B3	8 AO	7789704xxx	1	A2508	1				
Note A) Attention! Only use interfaces without LEDs										

- Please, always take into account the characteristics of the PLC card (voltage, current...) when selecting interfaces. In some cases, the card can work at higher voltages than those indicated in the interface.
 - Cables 7789100xxx, 7789104xxx, 7789106xxx, 7789108xxx, 1350480xxx, 1350490xxx and 1350500xxx have wire-end ferrules at one end. These cables do not have a PLC connector. Colour code according to DIN 47100.
 - The interfaces are intended to be used inside an IP20 enclosure at least.
 - The last 3 digits of the cable code indicate its length in decimetres. For example, if the code ends in 100, the cable would be 10 m long.
- * In the case that an input/output card does not appear in this table, you can check our on-line PLC selection guide at www.weidmueller.com where you will always find the most up-to-date information.

PLC GEFANUC 90-30



A

	PLC		Cables		Interfaces					
	Input/Output cards		Standard		Direct inputs/outputs		Insulated inputs		Insulated outputs	
					- see page A.37 (H,R) or A.55 (A) -		- see page A.61 -		- see page A.65 -	
	Manufacturer code	Numero/Type canales	Order No.	Quantity	Type	Quantity	Type	Quantity	Type	Quantity
DI	IC693MDL230	8 DI	7789064xxx	1	R2416	1				
	IC693MDL231	8 DI	7789064xxx	1	R2416	1				
	IC693MDL240	16 DI	7789061xxx	1	R2416	1				
	IC693MDL241	16 DI, positive logic	7789067xxx	1	H2016	1	I2016	1		
	IC693MDL630	8 DI	7789067xxx	1	H2008	1				
	IC693MDL632	8 DI, positive logic	7789634xxx	1	R1208	1				
	IC693MDL634	8 DI, positive logic	7789067xxx	1	H2008	1				
	IC693MDL640	16 DI	7789067xxx	1	H2016	1				
	IC693MDL643	16 DI	7789067xxx	1	H2016	1				
	IC693MDL645	16 DI, positive logic	7789067xxx	1	H2016	1	I2016	1		
	IC693MDL646	16 DI, positive logic	7789067xxx	1	H2016	1	I2016	1		
	IC693MDL654	32 DI, positive logic	7789066xxx	2	H2016	2	I2016	2		
IC693MDL655	32 DI, positive logic	7789066xxx	2	H2016	2	I2016	2			
DO	IC693MDL310	12 DO	7789063xxx	1	R2416	1				
	IC693MDL340	16 DO	7789063xxx	1	R2416	1				
	IC693MDL730	8 DO	7789069xxx	1	H2008	1			O2008	1
	IC693MDL731 A)	8 DO	7789069xxx	1	H2016	1			O2016N	1
	IC693MDL732	8 DO	7789068xxx	1	H2008	1			O2008	1
	IC693MDL733 A)	8 DO	7789068xxx	1	H2016	1			O2016N	1
	IC693MDL740	16 DO	7789068xxx	1	H2016	1			O2016	1
	IC693MDL741 A)	16 DO	7789068xxx	1	H2016	1			O2016N	1
	IC693MDL742	16 DO	7789068xxx	1	H2016	1			O2016	1
	IC693MDL752 A)	32 DO	7789066xxx	2	H2016	2			O2016N	2
	IC693MDL753	32 DO	7789066xxx	2	H2016	2			O2016	2
	IC693MDL930	8 DO	7789064xxx	1	R2416	1				
AI	IC693ALG220	4 AI, voltage differential applications	7789076xxx	1	A1504	1				
	IC693ALG221	4 AI, current applications	7789075xxx	1	A1504	1				
	IC693ALG222	16 AI or 8 AI	7789072xxx	1	A2508	1				
	IC693ALG223	16 AI	7789072xxx	1	A2508	1				
AO	IC693ALG390	4 AO	7789073xxx		A2508	1				
	IC693ALG391	4 AO	7789073xxx	1	A2508	1				
	IC693ALG392	8 AO, current applications	7789620xxx	1	A1504	1				
	IC693ALG392	8 AO, voltage applications	7789624xxx	1	A1504	1				
AI/AO	IC693ALG442	4 AI 2 AO	7789074xxx	1	A3716	1				
Note	A) Attention! Use only interfaces without LEDs for the direct option.									

- Please, always take into account the characteristics of the PLC card (voltage, current...) when selecting interfaces. In some cases, the card can work at higher voltages than those indicated in the interface.
- The interfaces are intended to be used inside an IP20 enclosure at least.
- The last 3 digits of the cable code indicate its length in decimetres. For example, if the code ends in 100, the cable would be 10 m long.

* In the case that an input/output card does not appear in this table, you can check our on-line PLC selection guide at www.weidmueller.com where you will always find the most up-to-date information.

PLC GEFANUC RX3i



	PLC		Cables		Interfaces					
	Input/Output cards		Standard		Direct inputs/outputs		Insulated inputs		Insulated outputs	
					- see page A.37 (H,R) or A.55 (A) -		- see page A.61 -		- see page A.65 -	
	Manufacturer code	Number/Type of channels	Order No.	Quantity	Type	Quantity	Type	Quantity	Type	Quantity
DI	IC694MDL230	8 DI	7789064xxx	1	R2416	1				
	IC694MDL231	8 DI	7789064xxx	1	R2416	1				
	IC694MDL240	16 DI	7789061xxx	1	R2416	1				
	IC694MDL241	16 DI, positive logic	7789067xxx	1	H2016	1	I2016	1		
	IC694MDL250	16 DI	7789631xxx	1	R3632	1				
	IC694MDL260	32 DI	7789632xxx	1	R3632	1				
	IC694MDL632	8 DI, positive logic	7789634xxx	1	R1208	1				
	IC694MDL634	8 DI, positive logic	7789067xxx	1	H2008	1				
	IC694MDL645	16 DI, positive logic	7789067xxx	1	H2008	1	I2016	1		
	IC694MDL646	16 DI, positive logic	7789067xxx	1	H2008	1	I2016	1		
	IC694MDL654	32 DI, positive logic	7789066xxx	2	H2016	2	I2016	2		
	IC694MDL655	32 DI, positive logic	7789066xxx	2	H2016	2	I2016	2		
	IC694MDL660	32 DI	7789619xxx	1	H2016	2	I2016	2		
DO	IC694MDL310	12 DO	7789063xxx	1	R2416	1				
	IC694MDL330	8 DO	7789634xxx	1	R1208	1				
	IC694MDL340	16 DO	7789063xxx	1	R2416	1				
	IC694MDL350	16 DO	7789631xxx	1	R3632	1				
	IC694MDL390	5 DO	7789636xxx	1	R2416	1				
	IC694MDL732	8 DO	7789068xxx	1	H2008	1			02008	1
	IC694MDL734	6 DO	7789669xxx	1	R2416	1				
	IC694MDL740	16 DO	7789068xxx	1	H2016	1			02016	1
	IC694MDL741 A)	16 DO	7789068xxx	1	H2016	1			02016N	1
	IC694MDL742 B)	16 DO	7789068xxx	1	H2016	1			02016	1
	IC694MDL752 A)	32 DO	7789066xxx	2	H2016	2			02016N	2
	IC694MDL753	32 DO	7789066xxx	2	H2016	2			02016	2
	IC694MDL754	32 DO	7789618xxx	1	H2016	2			02016	2
	IC694MDL916	16 DO	7789696xxx	1	R3632	1				
	IC694MDL930	8 DO	7789064xxx	1	R2416	1				
	IC694MDL931	8 DO	7789665xxx	1	R3632	1				
	IC694MDL940	16 DO	7789666xxx	1	R2416	1				
AI	IC694ALG220	4 AI, voltage differential applications	7789076xxx	1	A1504	1				
	IC694ALG221	4 AI, voltage differential applications	7789075xxx	1	A1504	1				
	IC694ALG222	16 AI	7789072xxx	1	A2508	1				
	IC694ALG223	16 AI	7789072xxx	1	A2508	1				
	IC695ALG106	6 AI, current applications	1373690xxx	1	A2508	1				
	IC695ALG106	6 AI, voltage applications	1373700xxx	1	A2508	1				
	IC695ALG508	8 AI	1338580xxx	1	A3716	1				
	IC695ALG600	8 AI, resistance applications	7789622xxx	1	A3716	1				
	IC695ALG600	8 AI, voltage or current applications	7789623xxx	1	A3716	1				
	IC695ALG608	8 AI, common applications	7789667xxx	1	A2508	1				
		4 AI, differential applications								
	IC695ALG616	8 AI, differential applications	7789626xxx	1	A3716	1				
	IC695ALG616	4 AI, common mode applications	7789798xxx	1	A3716	1				
IC695ALG626 C)	8 AI, differential applications	7789626xxx	1	A3716	1					
IC695ALG626 C)	16 AI, common mode applications	7789798xxx	1	A3716	1					
AO	IC694ALG390	2 AO	7789073xxx	1	A2508	1				
	IC694ALG391	2 AO	7789073xxx	1	A2508	1				
	IC694ALG392	8 AO, current applications	7789620xxx	1	A1504	1				
	IC694ALG392	8 AO, voltage applications	7789624xxx	1	A1504	1				
	IC695ALG704	4 AO	7789668xxx	1	A1504	1				
	IC695ALG708	8 AO	7789625xxx	1	A2508	1				
	IC695ALG728 B) C)	8 AO	7789625xxx	1	A2508	1				
	IC695ALG808	8 AO	7789621xxx	1	A2508	1				
AI/AO	IC694ALG442	4 AI	7789074xxx	1	A3716	1				
		2 AO								
DI/DO	IC695HCS308	8 DI	1419430xxx	1	H20	1				
		7 DO								
Note	A) Attention! Use only interfaces without LEDs for the direct option. C) Attention! Only use Interfaces without disconnectors and test points		B) LEDs interfaces only possible if configured at 24 V DC							

- Please, always take into account the characteristics of the PLC card (voltage, current...) when selecting interfaces. In some cases, the card can work at higher voltages than those indicated in the interface.
- The interfaces are intended to be used inside an IP20 enclosure at least.
- The last 3 digits of the cable code indicate its length in decimetres. For example, if the code ends in 100, the cable would be 10 m long.

* In the case that an input/output card does not appear in this table, you can check our on-line PLC selection guide at www.weidmueller.com where you will always find the most up-to-date information.

PLC HONEYWELL C200



	PLC		Cables		Interfaces					
	Input/Output cards		Standard		Direct inputs/outputs		Insulated inputs		Insulated outputs	
					- see page A.37 (H,R) or A.55 (A) -		- see page A.61 -		- see page A.65 -	
	Manufacturer code	Number/Type of channels	Order No.	Quantity	Type	Quantity	Type	Quantity	Type	Quantity
DI	TC-IDA161 / TK-IDA161	16 DI	7789031xxx	1	R2416	1				
	TC-IDD321 / TK-IDD321	32 DI	7789041xxx	1	H2016	2	I2016	2		
	TC-IDJ161 / TK-IDJ161	16 DI	7789049xxx	1	H2016	1	I2016	1		
	TC-IDK161 / TK-IDK161	16 DI	7789030xxx	1	R3632	1				
	TC-IDW161 / TK-IDW161	16 DI	7789030xxx	1	R3632	1				
	TC-IDX081 / TK-IDX081	8 DI	7789048xxx	1	R1208	1				
	TC-IDX161 / TK-IDX161	16 DI	7789049xxx	1	H2016	1	I2016	1		
DO	TC-ODA161 TK-ODA161	16 DO	7789056xxx	1	R2416	1				
	TC-ODD321 / TK-ODD321	32 DO	7789042xxx	1	H2016	1			O2016	1
	TC-ODJ161 / TK-ODJ161	16 DO	7789059xxx	1	H2016	1			O2016	1
	TC-ODK161 / TK-ODK161	16 DO	7789030xxx	1	R3632	1				
	TC-ODX081 / TK-ODX081	8 DO	7789057xxx	1	R1208	1				
	TC-ODX161 / TK-ODX161	16 DO	7789040xxx	1	H2016	1			O2016	1
	TC-ORC081 / TK-ORC081	8 DO	7789155xxx	1	R2416	1				
	TC-ORC161 / TK-ORC161	16 DO	7789030xxx	1	R3632	1				
AI	TC-IAH061 / TK-IAH061	6 AI, current applications	7789156xxx	1	A2508	1				
	TC-IAH061 / TK-IAH061	6 AI, voltage applications	7789157xxx	1	A2508	1				
	TC-IAH161 / TK-IAH161	16 AI	7789032xxx	1	A3716	1				
	TC-IXR061 / TK-IXR061 ^A	6 AI, resistances 0 to 550 Ω	7789158xxx	1	A2508	1				
AO	TC-OAH061 / TK-OAH061	6 AO	7789159xxx	1	A2508	1				
	TC-OAV061 / TK-OAV161	6 AO	7789157xxx	1	A2508	1				
	TC-OAV081 / TK-OAV081	8 AO, current applications	7789037xxx	1	A2508	1				
	TC-OAV081 / TK-OAV081	8 AO, voltage applications	7789038xxx	1	A2508	1				
Note		A) Only for 2-wires applications								

- Please, always take into account the characteristics of the PLC card (voltage, current...) when selecting interfaces. In some cases, the card can work at higher voltages than those indicated in the interface.
 - The interfaces are intended to be used inside an IP20 enclosure at least.
 - The last 3 digits of the cable code indicate its length in decimetres. For example, if the code ends in 100, the cable would be 10 m long.
- * In the case that an input/output card does not appear in this table, you can check our on-line PLC selection guide at www.weidmuller.com where you will always find the most up-to-date information.

PLC MITSUBISHI MELSEC Q



	PLC		Cables		Interfaces					
	Input/Output cards		Standard		Direct inputs/outputs		Insulated inputs		Insulated outputs	
					- see page A.37 (H,R) or A.55 (A) -		- see page A.61 -		- see page A.65 -	
	Manufacturer code	Number/Type of channels	Order No.	Quantity	Type	Quantity	Type	Quantity	Type	Quantity
DI	QX10	16 DI	7789104xxx	1	R2416	1				
	QX28	8 DI	7789108xxx	1	R1208	1				
	QX40 ^{A)}	16 DI	7789100xxx	1	H2016	1				
	QX40-S1 ^{A)}	16 DI	7789100xxx	1	H2016	1				
	QX41 ^{A)}	32 DI	7789681xxx	1	H2016	2				
	QX41-S1 ^{A)}	32 DI	7789681xxx	1	H2016	2				
	QX42 ^{A)}	64 DI	7789681xxx	2	H2016	4				
	QX42-S1 ^{A)}	64 DI	7789681xxx	2	H2016	4				
	QX50	16 DI	7789104xxx	1	R2416	1				
	QX70 ^{A)}	16 DI	7789100xxx	1	H2016	1				
	QX71 ^{A)}	32 DI	7789681xxx	1	H2016	2				
	QX72 ^{A)}	64 DI	7789681xxx	2	H2016	4				
	QX80	16 DI	7789100xxx	1	H2016	1	I2016	1		
	QX81	32DI	7789682xxx	1	H2016	2	I2016	2		
DO	QX82	64 DI	7789683xxx	2	H2016	4	I2016	4		
	QX82-S1	64 DI	7789683xxx	2	H2016	4	I2016	4		
	QY10	16 DO	7789104xxx	1	R2416	1				
	QY18A	8 DO	7789104xxx	1	R2416	1				
	QY22	16 DO	7789104xxx	1	R2416	1				
	QY40P ^{B)}	16 DO	7789100xxx	1	H2016	1			02016N	1
	QY41P ^{B)}	32 DO	7789708xxx	1	H2016	2			02016N	2
	QY42P ^{B)}	64 DO	7789708xxx	2	H2016	4			02016N	4
	QY50 ^{B)}	16 DO	7789100xxx	1	H2016	1			02016N	1
	QY68A	8 DO	7789100xxx	1	H2016	1			02016	1
	QY70 ^{B)}	16 DO	7789100xxx	1	H2016	1			02016N	1
	QY71 ^{B)}	32 DO	7789708xxx	1	H2016	2			02016N	2
	QY80	16 DO	7789100xxx	1	H2016	1			02016	1
	QY81	32DO	7789709xxx	1	H2016	2			02016	2
DI/DO	QY81P	32DO	7789709xxx	1	H2016	2				
	QH42P ^{B)}	32 DI	7789681xxx	1	H2016	2				
		32 DO	7789708xxx	1	H2016	2			02016N	2
	QX41Y41P ^{B)}	32 DI	7789681xxx	1	H2016	2				
		32 DO	7789708xxx	1	H2016	2			02016N	2
	QX48Y57 ^{B)}	8 DI	7789100xxx	2	H2016	1				
AI		7 DO			H2016	1			02016N	1
	Q62AD-DGH	2 AI	1350480xxx	1	A1504	1				
	Q64AD	4 AI	1350480xxx	1	A1504	1				
	Q64AD-GH	4 AI	1350480xxx	1	A1504	1				
	Q68AD-G	8 AI, current applications	7789684xxx	1	A2508	1				
	Q68AD-G	8 AI, voltage applications	7789685xxx	1	A2508	1				
	Q68ADI	8 AI	1350490xxx	1	A2508	1				
	Q68ADV	8 AI	1350490xxx	1	A2508	1				
AO	Q62DA	2 AO	1350480xxx	1	A1504	1				
	Q62DA-FG	2AO	1350480xxx	1	A1504	1				
	Q62DAN	2 AO	1350480xxx	1	A1504	1				
	Q64DA	4 AO	1350480xxx	1	A1504	1				
	Q64DAN	4 AO	1350480xxx	1	A1504	1				
	Q66DA-G	6 AO, current applications	7789710xxx	1	A2508	1				
	Q66DA-G	6 AO, voltage applications	7789711xxx	1	A2508	1				
	Q68DAI	8 AO	1350490xxx	1	A2508	1				
	Q68DAIN	8 AO	1350490xxx	1	A2508	1				
	Q68DAV	8 AO	1350490xxx	1	A2508	1				
	Q68DAVN	8 AO	1350490xxx	1	A2508	1				
Note A) Attention! Only use interfaces without LEDs B) Attention! Use only interfaces without LEDs for the direct option.										

- Please, always take into account the characteristics of the PLC card (voltage, current...) when selecting interfaces. In some cases, the card can work at higher voltages than those indicated in the interface.
- Cables 7789100xxx, 7789104xxx, 7789106xxx, 7789108xxx, 1350480xxx, 1350490xxx and 1350500xxx have wire-end ferrules at one end. These cables do not have a PLC connector. Colour code according to DIN 47100.
- The interfaces are intended to be used inside an IP20 enclosure at least.
- The last 3 digits of the cable code indicate its length in decimetres. For example, if the code ends in 100, the cable would be 10 m long.

* In the case that an input/output card does not appear in this table, you can check our on-line PLC selection guide at www.weidmueller.com where you will always find the most up-to-date information.


PLC MOELLER XIOC

	PLC		Cables		Interfaces					
	Input/Output cards		Standard		Direct inputs/outputs		Insulated inputs		Insulated outputs	
					- see page A.37 (H,R) or A.55 (A) -		- see page A.61 -		- see page A.65 -	
	Manufacturer code	Number/Type of channels	Order No.	Quantity	Type	Quantity	Type	Quantity	Type	Quantity
DI	XIOC-16DI	16 DI, positive logic	7789862xxx	1	H2016	1	I2016	1		
		16 DI, negative logic ^{A)}	7789863xxx	1	H2016	1				
	XIOC-16DI-AC	16 DI	7789864xxx	1	R2416	1				
	XIOC-16DI-AC110	16 DI	7789864xxx	1	R2416	1				
	XIOC-32DI	32 DI, positive logic	7789771xxx	1	H2016	2	I2016	2		
		32 DI, negative logic ^{A)}	7789768xxx	1	H2016	2				
DO	XIOC-8DI	8 DI, positive logic	7789862xxx	1	H2008	1				
		8 DI, negative logic ^{A)}	7789863xxx	1	H2016	1				
	XIOC-12DO-R ^{B)}	12 DO	7789871xxx	1	R2416	1				
	XIOC-16DO	16 DO	7789865xxx	1	H2016	1			O2016	1
	XIOC-16DO-S	16 DO	7789865xxx	1	H2016	1			O2016	1
	XIOC-32DO	32 DO	7789866xxx	1	H2016	2			O2016	2
DI/DO	XIOC-8DO	8 DO	7789865xxx	1	H2008	1			O2008	1
		8 DO	7789872xxx	1	H2016	1				
AI	XIOC-8AI-U1	8 AI	7789867xxx	1	A2508	1				
		8 AI	7789867xxx	1	A2508	1				
		8 AI	7789867xxx	1	A2508	1				
AO	XIOC-2AO-U1-2AO-U2	4 AO	7789868xxx	1	A1504	1				
		2 AO	7789868xxx	1	A1504	1				
		4 AO	7789868xxx	1	A1504	1				
		2 AO	7789868xxx	1	A1504	1				
AI/AO	XIOC-2AI-1AO-U1	2 AI	7789870xxx	1	A1504	1				
		2 AO								
	XIOC-2AI-1AO-U1-I1	2 AI	7789870xxx	1	A1504	1				
		2 AO								
	XIOC-4AI-2AO-U1	4 AI	7789869xxx	1	A2508	1				
		2 AO								
Note		4 AI	7789869xxx	1	A2508	1				
		2 AO								

A) Attention! Only use interfaces without LEDs
B) The 24 V DC power supply should be provided externally

- Please, always take into account the characteristics of the PLC card (voltage, current...) when selecting interfaces. In some cases, the card can work at higher voltages than those indicated in the interface.
 - The interfaces are intended to be used inside an IP20 enclosure at least.
 - The last 3 digits of the cable code indicate its length in decimetres. For example, if the code ends in 100, the cable would be 10 m long.
- * In the case that an input/output card does not appear in this table, you can check our on-line PLC selection guide at www.weidmueller.com where you will always find the most up-to-date information.

PLC OMRON – CJ1W

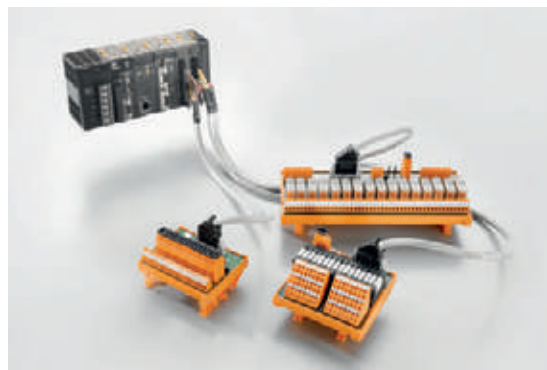

	PLC		Cables		Interfaces					
	Input/Output cards		Standard		Direct inputs/outputs		Insulated inputs		Insulated outputs	
					- see page A.37 (H,R) or A.55 (A) -		- see page A.61 -		- see page A.65 -	
	Manufacturer code	Number/Type of channels	Order No.	Quantity	Type	Quantity	Type	Quantity	Type	Quantity
DI	IA111	16 DI	7789664xxx	1	R2416	1				
	IA201	8 DI	7789648xxx	1	R1208	1				
	ID211	16 DI, positive logic	7789645xxx	1	H2016	1	I2016	1		
	ID231	16 DI, negative logic ^{A)}	7789833xxx	1	H2016	1				
	ID231	32 DI, positive logic	7789771xxx	1	H2016	2	I2016	2		
	ID232	32 DI, negative logic ^{A)}	7789768xxx	1	H2016	2				
	ID232	32 DI, positive logic	7789772xxx	1	H2016	2	I2016	2		
	ID232	32 DI, negative logic ^{A)}	7789767xxx	1	H2016	2				
	ID261	64 DI, positive logic	7789771xxx	2	H2016	4	I2016	4		
	ID261	64 DI, negative logic ^{A)}	7789768xxx	2	H2016	4				
DO	OA201	8 DO	7789648xxx	1	R1208	1				
	OC201	8 DO	7789649xxx	1	R2416	1				
	OC211	16 DO	7789664xxx	1	R2416	1				
	OD201 ^{B)}	8 DO	7789650xxx	1	H2016	1			O2016N	1
	OD202	8 DO	7789650xxx	1	H2008	1			O2008	1
	OD211 ^{B)}	16 DO	7789794xxx	1	H2016	1			O2016N	2
	OD212	16 DO	7789794xxx	1	H2016	1			O2016	2
	OD231 ^{B)}	32 DO	7789793xxx	1	H2016	2			O2016N	2
	OD232	32 DO	7789373xxx	1	H2016	2			O2016	2
	OD233 ^{B)}	32 DO	7789373xxx	1	H2016	2			O2016N	2
	OD261 ^{B)}	64 DO	7789793xxx	2	H2016	4			O2016N	4
	OD262	64 DO	7789373xxx	2	H2016	4			O2016	4
	OD263 ^{B)}	64 DO	7789373xxx	2	H2016	4			O2016N	4
DI/DO	MD232	16 DI, positive logic	7789328xxx	1	H2016	1				
	MD232	16 DO	7789329xxx	1	H2016	1			O2016	1
	MD232 ^{C)}	16 DI, negative logic	7789329xxx	1	H2016	1				
		16 DO	7789329xxx	1	H2016	1			O2016	1

Note

- A) Attention! Only use interfaces without LEDs
 B) Attention! Use only interfaces without LEDs for the direct option.
 C) Attention! Use only interfaces without LEDs for the direct input option

- Please, always take into account the characteristics of the PLC card (voltage, current...) when selecting interfaces. In some cases, the card can work at higher voltages than those indicated in the interface.
- The interfaces are intended to be used inside an IP20 enclosure at least.
- The last 3 digits of the cable code indicate its length in decimetres. For example, if the code ends in 100, the cable would be 10 m long.

* In the case that an input/output card does not appear in this table, you can check our on-line PLC selection guide at www.weidmueller.com where you will always find the most up-to-date information.

PLC ROCKWELL – COMPACT LOGIX



	PLC		Cables		Interfaces					
	Input/Output cards		Standard		Direct inputs/outputs		Insulated inputs		Insulated outputs	
					- see page A.37 (H,R) or A.55 (A) -		- see page A.61 -		- see page A.65 -	
	Manufacturer code	Number/Type of channels	Order No.	Quantity	Type	Quantity	Type	Quantity	Type	Quantity
DI	1769-IA16	16 DI	7789025xxx	1	R2416	1				
	1769-IA8I	8 DI	7789016xxx	1	R2416	1				
	1769-IM12	12 DI	7789025xxx	1	R2416	1				
	1769-IQ16	16 DI, positive logic	7789770xxx	1	H2016	1	I2016	1		
		16 DI, negative logic ^{A)}	7789831xxx	1	H2016	1				
	1769-IQ16F	16 DI, positive logic	7789770xxx	1	H2016	1	I2016	1		
		16 DI, negative logic ^{A)}	7789831xxx	1	H2016	1				
	1769-IQ32	32 DI, positive logic	7789770xxx	1	H2016	2	I2016	2		
			7789695xxx	1						
	1769-IQ32 ^{A)}	32 DI, negative logic	7789831xxx	1	H2016	2				
			7789832xxx	1						
DO	1769-0A16	16 DO	7789024xxx	1	R2416	1				
	1769-0A8	8 DO	7789017xxx	1	R1208	1				
	1769-0B16	16 DO	7789769xxx	1	H2016	1			02016	1
	1769-0B16P	16 DO	7789769xxx	1	H2016	1			02016	1
	1769-0B32	32 DO	7789769xxx	1	H2016	2			02016	2
			7789697xxx	1						
	1769-0B32T	32 DO	1489170xxx	1	H2016	2			02016	2
	1769-0B8	8 DO	7789015xxx	1	H2008	1			02008	1
	1769-0V16 ^{A)}	16 DO	7789769xxx	1	H2016	1				
	1769-0W16	16 DO	7789024xxx	1	R2416	1				
	1769-0W8	8 DO	7789017xxx	1	R1208	1				
	1769-0W8I	8 DO	7789016xxx	1	R2416	1				
AI	1769-IF4	4 AI, current applications	7789026xxx	1	A1504	1				
	1769-IF4	4 AI, voltage applications	7789046xxx	1	A1504	1				
	1769-IF4I	4 AI, current applications	7789027xxx	1	A1504	1				
	1769-IF4I	4 AI, voltage applications	7789047xxx	1	A1504	1				
	1769-IF8	8 AI, current applications	7789028xxx	1	A2508	1				
	1769-IF8	8 AI, voltage applications	7789045xxx	1	A2508	1				
AO	1769-OF2	2 AO	7789029xxx	1	A1504	1				
	1769-OF4CI	4 AO	7789043xxx	1	A1504	1				
	1769-OF8C	8 AO	7789044xxx	1	A2508	1				
	1769-OF8V	8 AO	7789044xxx	1	A2508	1				
Note A) Attention! Only use interfaces without LEDs										

- Please, always take into account the characteristics of the PLC card (voltage, current...) when selecting interfaces. In some cases, the card can work at higher voltages than those indicated in the interface.
- The interfaces are intended to be used inside an IP20 enclosure at least.
- The last 3 digits of the cable code indicate its length in decimetres. For example, if the code ends in 100, the cable would be 10 m long.

* In the case that an input/output card does not appear in this table, you can check our on-line PLC selection guide at www.weidmueller.com where you will always find the most up-to-date information.

PLC ROCKWELL – CONTROL LOGIX



	PLC		Cables		Interfaces					
	Input/Output cards		Standard		Direct inputs/outputs		Insulated inputs		Insulated outputs	
					- see page A.37 (H,R) or A.55 (A) -		- see page A.61 -		- see page A.65 -	
	Manufacturer code	Number/Type of channels	Order No.	Quantity	Type	Quantity	Type	Quantity	Type	Quantity
DI	1756-IA16	16 DI	7789031xxx	1	R2416	1				
	1756-IA16I	16 DI	7789030xxx	1	R3632	1				
	1756-IA8D	8 DI	7789048xxx	1	R1208	1				
	1756-IB16	16 DI	7789039xxx	1	H2016	1	I2016	1		
	1756-IB16D	16 DI	7789049xxx	1	H2016	1	I2016	1		
	1756-IB16I	16 DI	7789049xxx	1	H2016	1	I2016	1		
	1756-IB32	32 DI	7789041xxx	1	H2016	2	I2016	2		
	1756-IC16	16 DI	7789031xxx	1	R2416	1				
	1756-IH16I	16 DI	7789030xxx	1	R3632	1				
	1756-IM16I	16 DI	7789030xxx	1	R3632	1				
	1756-IN16	16 DI	7789031xxx	1	R3632	1				
DO	1756-0A16	16 DO	7789056xxx	1	R3632	1				
	1756-0A16I	16 DO	7789030xxx	1	R3632	1				
	1756-0A8	8 DO	7789057xxx	1	R1208	1				
	1756-0A8D	8 DO	7789048xxx	1	R1208	1				
	1756-0A8E	8 DO	7789048xxx	1	R1208	1				
	1756-0B16D	16 DO	7789040xxx	1	H2016	1			02016	1
	1756-0B16E	16 DO	7789058xxx	1	H2016	1			02016	1
	1756-0B16I	16 DO	7789059xxx	1	H2016	1			02016	1
	1756-0B32	32 DO	7789042xxx	1	H2016	2			02016	2
	1756-0B8	8 DO	7789151xxx	1	H2008	1			02008	1
	1756-0B8EI	8 DO	7789152xxx	1	H2008	1			02008	1
	1756-0C8	8 DO	7789153xxx	1	R2416	1				
	1756-0H8I	8 DO	7789154xxx	1	R2416	1				
	1756-0N8	8 DO	7789057xxx	1	R1208	1				
	1756-0V16E	16 DO	7789058xxx	1	H2016	1			02016	1
	1756-0W16I	16 DO	7789030xxx	1	R3632	1				
	1756-0X8I	8 DO	7789155xxx	1	R2416	1				
	1756-IF16	16 AI	7789032xxx	1	A3716	1				
AI	1756-IF6I	6 AI, current applications	7789156xxx	1	A2508	1				
	1756-IF6I	6 AI, voltage applications	7789157xxx	1	A2508	1				
	1756-IF8	8 AI, current applications	7789035xxx	1	A2508	1				
	1756-IF8	8 AI, voltage applications	7789036xxx	1	A2508	1				
	1756-IR6I	6 AI	7789158xxx	1	A2508	1				
AO	1756-OF4	4 AO, current applications	7789033xxx	1	A1504	1				
	1756-OF4	4 AO, voltage applications	7789034xxx	1	A1504	1				
	1756-OF6CI	6 AO, resistances 0 to 550 Ω	7789159xxx	1	A2508	1				
	1756-OF6VI	6 AO	7789157xxx	1	A2508	1				
	1756-OF8	8 AO, current applications	7789037xxx	1	A2508	1				
	1756-OF8	8 AO, voltage applications	7789038xxx	1	A2508	1				
Note										

- Please, always take into account the characteristics of the PLC card (voltage, current...) when selecting interfaces. In some cases, the card can work at higher voltages than those indicated in the interface.
- The interfaces are intended to be used inside an IP20 enclosure at least.
- The last 3 digits of the cable code indicate its length in decimetres. For example, if the code ends in 100, the cable would be 10 m long.

* In the case that an input/output card does not appear in this table, you can check our on-line PLC selection guide at www.weidmueller.com where you will always find the most up-to-date information.

PLC ROCKWELL MICRO LOGIX 1400

	PLC		Cables		Interfaces					
	Input/Output cards		Standard		Direct inputs/outputs		Insulated inputs		Insulated outputs	
					- see page A.37 (H,R) or A.55 (A) -		- see page A.61 -		- see page A.65 -	
	Manufacturer code	Number/Type of channels	Order No.	Quantity	Type	Quantity	Type	Quantity	Type	Quantity
DI	1762-IA8	16 DI	7789108xxx	1	R1208	1				
	1762-IQ16	16 DI	7789100xxx	1	H2016	1	I2016	1		
	1762-IQ32T	16 DI, positive logic	7789005xxx	1	H2016	2	I2016	2		
		16 DI, negative logic	7789670xxx	1	H2016	2				
	1762-IQ8	8 DI	7789100xxx	1	H2008	1				
DO	1762-OA8	8 DO	7789108xxx	1	R1208	1				
	1762-OB16	16 DO	7789100xxx	1	H2016	1			O2016	1
	1762-OB32T	32 DO	7789006xxx	1	H2016	2			O2032	2
	1762-OB8	8 DO	7789100xxx	1	H2008	1			O2008	1
	1762-OV32T A)	32 DO	7789006xxx	1	H2016	2			O2016N	2
	1762-OW16	16 DO	7789104xxx	1	R2416	1				
	1762-OW8	8 DO	7789108xxx	1	R1208	1				
	1762-0X6I	6 DO	7789106xxx	1	R3632	1				
DI/DO	1762-IQ80W6	8 DI, positive logic	7789100xxx	1	H2008	1				
		6 DO	7789108xxx	1	R1208	1				
	1762-IQ80W6 A)	8 DI, negative logic	7789100xxx	1	H2016	1				
		6 DO	7789108xxx	1	R1208	1				
AI	1762-IF4	4 AI	1350480xxx	1	A1504	1				
	1762-IR4	4 AI, 2-wire applications	1350480xxx	1	A1504	1				
	1762-IR4 B)	4 AI, 3 and 4-wire applications	1350490xxx	1	A2508	1				
AO	1762-OF4	4 AO	1350480xxx	1	A1504	1				
AI/AO	1762-IF20F2	2 AI	1350480xxx	1	A1504	1				
		2 AO								
Note	A) Attention! Use only interfaces without LEDs for the direct option. B) Attention! Only use Interfaces without disconnectors and test points									

- Please, always take into account the characteristics of the PLC card (voltage, current...) when selecting interfaces. In some cases, the card can work at higher voltages than those indicated in the interface.
- Cables 7789100xxx, 7789104xxx, 7789106xxx, 7789108xxx, 1350480xxx, 1350490xxx and 1350500xxx have wire-end ferrules at one end. These cables do not have a PLC connector. Colour code according to DIN 47100.
- The interfaces are intended to be used inside an IP20 enclosure at least.
- The last 3 digits of the cable code indicate its length in decimetres. For example, if the code ends in 100, the cable would be 10 m long.

* In the case that an input/output card does not appear in this table, you can check our on-line PLC selection guide at www.weidmueller.com where you will always find the most up-to-date information.

PLC SCHNEIDER – M258

	PLC		Cables		Interfaces					
	Input/Output cards		Standard		Direct inputs/outputs		Insulated inputs		Insulated outputs	
					- see page A.37 (H,R) or A.55 (A) -		- see page A.61 -		- see page A.65 -	
	Manufacturer code	Number/Type of channels	Order No.	Quantity	Type	Quantity	Type	Quantity	Type	Quantity
DI	TM5SDI12D	12 DI	7789840xxx	1	H2012	1				
	TM5SDI2D	2 DI	7789100xxx	1	H20	1				
	TM5SDI4A	4 DI	7789854xxx	1	R1208	1				
	TM5SDI4D	4 DI	7789100xxx	1	H20	1				
	TM5SDI6A	6 DI	7789855xxx	1	R1208	1				
	TM5SDI6D	6 DI	7789100xxx	1	H20	1				
DO	TM5SDO12T	12 DO	7789840xxx	1	H2012	1			O2012	1
	TM5SDO2T	2 DO	7789100xxx	1	H20	1				
	TM5SDO4R	4 DO	7789858xxx	1	R1208	1				
	TM5SDO4T	4 DO	7789100xxx	1	H20	1				
	TM5SDO4TA	4 DO	7789100xxx	1	H20	1				
	TM5SDO6T	6 DO	7789100xxx	1	H20	1				
	TM5SDO8TA	8 DO	7789857xxx	1	H2008	1			O2008	1
DI/DO	TM5SDM12DT	8 DI	7789859xxx	1	H2008	1				
		4 DO			H2008	1			O2008	1
AI	TM5SAI2H	2 AI	7789841xxx	1	A1504M	1				
	TM5SAI2L	2 AI	7789841xxx	1	A1504M	1				
	TM5SAI2PH	2 AI	7789841xxx	1	A15	1				
	TM5SAI4H	4 AI	7789841xxx	1	A1504M	1				
	TM5SAI4L	4 AI	7789841xxx	1	A1504M	1				
	TM5SAI4PH	4 AI	7789841xxx	1	A15	1				
AO	TM5SAO2H	2 AO	7789841xxx	1	A1504M	1				
	TM5SAO2L	2 AO	7789841xxx	1	A1504M	1				
	TM5SAO4H	4 AO	7789841xxx	1	A1504M	1				
	TM5SAO4L	4 AO	7789841xxx	1	A1504M	1				
Note										

- Please, always take into account the characteristics of the PLC card (voltage, current...) when selecting interfaces. In some cases, the card can work at higher voltages than those indicated in the interface.
 - Cables 7789100xxx, 7789104xxx, 7789106xxx, 7789108xxx, 1350480xxx, 1350490xxx and 1350500xxx have wire-end ferrules at one end. These cables do not have a PLC connector. Colour code according to DIN 47100.
 - The interfaces are intended to be used inside an IP20 enclosure at least.
 - The last 3 digits of the cable code indicate its length in decimetres. For example, if the code ends in 100, the cable would be 10 m long.
- * In the case that an input/output card does not appear in this table, you can check our on-line PLC selection guide at www.weidmueller.com where you will always find the most up-to-date information.


PLC SCHNEIDER – M340



	PLC		Cables		Interfaces					
	Input/Output cards		Standard		Direct inputs/outputs		Insulated inputs		Insulated outputs	
					- see page A.37 (H,R) or A.55 (A) -		- see page A.61 -		- see page A.65 -	
	Manufacturer code	Number/Type of channels	Order No.	Quantity	Type	Quantity	Type	Quantity	Type	Quantity
DI	BMX DAI 1602	16 DI, negative logic ^{A)}	7789630xxx	1	H2016	1				
		16 DI, positive logic	7789382xxx	1	R2416	1				
	BMX DAI 1603	16 DI	7789382xxx	1	R2416	1				
	BMX DAI 1604	16 DI	7789382xxx	1	R2416	1				
	BMX DDI 1602	16 DI	7789380xxx	1	H2016	1	I2016	1		
	BMX DDI 1603	16 DI	7789382xxx	1	R2416	1				
DO	BMX DDI 3202 K	32 DI	7789387xxx	1	H2016	2	I2016	2		
	BMX DDI 6402 K	64 DI	7789387xxx	2	H2016	4	I2016	4		
	BMX DAO 1605	16 DO	7789383xxx	1	R2416	1				
	BMX DDO 1602	16 DO	7789380xxx	1	H2016	1			O2016	1
	BMX DDO 1612 ^{B)}	16 DO	7789380xxx	1	H2016	1			O2016N	1
	BMX DDO 3202 K	32 DO	7789387xxx	1	H2016	2			O2016	2
DI/DO	BMX DDO 6402 K	64 DO	7789387xxx	2	H2016	4			O2016	4
	BMX DRA 0805	8 DO	7789633xxx	1	R2416	1				
	BMX DRA 1605	16 DO	7789384xxx	1	R2416	1				
	BMX DDM 16022	8 DI	7789386xxx	1	H2008	1				
		8 DO			H2008	1			O2008	1
	BMX DDM 16025	8 DI	7789635xxx	1	H2008	1				
AI		8 DO			R1208	1				
	BMX DDM 3202 K	16 DI	7789387xxx	1	H2016	1				
		16 DO			H2016	1			O2016	1
	BMX AMI 0410	4 AI, current applications	7789638xxx	1	A1504	1				
	BMX AMI 0410	4 AI, voltage applications	7789637xxx	1	A1504	1				
	BMX ART 0414	4 AI	7789639xxx	1	A3716	1				
AO	BMX AMI 0810	8AI, current applications	7789846xxx	1	A2508	1				
	BMX AMI 0800	8AI, current applications	7789846xxx	1	A2508	1				
	BMX AMI 0800	8AI, voltage/current applications	1479600xxx	1	H40	1				
	BMX ART 0814	8 AI	7789639xxx	2	A3716	2				
	BMX AMO 0210	2 AO	7789640xxx	1	A1504	1				
	BMX AMO 0410	4 AO	7789637xxx	1	A1504	1				
AI/AO	BMX AMO 0802	8 AO	7789847xxx	1	A2508	1				
	BMX AMM 0600	4 AI + 2 AO, current applications	7789629xxx	1	A1504	2				
	BMX AMM 0600	4 AI + 2 AO, voltage applications	7789628xxx	1	A1504	2				
Note A) Attention! Only use interfaces without LEDs B) Attention! Use only interfaces without LEDs for the direct option.										

- Please, always take into account the characteristics of the PLC card (voltage, current...) when selecting interfaces. In some cases, the card can work at higher voltages than those indicated in the interface.
 - The interfaces are intended to be used inside an IP20 enclosure at least.
 - The last 3 digits of the cable code indicate its length in decimetres. For example, if the code ends in 100, the cable would be 10 m long.
- * In the case that an input/output card does not appear in this table, you can check our on-line PLC selection guide at www.weidmueller.com where you will always find the most up-to-date information.

PLC SCHNEIDER – MICRO

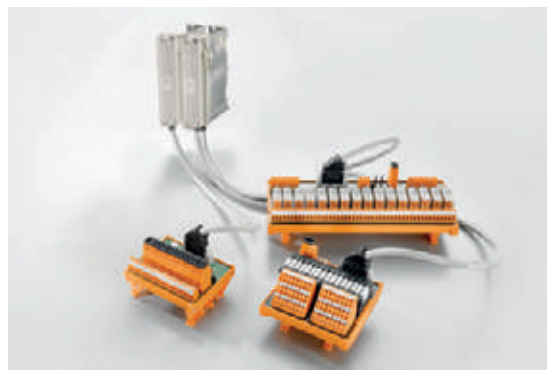

	PLC		Cables		Interfaces					
	Input/Output cards		Standard		Direct inputs/outputs		Insulated inputs		Insulated outputs	
					- see page A.37 (H,R) or A.55 (A) -		- see page A.61 -		- see page A.65 -	
	Manufacturer code	Number/Type of channels	Order No.	Quantity	Type	Quantity	Type	Quantity	Type	Quantity
DI	TSX DEZ 08A4	8 DI	7789307xxx	1	R1208	1				
	TSX DEZ 08A5	8 DI	7789307xxx	1	R1208	1				
	TSX DEZ 12D2 ^{A)}	12 DI	7789312xxx	1	H2016	1				
	TSX DEZ 12D2K	12 DI	7789301xxx	1	H2012	1				
	TSX DEZ 32D2	32 DI	7789314xxx	1	H2016	2	I2016	2		
	TSX DSZ 32R5	32 DI	7789330xxx	1	R3632	1				
DO	TSX DSZ 32T2	32 DI	7789314xxx	1	H2016	2	I2016	2		
	TSX DSZ 04T22	4 DO	7789312xxx	1	H2008	1			O2008	1
	TSX DSZ 08R5	16 DO	7789308xxx	1	R2416	1				
	TSX DSZ 08T2	8 DO	7789312xxx	1	H2008	1			O2008	1
DI/DO	TSX DMZ 16DTK	8 DI	7789834xxx	1	H2008	1				
		8 DO			H2008	1			O2008	1
	TSX DMZ 28AR	16 DI	7789331xxx	1	R2416	1				
		12 DO			R2416	1				
	TSX DMZ 28DR	16 DI	7789331xxx	1	R2416	1				
		12 DO			R2416	1				
	TSX DMZ 28DT	16 DI	7789313xxx	1	H2016	1				
		12 DO			H2016	1			O2016	1
	TSX DMZ 28DTK	16 DI	7789301xxx	1	H2016	1				
		12 DO	7789301xxx	1	H2012	1			O2012	1
AI	TSX AEZ 414	4 AI	7789309xxx	1	A1504	1				
	TSX AEZ 801	8 AI	7789311xxx	1	A2508	1				
	TSX AEZ 802	8 AI	7789311xxx	1	A2508	1				
AO	TSX ASZ 200	2 AO	7789310xxx	1	A1504	1				
	TSX ASZ 401	4 AO	7789310xxx	1	A1504	1				
Note A) Attention! Only use interfaces without LEDs										

- Please, always take into account the characteristics of the PLC card (voltage, current...) when selecting interfaces. In some cases, the card can work at higher voltages than those indicated in the interface.
 - The interfaces are intended to be used inside an IP20 enclosure at least.
 - The last 3 digits of the cable code indicate its length in decimetres. For example, if the code ends in 100, the cable would be 10 m long.
- * In the case that an input/output card does not appear in this table, you can check our on-line PLC selection guide at www.weidmueller.com where you will always find the most up-to-date information.

PLC SCHNEIDER – PREMIUM



	PLC		Cables		Interfaces					
	Input/Output cards		Standard		Direct inputs/outputs		Insulated inputs		Insulated outputs	
					- see page A.37 (H,R) or A.55 (A) -		- see page A.61 -		- see page A.65 -	
	Manufacturer code	Number/Type of channels	Order No.	Quantity	Type	Quantity	Type	Quantity	Type	Quantity
DI	TSX DEY 08D2	8 DI	7789322xxx	1	H2008	1				
	TSX DEY 16A2	16 DI	7789315xxx	1	R2416	1				
	TSX DEY 16A3	16 DI	7789315xxx	1	R2416	1				
	TSX DEY 16A4	16 DI	7789315xxx	1	R2416	1				
	TSX DEY 16A5	16 DI	7789315xxx	1	R2416	1				
	TSX DEY 16D2	16 DI	7789322xxx	1	H2016	1	I2016	1		
	TSX DEY 16D3	16 DI	7789322xxx	1	H2016	1	I2016	1		
	TSX DEY 16FK	16 DI	7789301xxx	1	H2016	1	I2016	1		
	TSX DEY 32D2K	32 DI	7789301xxx	2	H2016	2	I2016	2		
	TSX DEY 32D3K ^{A)}	32 DI	7789301xxx	2	H2016	2				
DO	TSX DEY 64D2K	64 DI	7789301xxx	4	H2016	4	I2016	4		
	TSX DSY 08R4D	8 DO	7789318xxx	1	R2416	1				
	TSX DSY 08R5	8 DO	7789316xxx	1	R2416	1				
	TSX DSY 08R5A	8 DO	7789318xxx	1	R2416	1				
	TSX DSY 08S5	8 DO	7789316xxx	1	R2416	1				
	TSX DSY 08T2	8 DO	7789322xxx	1	H2008	1			02008	1
	TSX DSY 08T22	8 DO	7789317xxx	1	R1208	1				
	TSX DSY 08T31	8 DO	7789317xxx	1	R1208	1				
	TSX DSY 16R5	16 DO	7789316xxx	1	R2416	1				
	TSX DSY 16S4	16 DO	7789316xxx	1	R2416	1				
	TSX DSY 16T2	16 DO	7789322xxx	1	H2016	1			02016	1
	TSX DSY 16T3 ^{A)}	16 DO	7789322xxx	1	H2016	1				
	TSX DSY 32T2K	32 DO	7789301xxx	2	H2016	2			02016	2
	TSX DSY 64T2K	64 DO	7789301xxx	4	H2016	4			02016	4
AI	TSX AEY 1600	16 AI	1349980xxx	2	A2508P	2				
	TSZ AEY 414	4 AI, resistances applications	7789319xxx	1	A2508P	1				
	TSX AEY 414	4 AI, current and voltage applications	7789320xxx	1	A1504	1				
	TSX AEY 420	4 AI	1349980xxx	1	A2508P	1				
	TSX AEY 800	8 AI	1349980xxx	1	A2508P	1				
	TSX AEY 810	8 AI	7789261xxx	1	A2508P	1				
AO	TSX ASY 410	4 AO, current applications	7789320xxx	1	A1504	1				
	TSX ASY 410	4 AO, voltage applications	7789321xxx	1	A1504	1				
	TSX ASY 800	8 AO	1349980xxx	1	A2508P	1				
Note A) Attention! Only use interfaces without LEDs										

- Please, always take into account the characteristics of the PLC card (voltage, current...) when selecting interfaces. In some cases, the card can work at higher voltages than those indicated in the interface.
- The interfaces are intended to be used inside an IP20 enclosure at least.
- The last 3 digits of the cable code indicate its length in decimetres. For example, if the code ends in 100, the cable would be 10 m long.

* In the case that an input/output card does not appear in this table, you can check our on-line PLC selection guide at www.weidmueller.com where you will always find the most up-to-date information.

PLC SCHNEIDER – QUANTUM



	PLC		Cables		Interfaces					
	Input/Output cards		Standard		Direct inputs/outputs		Insulated inputs		Insulated outputs	
					- see page A.37 (H,R) or A.55 (A) -		- see page A.61 -		- see page A.65 -	
	Manufacturer code	Number/Type of channels	Order No.	Quantity	Type	Quantity	Type	Quantity	Type	Quantity
DI	140 DAI 340 00	16 DI	7789118xxx	1	R3632	1				
	140 DAI 353 00	32 DI	7789118xxx	1	R3632	1				
	140 DAI 440 00	16 DI	7789118xxx	1	R3632	1				
	140 DAI 453 00	32 DI	7789118xxx	1	R3632	1				
	140 DAI 540 00	16 DI	7789118xxx	1	R3632	1				
	140 DAI 543 00	16 DI	7789113xxx	1	R2416	1				
	140 DAI 553 00	32 DI	7789118xxx	1	R3632	1				
	140 DAI 740 00	16 DI	7789118xxx	1	R3632	1				
	140 DDI 353 00	32 DI	7789121xxx	1	H2016	2	I2016	2		
	140 DDI 364 00	96 DI	7789301xxx	6	H2016	6	I2016	6		
	140 DDI 841 00	16 DI	7789119xxx	1	H2016	1	I2016	1		
	140 DDI 853 00	32 DI	7789121xxx	1	H2016	2	I2016	2		
DO	140 DAO 840 00	16 DO	7789118xxx	1	R3632	1				
	140 DAO 842 10	16 DO	7789113xxx	1	R2416	1				
	140 DDO 353 00	32 DO	7789121xxx	1	H2016	2			O2016	2
	140 DDO 364 00	96 DO	7789301xxx	6	H2016	6			O2016	6
	140 DDO 843 00	16 DO	7789120xxx	1	H2016	1			O2016	1
	140 DRA 840 00	16 DO	7789118xxx	1	R3632	1				
DI/DO	140 DDM 390 00	16 DI	7789133xxx	1	H2016	1				
		8 DO			H2008	1			O2008	1
AI	140 ACI 030 00	8 AI, current applications	7789125xxx	1	A2508	1				
	140 ACI 030 00	8 AI, voltage applications	7789134xxx	1	A2508	1				
	140 ACI 040 00	16 AI	7789123xxx	1	A3716	1				
	140 AII 330 00	8 AI, 2-wire resistances applications	7789136xxx	1	A2508	1				
	140 ARI 030 10	8 AI, 2-wire resistances applications	7789135xxx	1	A2508	1				
	140 AVI 030 00	8 AI, current applications	7789125xxx	1	A2508	1				
AO	140 AVI 030 00	8 AI, voltage applications	7789134xxx	1	A2508	1				
	140 ACO 020 00	4 AO	7789124xxx	1	A1504	1				
	140 ACO 130 00	8 AO, without monitoring	7789126xxx	1	A2508	1				
	140 AIO 330 00	8 AIO	7789137xxx	1	A2508	1				
Note										

- Please, always take into account the characteristics of the PLC card (voltage, current...) when selecting interfaces. In some cases, the card can work at higher voltages than those indicated in the interface.
 - The interfaces are intended to be used inside an IP20 enclosure at least.
 - The last 3 digits of the cable code indicate its length in decimetres. For example, if the code ends in 100, the cable would be 10 m long.
- * In the case that an input/output card does not appear in this table, you can check our on-line PLC selection guide at www.weidmuller.com where you will always find the most up-to-date information.

PLC SCHNEIDER – TWIDO



	PLC		Cables		Interfaces					
	Input/Output cards		Standard		Direct inputs/outputs		Insulated inputs		Insulated outputs	
					- see page A.37 (H,R) or A.55 (A) -		- see page A.61 -		- see page A.65 -	
	Manufacturer code	Number/Type of channels	Order No.	Quantity	Type	Quantity	Type	Quantity	Type	Quantity
DI	TWD DDI 16DK	16 DI, positive logic	7789328xxx	1	H2016	1	I2016	1		
	TWD DDI 16DT	16 DI, positive logic	7789100xxx	1	H2016	1	I2016	1		
	TWD DDI 16DT ^{A)}	16 DI, negative logic	7789100xxx	1	H2016	1				
	TWD DDI 32DK	32 DI	7789328xxx	2	H2016	2	I2016	2		
	TWD DDI 8DT	8 DI, positive logic	7789100xxx	1	H2008	1	I2016	1		
	TWD DDI 8DT ^{A)}	8 DI, negative logic	7789100xxx	1	H2016	1				
DO	TWD DDO 16TK	16 DO	7789329xxx	1	H2016	1			O2016	1
	TWD DDO 16UK ^{B)}	16 DO	7789328xxx	1	H2016	1			O2016N	1
	TWD DDO 32TK	32 DO	7789329xxx	2	H2016	2			O2016	2
	TWD DDO 32UK ^{B)}	32 DO	7789328xxx	2	H2016	2			O2016N	2
	TWD DDO 8TT	8 DO	7789100xxx	1	H2008	1			O2008	1
	TWD DDO 8UT ^{A)}	8 DO	7789100xxx	1	H2016	1				
	TWD DRA 16RT	16 DO	7789104xxx	1	R2416	1				
	TWD DRA 8RT	8 DO	7789108xxx	1	R1208	1				
DI/DO	TWD LMDA 20DRT	12 DI, positive logic	7789100xxx	1	H2012	1				
		8 DO	7789104xxx		R2416	1				
	TWD LMDA 20DRT ^{B)}	12 DI, negative logic	7789100xxx	1	H2016	1				
		8 DO	7789104xxx		R2416	1				
	TWD LMDA 20DTK	12 DI, positive logic	7789327xxx	1	H2012	1			O2016	1
		8 DO			H2016	1				
	TWD LMDA 20DUK ^{C)}	12 DI, positive logic	7789326xxx	1	H2012	1				
		8 DO			H2016	1				
	TWD LMDA 40DTK	24 DI, positive logic	7789327xxx	2	H2012	2				
		16 DO			H2008	2			O2008	2
AI	TWD AMI 2HT	2 AI	1350480xxx	1	A1504	1				
	TWD AMO 1HT	1 AI	1350480xxx	1	A1504	1				
AI/AO	TWD ALM 3LT	2 AI	1350480xxx	1	A1504	1				
		1 AO				1				
	TWD AMM 3HT	2 AI	1350480xxx	1	A1504	1				
		1 AO				1				
Note A) Attention! Only use interfaces without LEDs B) Attention! Use only interfaces without LEDs for the direct option. C) Attention! Use only interfaces without LEDs for the direct output option.										

- Please, always take into account the characteristics of the PLC card (voltage, current...) when selecting interfaces. In some cases, the card can work at higher voltages than those indicated in the interface.
 - Cables 7789100xxx, 7789104xxx, 7789106xxx, 7789108xxx, 1350480xxx, 1350490xxx and 1350500xxx have wire-end ferrules at one end. These cables do not have a PLC connector. Colour code according to DIN 47100.
 - The interfaces are intended to be used inside an IP20 enclosure at least.
 - The last 3 digits of the cable code indicate its length in decimetres. For example, if the code ends in 100, the cable would be 10 m long.
- * In the case that an input/output card does not appear in this table, you can check our on-line PLC selection guide at www.weidmueller.com where you will always find the most up-to-date information.

PLC SIEMENS – S7-200

	PLC		Cables		Interfaces					
	Input/Output cards		Standard		Direct inputs/outputs		Insulated inputs		Insulated outputs	
					- see page A.37 (H,R) or A.55 (A) -		- see page A.61 -		- see page A.65 -	
	Manufacturer code	Number/Type of channels	Order No.	Quantity	Type	Quantity	Type	Quantity	Type	Quantity
DI	6ES7221-1BF22-0XA0	8 DI	7789100xxx	1	H2008	1				
	6ES7221-1BH22-0XA0	16 DI	7789100xxx	1	H2016	1	I2016	1		
	6ES7221-1EF22-0XA0	8 DI	7789104xxx	1	R2416	1				
DO	6ES7222-1BD22-0XA0	4 DO	7789100xxx	1	H2008	1			O2008	1
	6ES7222-1BF22-0XA0	8 DO	7789100xxx	1	H2008	1			O2008	1
	6ES7222-1EF22-0XA0	8 DO	7789104xxx	1	R2416	1				
	6ES7222-1HD22-0XA0	8 DO	7789104xxx	1	R2416	1				
DI/DO	6ES7223-1BF22-0AX0	4 DI	7789100xxx	2	H2008	1				
		4 DO			H2008	1			O2008	1
	6ES7223-1BH22-0XA0	8 DI	7789100xxx	2	H2008	1				
		8 DO			H2008	1			O2008	1
	6ES7223-1BL22-0XA0	16 DI	7789100xxx	2	H2016	1				
		16 DO			H2016	1			O2016	1
	6ES7223-1BM22-0XA0	32 DI	7789100xxx	4	H2016	2				
		32 DO			H2016	2			O2016	2
	6ES7223-1HF22-0XA0	4 DI	7789100xxx	1	H2008	1				
		4 DO	7789108xxx	1	R1208	1				
	6ES7223-1PH22-0XA0	8 DI	7789100xxx	1	H2008	1				
		8 DO	7789108xxx	1	R1208	1				
	6ES7223-1PL22-0XA0	16 DI	7789100xxx	1	H2016	1				
		16 DO	7789104xxx	1	R2416	1				
6ES223-1PM22-0XA0	32 DI	7789100xxx	2	H2016	2					
	32 DO	7789104xxx	2	R2416	2					
AI	6ES7231-0HC22-0XA0	4 AI	1350480xxx	1	A1504	1				
	6ES7231-0HF22-0XA0	8 AI	1350490xxx	1	A2508	1				
AO	6ES7232-0HB22-0XA0	2 AO	1350480xxx	1	A1504	1				
	6ES7232-0HD22-0XA0	4 AO	1350480xxx	1	A1504	1				
AI/AO	6ES7235-0KD22-0XA0	4 AI / 1 AO	1350490xxx	1	A2508	1				
DI/DO/AI	6ES7-214-1AE30-0XB0	14 DI	7789100xxx	1	H2016	1				
		10 DO	7789100xxx	1	H2012	1				
		2 AI	1350480xxx	1	A1504	1				
	6ES7-214-1AG31-0XB0	14 DI	7789100xxx	1	H2016	1				
		10 DO	7789100xxx	1	H2012	1				
		2 AI	1350480xxx	1	A1504	1				
Note										

- Please, always take into account the characteristics of the PLC card (voltage, current...) when selecting interfaces. In some cases, the card can work at higher voltages than those indicated in the interface.
 - Cables 7789100xxx, 7789104xxx, 7789106xxx, 7789108xxx, 1350480xxx, 1350490xxx and 1350500xxx have wire-end ferrules at one end. These cables do not have a PLC connector. Colour code according to DIN 47100.
 - The interfaces are intended to be used inside an IP20 enclosure at least.
 - The last 3 digits of the cable code indicate its length in decimetres. For example, if the code ends in 100, the cable would be 10 m long.
- * In the case that an input/output card does not appear in this table, you can check our on-line PLC selection guide at www.weidmueller.com where you will always find the most up-to-date information.

PLC SIEMENS – S7-300/ET- 200M



	PLC		Cables		Interfaces					
	Input/Output cards		Standard		Direct inputs/outputs		Insulated inputs		Insulated outputs	
					- see page A.37 (H,R) or A.55 (A) -		- see page A.61 -		- see page A.65 -	
	Manufacturer code	Number/Type of channels	Order No.	Quantity	Type	Quantity	Type	Quantity	Type	Quantity
DI	6ES7321-1BH00-0AA0	16 DI	7789234xxx	1	H2016	1	I2016	1		
	6ES7321-1BH01-0AA0	16 DI	7789234xxx	1	H2016	1	I2016	1		
	6ES7321-1BH02-0AA0	16 DI	7789234xxx	1	H2016	1	I2016	1		
	6ES7321-1BH50-0AA0	16 DI	7789234xxx	1	H2016	1	I2016	1		
	6ES7321-1BH80-0AA0	16 DI	7789234xxx	1	H2016	1	I2016	1		
	6ES7321-1BH81-0AA0	16 DI	7789234xxx	1	H2016	1	I2016	1		
	6ES7321-1BH82-0AA0	16 DI	7789234xxx	1	H2016	1	I2016	1		
	6ES7321-1BL00-0AA0	32 DI	7789236xxx	1	H2016	2	I2016	2		
	6ES7321-1BL80-0AA0	32 DI	7789236xxx	1	H2016	2	I2016	2		
	6ES7321-1BP00-0AA0	64 DI, positive logic	7789771xxx	2	H2016	4	I2016	4		
		64 DI, negative logic ^{A)}	7789768xxx	2	H2016	4				
	6ES7321-1CH20-0AA0	16 DI	7789211xxx	1	R2416	1				
	6ES7321-1CH80-0AA0	16 DI	7789211xxx	1	R2416	1				
	6ES7321-1EH00-0AA0	16 DI	7789212xxx	1	R2416	1				
	6ES7321-1EH01-0AA0	16 DI	7789212xxx	1	R2416	1				
	6ES7321-1EL00-0AA0	32 DI	7789215xxx	1	R3632	1				
	6ES7321-1FF00-0AA0	8 DI	7789219xxx	1	R1208	1				
	6ES7321-1FF01-0AA0	8 DI	7789219xxx	1	R1208	1				
	6ES7321-1FF81-0AA0	8 DI	7789219xxx	1	R1208	1				
	6ES7321-1FH00-0AA0	16 DI	7789212xxx	1	R2416	1				
	6ES7321-7BH00-0AB0	16 DI	7789210xxx	1	R2416	1				
	6ES7321-7BH01-0AB0	16 DI	7789210xxx	1	R2416	1				
	6ES7321-7BH80-0AB0	16 DI	7789210xxx	1	R2416	1				
	6ES7321-7RD00-0AB0	16 DI	2183160xxx	1	H20	1				
	6ES7326-1BK02-0AB0	24 DI	2183170xxx	1	H40	1				
DO	6ES7322-1BF00-0AA0	8 DO	7789239xxx	1	H2008	1			02008	1
	6ES7322-1BF01-0AA0	8 DO	7789239xxx	1	H2008	1			02008	1
	6ES7322-1BH00-0AA0	16 DO	7789234xxx	1	H2016	1			02016	1
	6ES7322-1BH01-0AA0	16 DO	7789234xxx	1	H2016	1			02016	1
	6ES7322-1BH10-0AA0	16 DO	7789234xxx	1	H2016	1			02016	1
	6ES7322-1BH81-0AA0	16 DO	7789234xxx	1	H2016	1			02016	1
	6ES7322-1BL00-0AA0	32 DO	7789236xxx	1	H2016	2			02016	2
	6ES7322-1BP00-0AA0	64 DO	7789246xxx	2	H2016	4			02016	4
	6ES7322-1BP50-0AA0 ^{A)}	64 DO	7789246xxx	2	H2016	4			02016N	4
	6ES7322-1CF00-0AA0	8 DO	7789191xxx	1	R1208	1				
	6ES7322-1CF80-0AA0	8 DO	7789191xxx	1	R1208	1				
	6ES7322-1EH00-0AA0	16 DO	7789211xxx	1	R2416	1				
	6ES7322-1EH01-0AA0	16 DO	7789211xxx	1	R2416	1				
	6ES7322-1EL00-0AA0	32 DO	7789211xxx	2	R2416	2				
	6ES7322-1FF00-0AA0	8 DO	7789219xxx	1	R1208	1				
	6ES7322-1FF01-0AA0	8 DO	7789219xxx	1	R1208	1				
	6ES7322-1FF81-0AA0	8 DO	7789219xxx	1	R1208	1				
	6ES7322-1FH00-0AA0	16 DO	7789211xxx	1	R2416	1				
	6ES7322-1FL00-0AA0	32 DO	7789211xxx	2	R2416	2				
	6ES7322-1HF80-0AA0	8 DO	7789190xxx	1	R2416	1				
	6ES7322-1HH01-0AA0	16 DO, Only for 24 V DC	7789214xxx	1	H2016	1				
	6ES7322-5GH00-0AB0	16 DO	7789215xxx	1	R3632	1				
	6ES7322-5RD00-0AB0 ^{B)}	4 DO	7789192xxx	1	H2016	1				
	6ES7322-5SD00-0AB0 ^{B)}	4 DO	7789192xxx	1	H2016	1				
	6ES7322-8BF00-0AB0	8 DO, without redundancy	7789239xxx	1	H2008	1			02008	1
	6ES7322-8BF00-0AB0	8 DO, with redundancy	7789830xxx	1	H2008	1			02008	1
	6ES7322-8BH01-0AB0	16 DO, without redundancy	7789729xxx	1	H2016	1			02016	1
	6ES7322-8BH01-0AB0	16 DO, with redundancy	7789730xxx	1	H2016	1			02016	1
	6ES7326-2BF10-0AB0	16 DO	2183170xxx	1	H40	1				
	6ES7326-2BF41-0AB0	8 DO	2183170xxx	1	H40	1				
DI/DO	6ES7323-1BH00-0AA0	8 DI	7789237xxx	1	H2008	1				
		8 DO			H2008	1			02008	1
	6ES7323-1BH01-0AA0	8 DI	7789237xxx	1	H2008	1				
		8 DO			H2008	1			02008	1
	6ES7323-1BH80-0AA0	8 DI	7789237xxx	1	H2008	1				
		8 DO			H2008	1			02008	1
	6ES7323-1BH80-0AA0	8 DI	7789237xxx	1	H2008	1				
		8 DO			H2008	1			02008	1

PLC SIEMENS – S7-300 / ET-200M

	PLC		Cables		Interfaces					
	Input/Output cards		Standard		Direct inputs/outputs		Insulated inputs		Insulated outputs	
					- see page A.37 (H,R) or A.55 (A) -		- see page A.61 -		- see page A.65 -	
	Manufacturer code	Number/Type of channels	Order No.	Quantity	Type	Quantity	Type	Quantity	Type	Quantity
DI/DO	6ES7323-1BL00-0AA0	16 DI	7789236xxx	1	H2016	1	I2016	1		
		16 DO			H2016	1			O2016	1
AI	6ES7331-7HF01-0AB0	8 AI	7789801xxx	1	H20	1				
	6ES7331-1KF01-0AB0	8 AI	7789604xxx	1	A3716	1				
	6ES7331-1KF02-0AB0	8 AI	7789604xxx	1	A3716	1				
	6ES7331-7KB00-0AB0	2 AI	7789224xxx	1	A1504	1				
	6ES7331-7KB01-0AB0	2 AI	7789224xxx	1	A1504	1				
	6ES7331-7KB02-0AB0	2 AI	7789224xxx	1	A1504	1				
	6ES7331-7KF00-0AB0	8 AI	7789229xxx	1	A2508	1				
	6ES7331-7KF01-0AB0	8 AI	7789229xxx	1	A2508	1				
	6ES7331-7KF02-0AB0	8 AI	7789229xxx	1	A2508	1				
	6ES7331-7NF00-0AB0	8 AI	7789231xxx	1	A3716	1				
	6ES7331-7NF10-0AB0	8 AI, voltage application	7789233xxx	1	A2508	1				
		8 AI, current application	7789759xxx	1	H40	1				
	6ES7331-7PF00-0AB0	8 AI, 2-wire applications	7789230xxx	1	A2508	1				
	6ES7331-7PF00-0AB0	8 AI, 3 and 4-wire applications	7789759xxx	1	H40	1				
	6ES7331-7PF01-0AB0	8 AI, 2-wire applications	7789230xxx	1	A2508	1				
	6ES7331-7PF01-0AB0	8 AI, 3 and 4-wire applications	7789759xxx	1	H40	1				
	6ES7331-7RD00-0AB0	4 AI, 2-wire applications	7789193xxx	1	A1504	1				
	6ES7331-7RD00-0AB0	4 AI, 4-wire applications	7789194xxx	1	A2508	1				
	6ES7331-7TF01-0AB0	8 AI, 2-wire applications	7789229xxx	1	A2508	1				
	6ES7331-7TF01-0AB0	8 AI, 4-wire applications	7789800xxx	1	A2508	1				
	6ES7336-4GE00-0AB0	6 AI	7789801xxx	1	H20	1				
AO	6ES7332-5HB00-0AB0	2 AO, 2-wire voltage applications	7789228xxx	1	A1504	1				
	6ES7332-5HB00-0AB0	2 AO, 4-wire voltage applications	7789801xxx	1	H20	1				
	6ES7332-5HB00-0AB0	2 AO, current applications	7789227xxx	1	A1504	1				
	6ES7332-5HB01-0AB0	2 AO, 2-wire voltage applications	7789228xxx	1	A1504	1				
	6ES7332-5HB01-0AB0	2 AO, 4-wire voltage applications	7789801xxx	1	H20	1				
	6ES7332-5HB01-0AB0	2 AO, current applications	7789227xxx	1	A1504	1				
	6ES7332-5HB81-0AB0	2 AO, 2-wire voltage applications	7789228xxx	1	A1504	1				
	6ES7332-5HB81-0AB0	2 AO, 4-wire voltage applications	7789801xxx	1	H20	1				
	6ES7332-5HB81-0AB0	2 AO, current applications	7789227xxx	1	A1504	1				
	6ES7332-5HD00-0AB0	4 AO, 2-wire voltage applications	7789228xxx	1	A1504	1				
	6ES7332-5HD00-0AB0	4 AO, 4-wire voltage applications	7789801xxx	1	H20	1				
	6ES7332-5HD00-0AB0	4 AO, current applications	7789227xxx	1	A1504	1				
	6ES7332-5HD01-0AB0	4 AO, 2-wire voltage applications	7789228xxx	1	A1504	1				
	6ES7332-5HD01-0AB0	4 AO, 4-wire voltage applications	7789801xxx	1	H20	1				
	6ES7332-5HD01-0AB0	4 AO, current applications	7789227xxx	1	A1504	1				
	6ES7332-5HF00-0AB0	8 AO, voltage applications	7789759xxx	1	H40	1				
	6ES7332-5HF00-0AB0	8 AO, current applications	7789233xxx	1	A2508	1				
	6ES7332-5RD00-0AB0	4 AO	7789195xxx	1	A1504	1				
	6ES7332-7ND01-0AB0	4 AO, 2-wire voltage applications	7789228xxx	1	A1504	1				
	6ES7332-7ND01-0AB0	4 AO, 4-wire voltage applications	7789801xxx	1	H20	1				
	6ES7332-7ND01-0AB0	4 AO, current applications	7789227xxx	1	A1504	1				
	6ES7332-7ND02-0AB0	4 AO, 2-wire voltage applications	7789228xxx	1	A1504	1				
	6ES7332-7ND02-0AB0	4 AO, 4-wire voltage applications	7789801xxx	1	H20	1				
	6ES7332-7ND02-0AB0	4 AO, current applications	7789227xxx	1	A1504	1				
	6ES7332-8TF01-0AB0	8 AO	7789229xxx	1	A2508	1				
AI/AO	6ES7334-0CE01-0AA0	4 AI + 2 AO	7789225xxx	1	A3716	1				
	6ES7334-0KE00-0AB0	4 AI + 2 AO	7789196xxx	1	A2508	1				
	6ES7335-7HG01-0AB0	4 AI + 2 AO	7789226xxx	1	A3716	1				
	6ES7335-7HG02-0AB0	4 AI + 2 AO	7789226xxx	1	A3716	1				
CPU	6ES7312-5BD00-0AB0	10 DI	1431530xxx	1	H2012	1				
		6 DO			H2008	1			O2008	1
	6ES7312-5BD01-0AB0	10 DI	1431530xxx	1	H2012	1				
		6 DO			H2008	1			O2008	1
	6ES7312-5BE03-0AB0	10 DI	1431530xxx	1	H2012	1				
		6 DO			H2008	1			O2008	1
	6ES7312-5BF04-0AB0	10 DI	1431530xxx	1	H2012	1				
		8 DO			H2008	1				
	6ES7312-6EH04-0AB0	16 DI	7789222xxx	1	H2016	1	I2016	1		
		16 DO			H2016	1			O2016	1
		8 DI	7789223xxx	1	H2008	1				
		5 AI + 2 AO			A2508P	1				

PLC SIEMENS – S7-300 / ET- 200M

A

	PLC		Cables		Interfaces					
	Input/Output cards		Standard		Direct inputs/outputs		Insulated inputs		Insulated outputs	
					- see page A.37 (H,R) or A.55 (A) -		- see page A.61 -		- see page A.65 -	
	Manufacturer code	Number/Type of channels	Order No.	Quantity	Type	Quantity	Type	Quantity	Type	Quantity
CPU	6ES7313-5BE00-0AB0	16 DI	7789222xxx	1	H2016	1				
		16 DO			H2016	1			02016	1
		8 DI	7789223xxx	1	H2008	1				
		5 AI + 2 AO			A2508P	1				
	6ES7313-5BE01-0AB0	16 DI	7789222xxx	1	H2016	1	I2016	1		
		16 DO			H2016	1			02016	1
		8 DI	7789223xxx	1	H2008	1				
		5 AI + 2 AO			A2508P	1				
	6ES7313-5BF03-0AB0	16 DI	7789222xxx	1	H2016	1	I2016	1		
		16 DO			H2016	1			02016	1
		8 DI	7789223xxx	1	H2008	1				
		5 AI + 2 AO			A2508P	1				
	6ES7313-5BG04-0AB0	16 DI	7789222xxx	1	H2016	1	I2016	1		
		16 DO			H2016	1			02016	1
		8 DI	7789223xxx	1	H2008	1				
		5 AI + 2 AO			A2508P	1				
	6ES7313-6BE00-0AB0	16 DI	7789222xxx	1	H2016	1	I2016	1		
		16 DO			H2016	1			02016	1
	6ES7313-6BE01-0AB0	16 DI	7789222xxx	1	H2016	1	I2016	1		
		16 DO			H2016	1			02016	1
	6ES7313-6BF03-0AB0	16 DI	7789222xxx	1	H2016	1	I2016	1		
		16 DO			H2016	1			02016	1
	6ES7313-6CE00-0AB0	16 DI	7789222xxx	1	H2016	1	I2016	1		
		16 DO			H2016	1			02016	1
	6ES7313-6CE01-0AB0	16 DI	7789222xxx	1	H2016	1	I2016	1		
		16 DO			H2016	1			02016	1
	6ES7313-6CF03-0AB0	16 DI	7789222xxx	1	H2016	1	I2016	1		
		16 DO			H2016	1			02016	1
	6ES7314-6BF00-0AB0	16 DI	7789222xxx	1	H2016	1	I2016	1		
		16 DO			H2016	1			02016	1
		8 DI	7789223xxx	1	H2008	1				
		5 AI + 2 AO			A2508P	1				
	6ES7314-6BF01-0AB0	16 DI	7789222xxx	1	H2016	1	I2016	1		
		16 DO			H2016	1			02016	1
		8 DI	7789223xxx	1	H2008	1				
		5 AI + 2 AO			A2508P	1				
	6ES7314-6BF02-0AB0	16 DI	7789222xxx	1	H2016	1	I2016	1		
		16 DO			H2016	1			02016	1
		8 DI	7789223xxx	1	H2008	1				
		5 AI + 2 AO			A2508P	1				
	6ES7314-6CF00-0AB0	16 DI	7789222xxx	1	H2016	1	I2016	1		
		16 DO			H2016	1			02016	1
		8 DI	7789223xxx	1	H2008	1				
		5 AI + 2 AO			A2508P	1				
	6ES7314-6CF01-0AB0	16 DI	7789222xxx	1	H2016	1	I2016	1		
		16 DO			H2016	1			02016	1
		8 DI	7789223xxx	1	H2008	1				
		5 AI + 2 AO			A2508P	1				
	6ES7314-6CF02-0AB0	16 DI	7789222xxx	1	H2016	1	I2016	1		
		16 DO			H2016	1			02016	1
		8 DI	7789223xxx	1	H2008	1				
		5 AI + 2 AO			A2508P	1				
	6ES7314-6CH04-0AB0	16 DI	7789222xxx	1	H2016	1	I2016	1		
		16 DO			H2016	1			02016	1
		8 DI	7789223xxx	1	H2008	1				
		5 AI + 2 AO			A2508P	1				

Note

A) Attention! Use only interfaces without LEDs for the direct option.
 B) This is not an ATEX solution. The interface cannot have LEDs, fuses, disconnectors or test points

- Please, always take into account the characteristics of the PLC card (voltage, current...) when selecting interfaces. In some cases, the card can work at higher voltages than those indicated in the interface.
- The interfaces are intended to be used inside an IP20 enclosure at least.
- The last 3 digits of the cable code indicate its length in decimetres. For example, if the code ends in 100, the cable would be 10 m long.

* In the case that an input/output card does not appear in this table, you can check our on-line PLC selection guide at www.weidmuller.com where you will always find the most up-to-date information.

PLC SIEMENS – S7-400



	PLC		Cables		Interfaces					
	Input/Output cards		Standard		Direct inputs/outputs		Insulated inputs		Insulated outputs	
					- see page A.37 (H,R) or A.55 (A) -		- see page A.61 -		- see page A.65 -	
	Manufacturer code	Number/Type of channels	Order No.	Quantity	Type	Quantity	Type	Quantity	Type	Quantity
DI	6ES7421-1BL00-0AA0	32 DI	7789292xxx	1	H2016	2	I2016	2		
	6ES7421-1BL01-0AA0	32 DI	7789292xxx	1	H2016	2	I2016	2		
	6ES7421-1EL00-0AA0	32 DI	7789278xxx	1	R3632	1				
	6ES7421-1FH00-0AA0	16 DI	7789273xxx	1	R2416	1				
	6ES7421-1FH20-0AA0	16 DI	7789273xxx	1	R2416	1				
	6ES7421-7BH00-0AB0	16 DI	7789290xxx	1	H2016	2	I2016	2		
	6ES7421-7BH01-0AB0	16 DI	7789290xxx	1	H2016	2	I2016	2		
DO	6ES7421-7DH00-0AB0	16 DI	7789278xxx	1	R3632	1				
	6ES7422-1BH10-0AA0	16 DO	7789291xxx	1	H2016	1			O2016	1
	6ES7422-1BH11-0AA0	16 DO	7789291xxx	1	H2016	1			O2016	1
	6ES7422-1BL00-0AA0	32 DO	7789292xxx	1	H2016	2			O2016	2
	6ES7422-1FF00-0AA0	8 DO	7789283xxx	1	R1208	1				
	6ES7422-1FH00-0AA0	16 DO	7789273xxx	1	R2416	1				
	6ES7422-1HH00-0AA0	16 DO	7789270xxx	1	R3632	1				
AI	6ES7422-5EH10-0AB0	16 DO	7789291xxx	1	H2016	1			O2016	1
	6ES7422-7BL00-0AB0	32 DO	7789292xxx	1	H2016	2			O2016	2
	6ES7431-0HH00-0AB0	16 AI	7789284xxx	1	A3716	1				
	6ES7431-1KF00-0AB0	8 AI, voltage and resistance applications	2062360xxx	1	A2508	1				
	6ES7431-1KF00-0AB0	8 AI, current applications	2062380xxx	1	A2508	1				
	6ES7431-1KF10-0AB0	8 AI	7789285xxx	1	A2508	1				
	6ES7431-1KF20-0AB0	8 AI	7789285xxx	1	A2508	1				
AO	6ES7431-7KF10-0AB0	16 AI	7789284xxx	1	A3716	1				
	6ES7431-7QH00-0AB0	16 AI	7789284xxx	1	A3716	1				
	6ES7432-1HF00-0AB0	8 AO, common mode voltage applications	7789288xxx	1	A2508	1				
Note										

- Please, always take into account the characteristics of the PLC card (voltage, current...) when selecting interfaces. In some cases, the card can work at higher voltages than those indicated in the interface.
- The interfaces are intended to be used inside an IP20 enclosure at least.
- The last 3 digits of the cable code indicate its length in decimetres. For example, if the code ends in 100, the cable would be 10 m long.
- * In the case that an input/output card does not appear in this table, you can check our on-line PLC selection guide at www.weidmueller.com where you will always find the most up-to-date information.

PLC SIEMENS – S7-1200



	PLC		Cables		Interfaces					
	Input/Output cards		Standard		Direct inputs/outputs		Insulated inputs		Insulated outputs	
					- see page A.37 (H,R) or A.55 (A) -		- see page A.61 -		- see page A.65 -	
	Manufacturer code	Number/Type of channels	Order No.	Quantity	Type	Quantity	Type	Quantity	Type	Quantity
DI	6ES7221-1BF30-0XB0	8 DI	1329110xxx	1	H2008	1				
	6ES7221-1BF32-0XB0	8 DI	1329110xxx	1	H2008	1				
	6ES7221-1BH30-0XB0	16 DI	1329120xxx	1	H2016	1	I2016	1		
	6ES7221-1BH32-0XB0	16 DI	1329120xxx	1	H2016	1	I2016	1		
DO	6ES7222-1HF30-0XB0	8 DO	1329130xxx	1	R1208	1				
	6ES7222-1HH30-0XB0	16 DO	1329140xxx	1	R2416	1				
	6ES7222-1BF30-0XB0	8 DO	1329150xxx	1	H2008	1			O2008	1
	6ES7222-1BH30-0XB0	16 DO	1329170xxx	1	H2016	1			O2016	1
DI/DO	6ES7222-1BH32-0XB0	16 DO	1329170xxx	1	H2016	1			O2016	1
	6ES7223-1PH30-0XB0	8 DI	1329180xxx	1	H2008	1				
	6ES7223-1PL30-0XB0	8 DO	1329190xxx	1	R1208	1				
		16 DI	1329200xxx	1	H2016	1				
		16 DO	1329210xxx	1	R2416	1				
	6ES7223-1BH30-0XB0	8 DI	1329180xxx	1	H2008	1				
		8 DO	1329230xxx	1	H2008	1			O2008	1
	6ES7223-1BL30-0XB0	16 DI	1329200xxx	1	H2016	1				
		16 DO	1329240xxx	1	H2016	1			O2016	1
AI	6ES7231-4HD30-0XB0	4 AI	1329250xxx	1	A1504	1				
	6ES7231-4HD32-0XB0	4 AI	1329250xxx	1	A1504	1				
	6ES7231-4HF30-0XB0	8 AI	1329270xxx	1	A2508	1				
	6ES7232-4HB30-0XB0	2 AO	1329280xxx	1	A1504	1				
AO	6ES7232-4HB30-0XB0	2 AO	1329280xxx	1	A1504	1				
	6ES7232-4HD30-0XB0	4 AO	1329290xxx	1	A1504	1				
AI/AO	6ES7234-4HE30-0XB0	4 AI + 2 AO	1329300xxx	1	A2508	1				
Note										

- Please, always take into account the characteristics of the PLC card (voltage, current...) when selecting interfaces. In some cases, the card can work at higher voltages than those indicated in the interface.
 - Cables 7789100xxx, 7789104xxx, 7789106xxx, 7789108xxx, 1350480xxx, 1350490xxx and 1350500xxx have wire-end ferrules at one end. These cables do not have a PLC connector. Colour code according to DIN 47100.
 - The interfaces are intended to be used inside an IP20 enclosure at least.
 - The last 3 digits of the cable code indicate its length in decimetres. For example, if the code ends in 100, the cable would be 10 m long.
- * In the case that an input/output card does not appear in this table, you can check our on-line PLC selection guide at www.weidmueller.com where you will always find the most up-to-date information.

PLC SIEMENS – S7-1500



	PLC		Cables		Interfaces					
	Input/Output cards		Standard		Direct inputs/outputs		Insulated inputs		Insulated outputs	
					- see page A.37 (H/R) or A.55 (A) -		- see page A.61 -		- see page A.65 -	
	Manufacturer code	Number/Type of channels	Order No.	Quantity	Type	Quantity	Type	Quantity	Type	Quantity
DI	6ES7521-1BH00-0AB0	16 DI	1462090xxx	1	H2016	1	I2016	1		
	6ES7521-1BH50-0AA0 ^{A)}	16 DI	1462100xxx	1	H2016	1				
	6ES7521-1BL00-0AB0	32 DI	1462040xxx	1	H2016	2	I2016	2		
	6ES7521-1BL10-0AA0	32 DI	1994500xxx	1	H2016	2				
	6ES7521-1FH00-0AA0	16 DI	1462130xxx	1	R2416	1				
DO	6ES7522-1BF00-0AB0	8 DO	1462110xxx	1	H2008	1			02008	1
	6ES7522-1BH00-0AB0	16 DO	1462090xxx	1	H2016	1			02016	1
	6ES7522-1BL00-0AB0	32 DO	1462040xxx	1	H2016	2			02016	2
	6ES7522-5FF00-0AB0	8 DO	1462140xxx	1	R2416	1				
AI	6ES7531-7KF00-0AB0	8 AI	1462200xxx	1	A3716	1				
	6ES7531-7NF10-0AB0	8 AI	1462200xxx	1	A3716	1				
AO	6ES7532-5HD00-0AB0	4 AO, 2-wire voltage applications	1462150xxx	1	A1504	1				
	6ES7532-5HD00-0AB0	4 AO, 4-wire voltage applications	1462170xxx	1	A2508	1				
	6ES7532-5HD00-0AB0	4 AO, current applications	1462160xxx	1	A1504	1				
	6ES7532-5HF00-0AB0	8 AO, 2-wire voltage applications	1991700xxx	1	A2508	1				
	6ES7532-5HF00-0AB0	8 AO, 4-wire voltage applications	1991720xxx	1	A3716	1				
	6ES7532-5HF00-0AB0	8 AO, current applications	1991710xxx	1	A2508	1				
Note A) Attention! Only use interfaces without LEDs B) Attention! Only use Interfaces without disconnectors and test points										

- Please, always take into account the characteristics of the PLC card (voltage, current,...) when selecting interfaces. In some cases, the card can work at higher voltages than those indicated in the interface.
- The interfaces are intended to be used inside an IP20 enclosure at least.
- The last 3 digits of the cable code indicate its length in decimetres. For example, if the code ends in 100, the cable would be 10 m long.
- * In the case that an input/output card does not appear in this table, you can check our on-line PLC selection guide at www.weidmueller.com where you will always find the most up-to-date information.

RS IO – Selection guide for passive interfaces for digital signals

Type			Features					Interfaces		
Number of channels	Family	Type of wiring	Connection		LED by channel	Disconnectable	Fuse	Order No.	Type	Page
			Screw	Tension clamp connection						
Universal	H20	1:1						0224261001	RS F20 LP2N 5/20	D.6
		1:1						8537110000	RS F20 Z	D.6
	H40	1:1						0224461001	RS F40 LP2N 5/40	D.6
		1:1						8537140000	RS F40 Z	D.6
8-channel	H2008	2-wire						9445530000	RS 8IO 2W L H S	A.38
	R1208	2-wire						9441540000	RS 8IO 2W R S	A.39
12-channel	H2012	2-wire						9445630000	RS 12IO 2W L H S	A.40
16-channel	H2016	1-wire						9445700000	RS 16IO 1W H S	A.41
								9445710000	RS 16IO 1W L H S	A.41
								1311750000	RS 16IO 1W H Z	A.41
								1311770000	RS 16IO 1W L H Z	A.41
								9445810000	RS 16IO 1W L L H S	A.42
								1311780000	RS 16IO 1W L L H Z	A.42
		2-wire						9445720000	RS 16IO 2W H S	A.43
								9445730000	RS 16IO 2W L H S	A.43
								1311790000	RS 16IO 2W H Z	A.43
								1311800000	RS 16IO 2W L H Z	A.43
								1311810000	RS 16IO 2W I H S	A.44
								9445750000	RS 16IO 2W L L H S	A.44
								1311820000	RS 16IO 2W I H Z	A.44
								1311830000	RS 16IO 2W L L H Z	A.44
								1431700000	RS 16IO 2W L L 2H S	A.45
								9445820000	RS 16IO 2W F H S	A.46
								1311850000	RS 16IO 2W F L H S	A.46
								1311840000	RS 16IO 2W F H Z	A.46
								1311870000	RS 16IO 2W F L H Z	A.46
		3-wire						9445760000	RS 16IO 3W H S	A.47
								9445770000	RS 16IO 3W L H S	A.47
								1311880000	RS 16IO 3W H Z	A.47
								1311890000	RS 16IO 3W L H Z	A.47
	R2416	1-wire						9441500000	RS 16IO 1W R S	A.48
								9441860000	RS 16IO 1W I R S	A.48
		2-wire						9441700000	RS 16IO 2W R S	A.49
								9441560000	RS 16IO 2W F R S	A.49
		3-wire						9441600000	RS 16IO 3W I R S	A.50
32-channel	R3632	1-wire						9441510000	RS 32IO 1W R S	A.51
								9441870000	RS 32IO 1W I R S	A.51
		2-wire						9441710000	RS 32IO 2W R S	A.52
								9441570000	RS 32IO 2W F R S	A.52
		3-wire						9441610000	RS 32IO 3W I R S	A.53
Note 1:	Coding of the interface descriptions			RS	8IO: 8 inputs/outputs 12IO: 12 inputs/outputs 16IO: 16 inputs/outputs 32IO: 32 inputs/outputs	1W: 1-wire 2W: 2-wire 3W: 3-wire Number of wires	(empty): Direct I: Switch L: LED F: Fuse I L: Switch + LED F L: Fuse + LED	H HE connector (ribbon cable) R: RSV connector	S: Screw Z: Tension clamp connection	

RS IO - Passive interface for digital signals


RS IO - Interface for 8 digital signals 2-wire H (HE connector) system

Digital input/output passive interface

- 1, 2 or 3 wires
- With LED indicator (optional)
- With fuse or disconnection per channel (optional)
- Fuse powered protection
- Screw or tension clamp connection

RS 8IO 2W L H

H system, 2 wires with LED

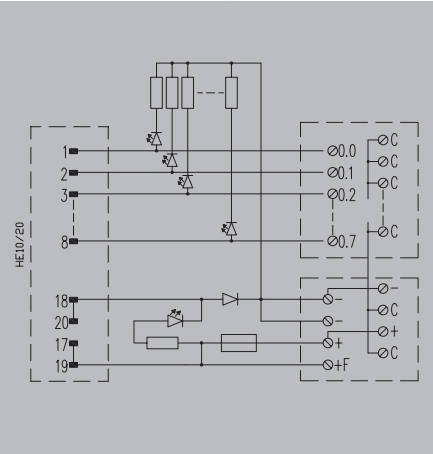

Technical data

Connection data and functionality
Connection on control side
Number of poles (control side)
LED status display per channel
LED status of the supply voltage
Fuse per channel
Power supply fuse
Type of test point
Rated data
Operating voltage
Max. current per channel
Operating voltage (supply)
Operating current (supply)
General data
Ambient temperature (operational)
Storage temperature
Approvals
Insulation coordination (EN 50178)
Rated insulation voltage
Surge voltage category
Pollution severity level
Pulse voltage test (1,2/50µs)
Dimensions
Clamping range, min./max. (field)
Clamping range, min./max. (supply)
Mounting rail
Length x width
Note

Connector according IEC60603-13/DIN41651
20-pole plug
green
yellow
No
3.15 A
No
24 V DC ± 10%
1 A
24 V DC ± 10%
2 A
-25...50°C
-40...60 °C
CE; EAC
< 50 V AC
III
2
0.8 kV
Screw connection
0.13 mm² / 6 mm²
0.13 mm² / 6 mm²
TS 32, TS 35
74 mm / 87 mm
The common C may carry up to 3 A if the external jumpers are not used

Ordering data

Screw connection with LED

Type	Height	Order No.
RS 8IO 2W L H S	72 mm	9445530000

Note

Accessories

Note

Note

Note


RS IO - Interface**for 8 digital signals 2-wire R system**

Digital input/output passive interface

- 1, 2 or 3 wires
- With LED indicator (optional)
- With fuse or disconnection per channel (optional)
- Fuse powered protection
- Screw or tension clamp connection

RS 8IO 2W R

R system, 2 wires

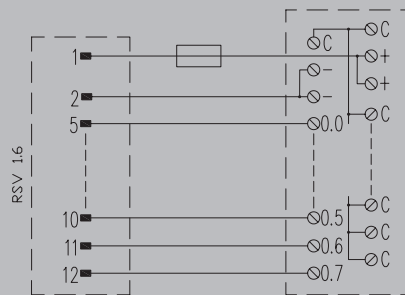**Technical data****Connection data and functionality**

Connection on control side
 Number of poles (control side)
 LED status display per channel
 LED status of the supply voltage
 Fuse per channel
 Power supply fuse
 Type of test point

Connector RSV 1.6
 12-pole socket
 No
 No
 No
 3.15 A
 No

Rated data

Operating voltage
 Max. current per channel
 Operating voltage (supply)
 Operating current (supply)

250 V UC
 1 A
 250 V UC
 3 A

General data

Ambient temperature (operational)
 Storage temperature
 Approvals

-25...50°C
 -40...60 °C
 CE, EAC

Insulation coordination (EN 50178)

Rated insulation voltage
 Surge voltage category
 Pollution severity level
 Pulse voltage test (1,2/50µs)

< 250 V AC
 II
 2
 2.1 kV

Dimensions

Clamping range, min./max. (field)
 Clamping range, min./max. (supply)
 Mounting rail
 Length x width

Screw connection

0.13 mm² / 6 mm²
 0.13 mm² / 6 mm²
 TS 32, TS 35
 68 mm / 87 mm

Note

The common C may carry up to 3 A if the external jumpers are not used

Ordering data

Screw connection without LED

Type	Height	Order No.
RS 8IO 2W R S	72 mm	9441540000

Note**Accessories****Note**


RS IO - Passive interface for digital signals

RS I/O - Interface for 12 digital signals 2-wire H system

- Digital input/output passive interface
- 1, 2 or 3 wires
 - With LED indicator (optional)
 - With fuse or disconnection per channel (optional)
 - Fuse powered protection
 - Screw or tension clamp connection

RS 12IO 2W L H

H system, 2 wires with LED

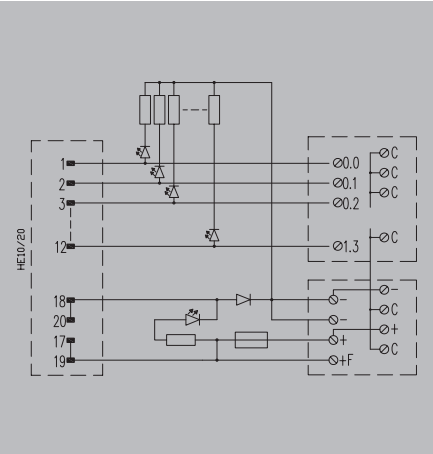

Technical data

Connection data and functionality
Connection on control side
Number of poles (control side)
LED status display per channel
LED status of the supply voltage
Fuse per channel
Power supply fuse
Type of test point
Rated data
Operating voltage
Max. current per channel
Operating voltage (supply)
Operating current (supply)
General data
Ambient temperature (operational)
Storage temperature
Approvals
Insulation coordination (EN 50178)
Rated insulation voltage
Surge voltage category
Pollution severity level
Pulse voltage test (1,2/50µs)
Dimensions
Clamping range, min./max. (field)
Clamping range, min./max. (supply)
Mounting rail
Length x width
Note

Connector according IEC60603-13/DIN41651
20-pole plug
green
yellow
No
3.15 A
No
24 V DC ± 10%
1 A
24 V DC ± 10%
2 A
-25...50°C
-40...60 °C
CE; EAC
< 50 V AC
III
2
0.8 kV
Screw connection
0.13 mm² / 6 mm²
0.13 mm² / 6 mm²
TS 32, TS 35
95 mm / 87 mm
The common C may carry up to 3 A if the external jumpers are not used

Ordering data

Screw connection with LED

Type	Height	Order No.
RS 12IO 2W L H S	72 mm	9445630000

Note

Accessories

Note

Note

Note


RS IO - Interface**for 16 digital signals 1-wire H system**

Digital input/output passive interface


- 1, 2 or 3 wires
- With LED indicator (optional)
- With fuse or disconnection per channel (optional)
- Fuse powered protection
- Screw or tension clamp connection

RS 16IO 1W H

H system, 1 wire

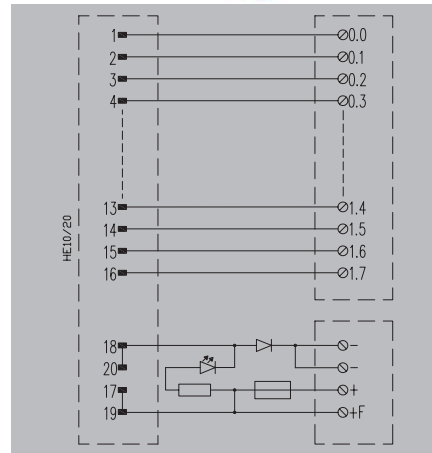**RS 16IO 1W L H**

H system, 1 wire with LED

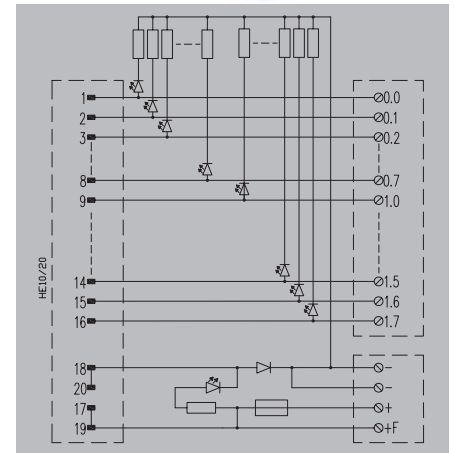**Technical data**

Connection data and functionality	
Connection on control side	
Number of poles (control side)	
LED status display per channel	
LED status of the supply voltage	
Fuse per channel	
Power supply fuse	
Type of test point	
Rated data	
Operating voltage	
Max. current per channel	
Operating voltage (supply)	
Operating current (supply)	
General data	
Ambient temperature (operational)	
Storage temperature	
Approvals	
Insulation coordination (EN 50178)	
Rated insulation voltage	
Surge voltage category	
Pollution severity level	
Pulse voltage test (1,2/50µs)	
Dimensions	
Clamping range, min./max. (field)	
Clamping range, min./max. (supply)	
Mounting rail	
Length x width	
Note	

Ordering data

Type	Height	Order No.
RS 16IO 1W H S	72 mm	9445700000
RS 16IO 1W H Z	72 mm	1311750000
Note		

Accessories

Note

Connector according IEC60603-13/DIN41651	
20-pole plug	
No	
yellow	
No	
3.15 A	
No	
Screw connection	
0.13 mm ² / 6 mm ²	0.13 mm ² / 2.5 mm ²
0.13 mm ² / 6 mm ²	0.13 mm ² / 2.5 mm ²
TS 32, TS 35	TS 32, TS 35
46 mm / 87 mm	46 mm / 87 mm
Tension-clamp connection	
0.13 mm ² / 6 mm ²	0.13 mm ² / 2.5 mm ²
0.13 mm ² / 6 mm ²	0.13 mm ² / 2.5 mm ²
TS 32, TS 35	TS 32, TS 35
46 mm / 87 mm	46 mm / 87 mm
Note	

Type	Height	Order No.
RS 16IO 1W H S	72 mm	9445700000
RS 16IO 1W H Z	72 mm	1311750000
Note		

Connector according IEC60603-13/DIN41651	
20-pole plug	
green	
yellow	
No	
3.15 A	
No	
Screw connection	
0.13 mm ² / 6 mm ²	0.13 mm ² / 2.5 mm ²
0.13 mm ² / 6 mm ²	0.13 mm ² / 2.5 mm ²
TS 32, TS 35	TS 32, TS 35
46 mm / 87 mm	46 mm / 87 mm
Tension-clamp connection	
0.13 mm ² / 6 mm ²	0.13 mm ² / 2.5 mm ²
0.13 mm ² / 6 mm ²	0.13 mm ² / 2.5 mm ²
TS 32, TS 35	TS 32, TS 35
46 mm / 87 mm	46 mm / 87 mm
Note	

Type	Height	Order No.
RS 16IO 1W L H S	72 mm	9445710000
RS 16IO 1W L H Z	72 mm	1311770000
Note		

Note

RS IO - Passive interface for digital signals


RS IO - Interface for 16 digital signals 1-wire H system

Digital input/output passive interface

- 1, 2 or 3 wires
- With LED indicator (optional)
- With fuse or disconnection per channel (optional)
- Fuse powered protection
- Screw or tension clamp connection

RS 16IO 1W I-L H

H system, 1 wire with LED and disconnection per channel

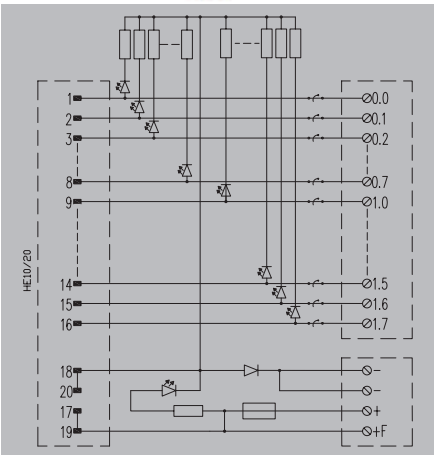

Technical data

Connection data and functionality
Connection on control side
Number of poles (control side)
LED status display per channel
LED status of the supply voltage
Fuse per channel
Power supply fuse
Type of test point
Rated data
Operating voltage
Max. current per channel
Operating voltage (supply)
Operating current (supply)
General data
Ambient temperature (operational)
Storage temperature
Approvals
Insulation coordination (EN 50178)
Rated insulation voltage
Surge voltage category
Pollution severity level
Pulse voltage test (1,2/50µs)
Dimensions
Clamping range, min./max. (field)
Clamping range, min./max. (supply)
Mounting rail
Length x width
Note

Connector according IEC60603-13/DIN41651
20-pole plug
green
yellow
No
3.15 A
No
24 V DC ± 10%
1 A
24 V DC ± 10%
2 A
-25...50°C
-40...60 °C
CE; EAC
< 50 V AC
III
2
0.8 kV
Screw connection
0.13 mm ² / 6 mm ²
0.13 mm ² / 6 mm ²
TS 32, TS 35
110 mm / 87 mm
Tension-clamp connection
0.14 mm ² / 1.5 mm ²
0.14 mm ² / 1.5 mm ²
TS 32, TS 35
110 mm / 87 mm

Ordering data

Screw connection without LED
Screw connection with LED
Tension-clamp connection without LED
Tension-clamp connection with LED
Note

Type	Height	Order No.
RS 16IO 1W I-L H S	72 mm	9445810000
RS 16IO 1W I-L H Z	72 mm	1311780000

Accessories

Note

Note


RS IO - Interface**for 16 digital signals 2-wire H system**

Digital input/output passive interface


- 1, 2 or 3 wires
- With LED indicator (optional)
- With fuse or disconnection per channel (optional)
- Fuse powered protection
- Screw or tension clamp connection

RS 16IO 2W H

H system, 2 wires

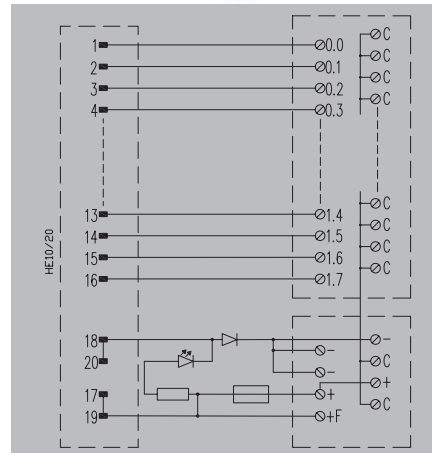**RS 16IO 2W L H**

H system, 2 wires with LED

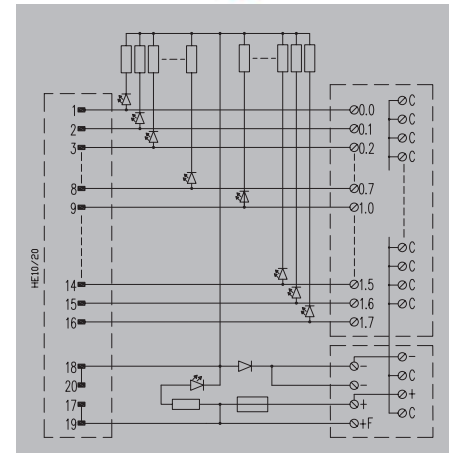**Technical data**

Connection data and functionality	
Connection on control side	
Number of poles (control side)	
LED status display per channel	
LED status of the supply voltage	
Fuse per channel	
Power supply fuse	
Type of test point	
Rated data	
Operating voltage	
Max. current per channel	
Operating voltage (supply)	
Operating current (supply)	
General data	
Ambient temperature (operational)	
Storage temperature	
Approvals	
Insulation coordination (EN 50178)	
Rated insulation voltage	
Surge voltage category	
Pollution severity level	
Pulse voltage test (1,2/50µs)	
Dimensions	
Clamping range, min./max. (field)	
Clamping range, min./max. (supply)	
Mounting rail	
Length x width	
Note	

Ordering data

Type	Height	Order No.
RS 16IO 2W H S	72 mm	9445720000
RS 16IO 2W H Z	72 mm	1311790000
Note		

Accessories

Note

Connector according IEC60603-13/DIN41651	
20-pole plug	
No	
yellow	
No	
3.15 A	
No	
Screw connection	
0.13 mm ² / 6 mm ²	0.13 mm ² / 2.5 mm ²
0.13 mm ² / 6 mm ²	0.13 mm ² / 2.5 mm ²
TS 32, TS 35	TS 32, TS 35
87 mm / 87 mm	87 mm / 87 mm
Tension-clamp connection	
0.13 mm ² / 6 mm ²	0.13 mm ² / 2.5 mm ²
0.13 mm ² / 6 mm ²	0.13 mm ² / 2.5 mm ²
TS 32, TS 35	TS 32, TS 35
87 mm / 87 mm	87 mm / 87 mm
Note	
The common C may carry up to 3 A if the external jumpers are not used	

Type	Height	Order No.
RS 16IO 2W H S	72 mm	9445720000
RS 16IO 2W H Z	72 mm	1311790000
Note		

Connector according IEC60603-13/DIN41651	
20-pole plug	
green	
yellow	
No	
3.15 A	
No	
Screw connection	
0.13 mm ² / 6 mm ²	0.13 mm ² / 2.5 mm ²
0.13 mm ² / 6 mm ²	0.13 mm ² / 2.5 mm ²
TS 32, TS 35	TS 32, TS 35
87 mm / 87 mm	87 mm / 87 mm
Tension-clamp connection	
0.13 mm ² / 6 mm ²	0.13 mm ² / 2.5 mm ²
0.13 mm ² / 6 mm ²	0.13 mm ² / 2.5 mm ²
TS 32, TS 35	TS 32, TS 35
87 mm / 87 mm	87 mm / 87 mm
Note	
The common C may carry up to 3 A if the external jumpers are not used	

Type	Height	Order No.
RS 16IO 2W L H S	72 mm	9445730000
RS 16IO 2W L H Z	72 mm	1311800000
Note		

Note


RS IO - Passive interface for digital signals

RS IO - Interface for 16 digital signals 2-wire H system

- Digital input/output passive interface
- 1, 2 or 3 wires
 - With LED indicator (optional)
 - With fuse or disconnection per channel (optional)
 - Fuse powered protection
 - Screw or tension clamp connection


RS 16IO 2W I H

H system, 2 wires with disconnection per channel

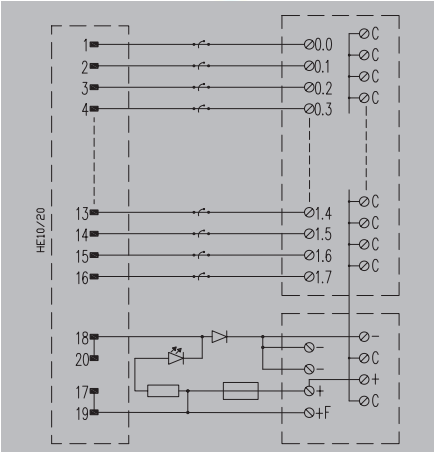

RS 16IO 2W I L H

H system, 2 wires with LED and disconnection per channel

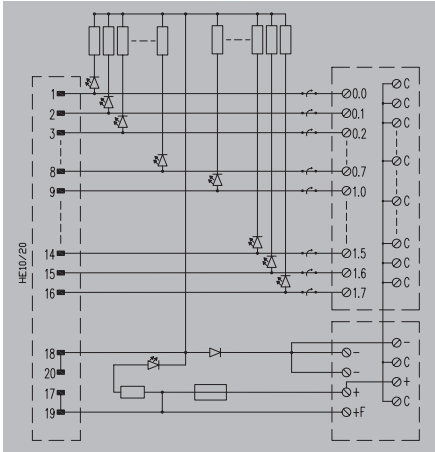

Technical data

Connection data and functionality	
Connection on control side	
Number of poles (control side)	
LED status display per channel	
LED status of the supply voltage	
Fuse per channel	
Power supply fuse	
Type of test point	
Rated data	
Operating voltage	
Max. current per channel	
Operating voltage (supply)	
Operating current (supply)	
General data	
Ambient temperature (operational)	
Storage temperature	
Approvals	
Insulation coordination (EN 50178)	
Rated insulation voltage	
Surge voltage category	
Pollution severity level	
Pulse voltage test (1,2/50µs)	
Dimensions	
Clamping range, min./max. (field)	
Clamping range, min./max. (supply)	
Mounting rail	
Length x width	
Note	

Connector according IEC60603-13/DIN41651	
20-pole plug	
No	
yellow	
No	
3.15 A	
No	
25 V AC / 50 V DC	
1 A	
24 V DC ± 10%	
2 A	
-25...50°C	
-40...60 °C	
CE; EAC	
< 50 V AC	
III	
2	
0.8 kV	
Screw connection	Tension-clamp connection
0.13 mm² / 6 mm²	0.13 mm² / 2.5 mm²
0.13 mm² / 6 mm²	0.13 mm² / 2.5 mm²
TS 32, TS 35	TS 32, TS 35
95 mm / 87 mm	95 mm / 87 mm
The common C may carry up to 3 A if the external jumpers are not used	

Connector according IEC60603-13/DIN41651	
20-pole plug	
green	
yellow	
No	
3.15 A	
No	
24 V DC ± 10%	
1 A	
24 V DC ± 10%	
2 A	
-25...50°C	
-40...60 °C	
CE; EAC	
< 50 V AC	
III	
2	
0.8 kV	
Screw connection	Tension-clamp connection
0.13 mm² / 6 mm²	0.13 mm² / 2.5 mm²
0.13 mm² / 6 mm²	0.13 mm² / 2.5 mm²
TS 32, TS 35	TS 32, TS 35
95 mm / 87 mm	95 mm / 87 mm
The common C may carry up to 3 A if the external jumpers are not used	

Ordering data

Type	Height	Order No.
RS 16IO 2W I H S	72 mm	1311810000
RS 16IO 2W I H Z	72 mm	1311820000
Note		

Type	Height	Order No.
RS 16IO 2W I H S	72 mm	1311810000
RS 16IO 2W I H Z	72 mm	1311820000
Note		

Type	Height	Order No.
RS 16IO 2W I L H S	72 mm	9445750000
RS 16IO 2W I L H Z	72 mm	1311830000
Note		

Accessories

Note

Note

Note


RS IO - Interface for 16 digital signals 2-wire H system

Digital input/output passive interface

- 1, 2 or 3 wires
- With LED indicator (optional)
- With fuse or disconnection per channel (optional)
- Fuse powered protection
- Screw or tension clamp connection

RS 16IO 2W I-L 2H S

2 ribbon connectors for redundancy

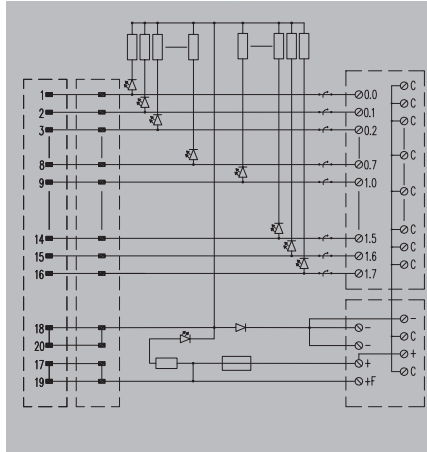

Technical data

Connection data and functionality

Connection on control side
Number of poles (control side)
LED status display per channel
LED status of the supply voltage
Fuse per channel
Power supply fuse
Type of test point

Rated data

Operating voltage
Max. current per channel
Operating voltage (supply)
Operating current (supply)

General data

Ambient temperature (operational)
Storage temperature
Approvals

Insulation coordination (EN 50178)

Rated insulation voltage
Surge voltage category
Pollution severity level
Pulse voltage test (1,2/50µs)

Dimensions

Clamping range, min./max. (field)
Clamping range, min./max. (supply)
Mounting rail
Length x width

Note

Connector according IEC60603-13/DIN41651

20-pole plug

green

yellow

No

3.15 A

No

24 V DC $\pm$ 10%

1 A

24 V DC $\pm$ 10%

2 A

-25...50°C

-40...60 °C

CE; EAC

< 50 V AC

III

2

0.8 kV

Screw connection

0.13 mm² / 6 mm²

0.13 mm² / 6 mm²

TS 32, TS 35

91 mm / 109 mm

Ordering data

Screw connection without LED

Screw connection with LED

Tension-clamp connection without LED

Tension-clamp connection with LED

Note

Accessories

Note

RS IO - Passive interface for digital signals


RS IO - Interface for 16 digital signals 2-wire H system

Digital input/output passive interface

- 1, 2 or 3 wires
- With LED indicator (optional)
- With fuse or disconnection per channel (optional)
- Fuse powered protection
- Screw or tension clamp connection


RS 16IO 2W F H

H system, 2 wires with fuse per channel

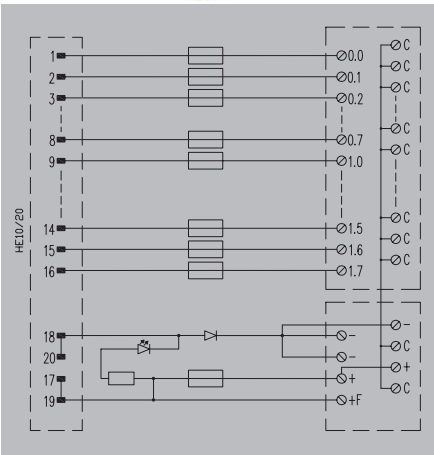

RS 16IO 2W F-L H

H system, 2 wires with LED and fuse per channel

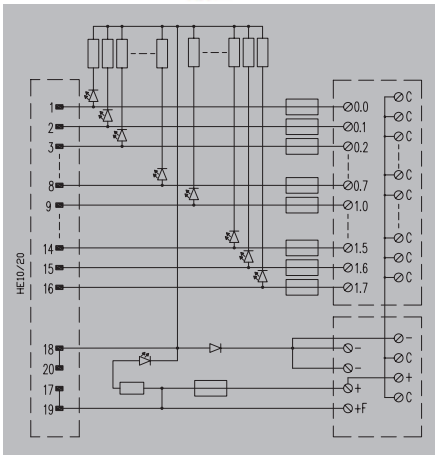

Technical data

Connection data and functionality
Connection on control side
Number of poles (control side)
LED status display per channel
LED status of the supply voltage
Fuse per channel
Power supply fuse
Type of test point
Rated data
Operating voltage
Max. current per channel
Operating voltage (supply)
Operating current (supply)
General data
Ambient temperature (operational)
Storage temperature
Approvals
Insulation coordination (EN 50178)
Rated insulation voltage
Surge voltage category
Pollution severity level
Pulse voltage test (1,2/50µs)
Dimensions
Clamping range, min./max. (field)
Clamping range, min./max. (supply)
Mounting rail
Length x width
Note

Connector according IEC60603-13/DIN41651
20-pole plug
No
yellow
500 mA
3.15 A
No
25 V AC / 50 V DC
1 A
24 V DC ± 10%
2 A
-25...50°C
-40...60 °C
CE; EAC
< 50 V AC
III
2
0.8 kV
Screw connection
0.13 mm ² / 6 mm ²
0.13 mm ² / 6 mm ²
TS 32, TS 35
122 mm / 87 mm
Tension-clamp connection
0.13 mm ² / 2.5 mm ²
0.13 mm ² / 2.5 mm ²
TS 32, TS 35
122 mm / 87 mm
The common C may carry up to 3 A if the external jumpers are not used

Connector according IEC60603-13/DIN41651
20-pole plug
green
yellow
500 mA
3.15 A
No
24 V DC ± 10%
1 A
24 V DC ± 10%
2 A
-25...50°C
-40...60 °C
CE; EAC
< 50 V AC
III
2
0.8 kV
Screw connection
0.13 mm ² / 6 mm ²
0.13 mm ² / 6 mm ²
TS 32, TS 35
122 mm / 87 mm
Tension-clamp connection
0.13 mm ² / 2.5 mm ²
0.13 mm ² / 2.5 mm ²
TS 32, TS 35
122 mm / 87 mm
The common C may carry up to 3 A if the external jumpers are not used

Ordering data

Type
Screw connection without LED
Screw connection with LED
Tension-clamp connection without LED
Tension-clamp connection with LED
Note

Type	Height	Order No.
RS 16IO 2W F H S	72 mm	9445820000
RS 16IO 2W F H Z	72 mm	1311840000

Type	Height	Order No.
RS 16IO 2W F-L H S	72 mm	1311850000
RS 16IO 2W F-L H Z	72 mm	1311870000

Accessories

Note

Note

Note


RS IO - Interface**for 16 digital signals 3-wire H system**

Digital input/output passive interface


- 1, 2 or 3 wires
- With LED indicator (optional)
- With fuse or disconnection per channel (optional)
- Fuse powered protection
- Screw or tension clamp connection

RS 16IO 3W H

H system, 3 wires

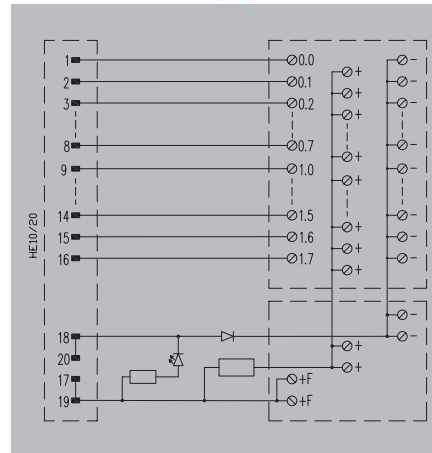**RS 16IO 3W L H**

H system, 3 wires with LED

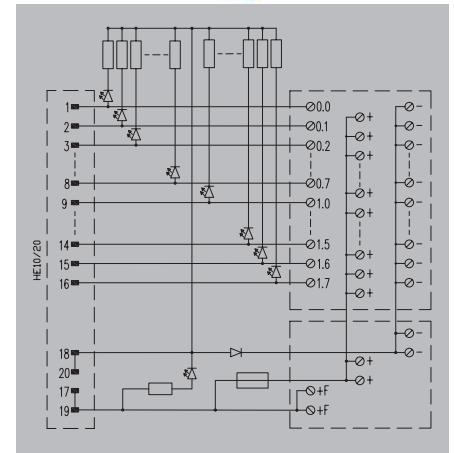**Technical data**

Connection data and functionality	
Connection on control side	
Number of poles (control side)	
LED status display per channel	
LED status of the supply voltage	
Fuse per channel	
Power supply fuse	
Type of test point	
Rated data	
Operating voltage	
Max. current per channel	
Operating voltage (supply)	
Operating current (supply)	
General data	
Ambient temperature (operational)	
Storage temperature	
Approvals	
Insulation coordination (EN 50178)	
Rated insulation voltage	
Surge voltage category	
Pollution severity level	
Pulse voltage test (1,2/50µs)	
Dimensions	
Clamping range, min./max. (field)	
Clamping range, min./max. (supply)	
Mounting rail	
Length x width	
Note	

Connector according IEC60603-13/DIN41651	
20-pole plug	
No	
yellow	
No	
3.15 A	
No	
25 V AC / 50 V DC	
1 A	
24 V DC ± 10%	
2 A	
-25...50°C	
-40...60 °C	
CE, EAC	
< 50 V AC	
III	
2	
0.8 kV	
Screw connection	Tension-clamp connection
0.13 mm ² / 6 mm ²	0.13 mm ² / 2.5 mm ²
0.13 mm ² / 6 mm ²	0.13 mm ² / 2.5 mm ²
TS 32, TS 35	TS 32, TS 35
90 mm / 87 mm	90 mm / 87 mm
The common C may carry up to 3 A if the external jumpers are not used	

Connector according IEC60603-13/DIN41651	
20-pole plug	
green	
yellow	
No	
3.15 A	
No	
24 V DC ± 10%	
1 A	
24 V DC ± 10%	
2 A	
-25...50°C	
-40...60 °C	
CE, EAC	
< 50 V AC	
III	
2	
0.8 kV	
Screw connection	Tension-clamp connection
0.13 mm ² / 6 mm ²	0.13 mm ² / 2.5 mm ²
0.13 mm ² / 6 mm ²	0.13 mm ² / 2.5 mm ²
TS 32, TS 35	TS 32, TS 35
90 mm / 87 mm	90 mm / 87 mm
The common C may carry up to 3 A if the external jumpers are not used	

Ordering data

Type	Height	Order No.
Screw connection without LED	72 mm	9445760000
Screw connection with LED	72 mm	1311880000
Tension-clamp connection without LED	72 mm	1311890000
Tension-clamp connection with LED	72 mm	1311890000
Note		

Type	Height	Order No.
RS 16IO 3W H S	72 mm	9445760000
RS 16IO 3W H Z	72 mm	1311880000
Note		

Type	Height	Order No.
RS 16IO 3W L H S	72 mm	9445770000
RS 16IO 3W L H Z	72 mm	1311890000
Note		

Accessories

Note

Note

Note


RS IO - Passive interface for digital signals

RS IO - Interface
for 16 digital signals 1-wire R system

- Digital input/output passive interface
- 1, 2 or 3 wires
 - With LED indicator (optional)
 - With fuse or disconnection per channel (optional)
 - Fuse powered protection
 - Screw or tension clamp connection



RS 16IO 1W R

R system, 1 wire

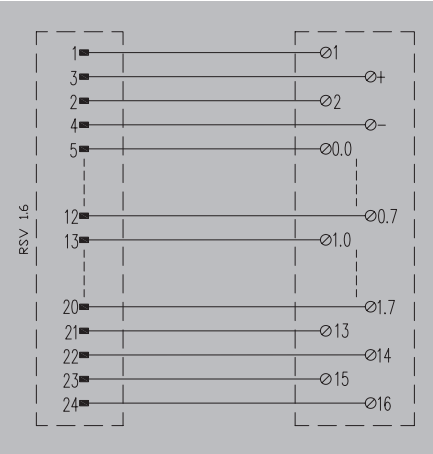

RS 16IO 1W I R

R system, 1 wire with disconnection per channel

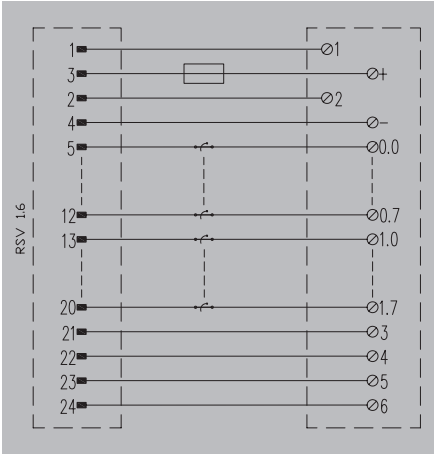

Technical data

Connection data and functionality	
Connection on control side	
Number of poles (control side)	
LED status display per channel	
LED status of the supply voltage	
Fuse per channel	
Power supply fuse	
Type of test point	
Rated data	
Operating voltage	
Max. current per channel	
Operating voltage (supply)	
Operating current (supply)	
General data	
Ambient temperature (operational)	
Storage temperature	
Approvals	
Insulation coordination (EN 50178)	
Rated insulation voltage	
Surge voltage category	
Pollution severity level	
Pulse voltage test (1,2/50µs)	
Dimensions	
Clamping range, min./max. (field)	
Clamping range, min./max. (supply)	
Mounting rail	
Length x width	
Note	

Connector RSV 1.6		
24-pole female		
No		
No		
No		
No		
No		
No		
150 V UC		
1 A		
24 V DC ± 10%		
3 A		
-25...50°C		
-40...60 °C		
CE; EAC		
< 150 V AC		
II		
2		
1.5 kV		
Screw connection		
0.13 mm² / 2.5 mm²		
0.13 mm² / 2.5 mm²		
TS 32, TS 35		
97 mm / 87 mm		

Connector RSV 1.6		
24-pole female		
No		
No		
No		
3.15 A		
No		
250 V UC		
1 A		
24 V DC ± 10%		
3 A		
-25...50°C		
-40...60 °C		
CE; EAC		
< 250 V AC		
II		
2		
2.1 kV		
Screw connection		
0.13 mm² / 6 mm²		
0.13 mm² / 6 mm²		
TS 32, TS 35		
127 mm / 87 mm		

Ordering data

Type	Height	Order No.
RS 16IO 1W R S	68 mm	9441500000

Note

Accessories

Note

Type	Height	Order No.
RS 16IO 1W R S	68 mm	9441500000

Note

Type	Height	Order No.
RS 16IO 1W I R S	72 mm	9441860000

Note

Note


RS IO - Interface**for 16 digital signals 2-wire R system**

Digital input/output passive interface



- 1, 2 or 3 wires
- With LED indicator (optional)
- With fuse or disconnection per channel (optional)
- Fuse powered protection
- Screw or tension clamp connection

RS 16IO 2W R

R system, 2 wires

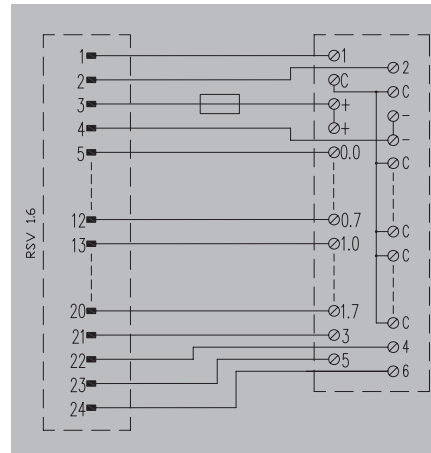**RS 16IO 2W F R**

R system, 2 wires with fuse per channel

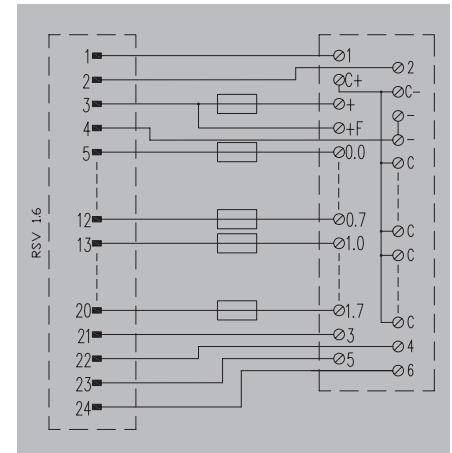**Technical data**

Connection data and functionality	
Connection on control side	
Number of poles (control side)	
LED status display per channel	
LED status of the supply voltage	
Fuse per channel	
Power supply fuse	
Type of test point	
Rated data	
Rated voltage (text)	
Max. current per channel	
Operating voltage (supply)	
Operating current (supply)	
General data	
Ambient temperature (operational)	
Storage temperature	
Approvals	
Insulation coordination (EN 50178)	
Rated insulation voltage	
Surge voltage category	
Pollution severity level	
Pulse voltage test (1,2/50µs)	
Dimensions	
Clamping range, min./max. (field)	
Clamping range, min./max. (supply)	
Mounting rail	
Length x width	
Note	

Connector RSV 1.6		
24-pole female		
No		
No		
No		
3.15 A		
No		
150 V UC		
1 A		
24 V DC ± 10%		
3 A		
-25...50°C		
-40...60 °C		
CE, EAC		
< 150 V AC		
II		
2		
1.5 kV		
Screw connection		
0.13 mm ² / 2.5 mm ²		
0.13 mm ² / 2.5 mm ²		
TS 32, TS 35		
123 mm / 87 mm		
The common C may carry up to 3 A if the external jumpers are not used		

Connector RSV 1.6		
24-pole female		
No		
No		
1 A		
3.15 A		
No		
150 V UC		
1 A		
24 V DC ± 10%		
3 A		
-25...50°C		
-40...60 °C		
CE, EAC		
< 150 V AC		
II		
2		
1.5 kV		
Screw connection		
0.13 mm ² / 2.5 mm ²		
0.13 mm ² / 2.5 mm ²		
TS 32, TS 35		
123 mm / 109 mm		
The common C may carry up to 3 A if the external jumpers are not used		

Ordering data

Screw connection without LED

Type	Height	Order No.
RS 16IO 2W R S	72 mm	9441700000

Type	Height	Order No.
RS 16IO 2W F R S	72 mm	9441560000

Note**Accessories****Note**


RS IO - Passive interface for digital signals

RS IO - Interface
for 16 digital signals 3-wire R system

- Digital input/output passive interface
- 1, 2 or 3 wires
 - With LED indicator (optional)
 - With fuse or disconnection per channel (optional)
 - Fuse powered protection
 - Screw or tension clamp connection

RS 16IO 3W I R

R system, 3 wires with disconnection per channel

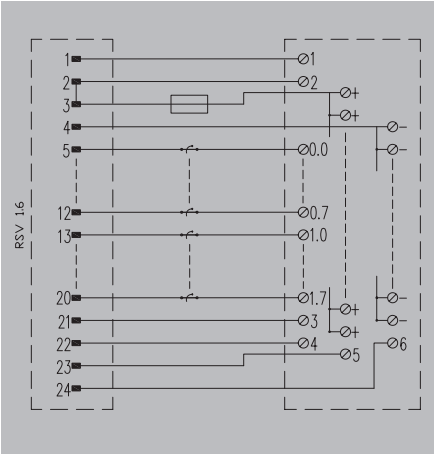

Technical data

Connection data and functionality
Connection on control side
Number of poles (control side)
LED status display per channel
LED status of the supply voltage
Fuse per channel
Power supply fuse
Type of test point
Rated data
Operating voltage
Max. current per channel
Operating voltage (supply)
Operating current (supply)
General data
Ambient temperature (operational)
Storage temperature
Approvals
Insulation coordination (EN 50178)
Rated insulation voltage
Surge voltage category
Pollution severity level
Pulse voltage test (1,2/50µs)
Dimensions
Clamping range, min./max. (field)
Clamping range, min./max. (supply)
Mounting rail
Length x width
Note

Connector RSV 1.6
24-pole female
No
No
No
3.15 A
No
150 V UC
1 A
24 V DC ± 10%
3 A
-25...50°C
-40...60 °C
CE; EAC
250 V AC
II
2
1.5 kV
Screw connection
0.13 mm² / 6 mm²
0.13 mm² / 6 mm²
TS 32, TS 35
116 mm / 109 mm
The common C may carry up to 3 A if the external jumpers are not used

Ordering data

Screw connection without LED

Type	Height	Order No.
RS 16IO 3W I R S	84 mm	9441600000

Note

Accessories

Note

Note

Note



RS IO - Interface**for 32 digital signals 1-wire R system**

Digital input/output passive interface


- 1, 2 or 3 wires
- With LED indicator (optional)
- With fuse or disconnection per channel (optional)
- Fuse powered protection
- Screw or tension clamp connection

RS 32IO 1W R

R system, 1 wire

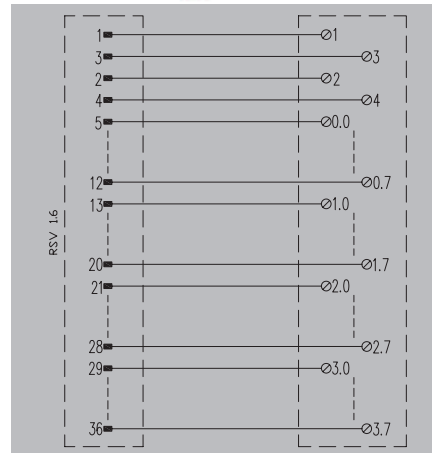**RS 32IO 1W I R**

R system, 1 wire with disconnection per channel

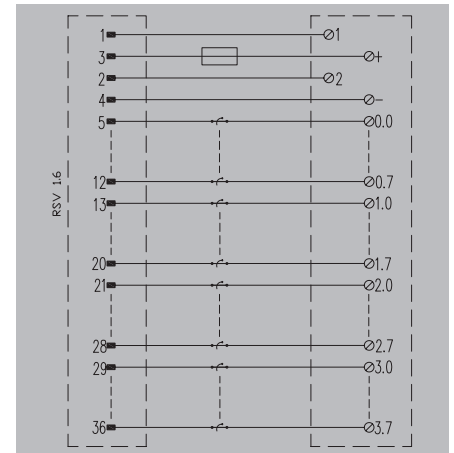**Technical data****Connection data and functionality**

Connection on control side
 Number of poles (control side)
 LED status display per channel
 LED status of the supply voltage
 Fuse per channel
 Power supply fuse
 Type of test point

Rated data

Operating voltage
 Max. current per channel
 Operating voltage (supply)
 Operating current (supply)

General data

Ambient temperature (operational)
 Storage temperature
 Approvals

Insulation coordination (EN 50178)

Rated insulation voltage
 Surge voltage category
 Pollution severity level
 Pulse voltage test (1,2/50µs)

Dimensions

Clamping range, min./max. (field)
 Clamping range, min./max. (supply)
 Mounting rail
 Length x width

Note

Connector RSV 1.6

36-pole female

No

No

No

No

No

150 V UC

1 A

24 V DC $\pm$ 10%

3 A

-25...50°C

-40...60 °C

CE; EAC

< 150 V AC

II

2

1.5 kV

Screw connection0.13 mm² / 2.5 mm²0.13 mm² / 2.5 mm²

TS 32, TS 35

148 mm / 87 mm

Connector RSV 1.6

36-pole female

No

No

No

3.15 A

No

250 V UC

1 A

24 V DC $\pm$ 10%

3 A

-25...50°C

-40...60 °C

CE; EAC

< 250 V AC

II

2

2.1 kV

Screw connection0.13 mm² / 6 mm²0.13 mm² / 6 mm²

TS 32, TS 35

188 mm / 87 mm

Ordering data

Screw connection without LED

Type	Height	Order No.
RS 32IO 1W R S	72 mm	9441510000

Type	Height	Order No.
RS 32IO 1W I R S	72 mm	9441870000

Note**Accessories****Note**

RS IO - Passive interface for digital signals

RS IO - Interface
for 32 digital signals 2-wire R system

- Digital input/output passive interface
- 1, 2 or 3 wires
 - With LED indicator (optional)
 - With fuse or disconnection per channel (optional)
 - Fuse powered protection
 - Screw or tension clamp connection



RS 32IO 2W R

R system, 2 wires



RS 32IO 2W F R

R system, 2 wires with fuse per channel

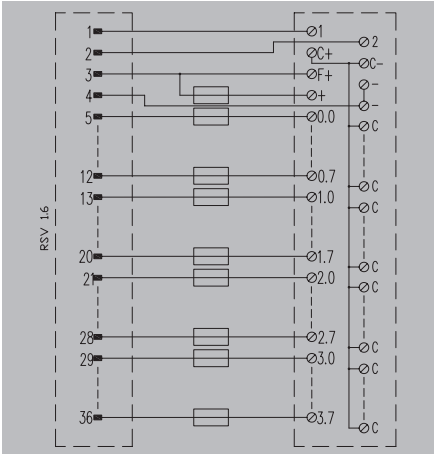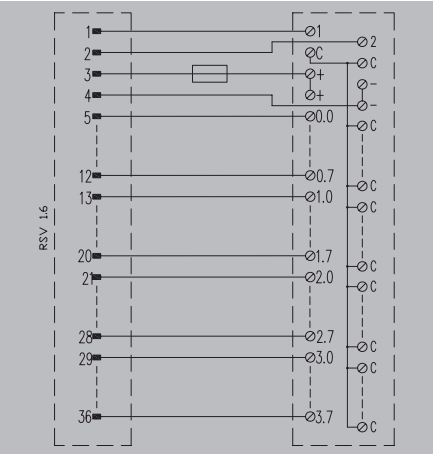

Technical data

Connection data and functionality	
Connection on control side	
Number of poles (control side)	
LED status display per channel	
LED status of the supply voltage	
Fuse per channel	
Power supply fuse	
Type of test point	
Rated data	
Operating voltage	
Max. current per channel	
Operating voltage (supply)	
Operating current (supply)	
General data	
Ambient temperature (operational)	
Storage temperature	
Approvals	
Insulation coordination (EN 50178)	
Rated insulation voltage	
Surge voltage category	
Pollution severity level	
Pulse voltage test (1,2/50µs)	
Dimensions	
Clamping range, min./max. (field)	
Clamping range, min./max. (supply)	
Mounting rail	
Length x width	
Note	

Connector RSV 1.6	
36-pole female	
No	
No	
No	
3.15 A	
No	
150 V UC	
1 A	
24 V DC ± 10%	
3 A	
-25...50°C	
-40...60 °C	
CE; EAC	
< 150 V AC	
II	
2	
1.5 kV	
Screw connection	
0.13 mm² / 2.5 mm²	
0.13 mm² / 2.5 mm²	
TS 32, TS 35	
200 mm / 87 mm	
The common C may carry up to 3 A if the external jumpers are not used	

Connector RSV 1.6	
36-pole female	
No	
No	
2 A	
3.15 A	
No	
150 V UC	
1 A	
24 V DC ± 10%	
3 A	
-25...50°C	
-40...60 °C	
CE; EAC	
< 150 V AC	
II	
2	
1.5 kV	
Screw connection	
0.13 mm² / 6 mm²	
0.13 mm² / 6 mm²	
TS 32, TS 35	
200 mm / 109 mm	
The common C may carry up to 3 A if the external jumpers are not used	

Ordering data

Type	Height	Order No.
RS 32IO 2W R S	72 mm	9441710000

Note

Accessories

Note

Type	Height	Order No.
RS 32IO 2W F R S	84 mm	9441570000

Note

Note


RS IO - Interface**for 32 digital signals 3-wire R system**

Digital input/output passive interface

- 1, 2 or 3 wires
- With LED indicator (optional)
- With fuse or disconnection per channel (optional)
- Fuse powered protection
- Screw or tension clamp connection

RS 32IO 3W I R

R system, 3 wires with disconnection per channel

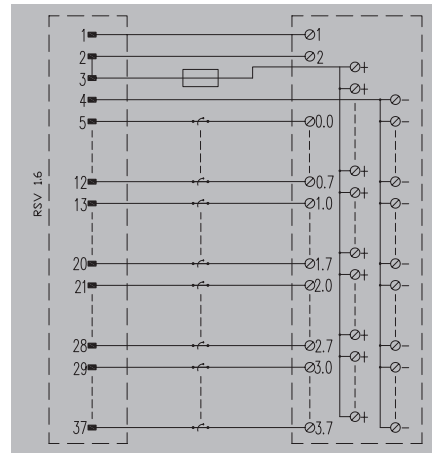**Technical data****Connection data and functionality**

Connection on control side
Number of poles (control side)
LED status display per channel
LED status of the supply voltage
Fuse per channel
Power supply fuse
Type of test point

Connector RSV 1.6
36-pole female
No
No
No
3.15 A
No

Rated data

Operating voltage
Max. current per channel
Operating voltage (supply)
Operating current (supply)

150 V UC
1 A
24 V DC $\pm$ 10%
3 A

General data

Ambient temperature (operational)
Storage temperature
Approvals

-25...50°C
-40...60 °C
CE, EAC

Insulation coordination (EN 50178)

Rated insulation voltage
Surge voltage category
Pollution severity level
Pulse voltage test (1,2/50μs)

< 150 V AC
II
2
1.5 kV

Dimensions

Clamping range, min./max. (field)
Clamping range, min./max. (supply)
Mounting rail
Length x width

Screw connection
0.13 mm² / 2.5 mm²
0.13 mm² / 2.5 mm²
TS 32, TS 35
188 mm / 109 mm

Note

The common C may carry up to 3 A if the external jumpers are not used

Ordering data

Screw connection without LED

Type	Height	Order No.
RS 32IO 3W I R S	84 mm	9441610000

Note**Accessories****Note**

RS A – Selection guide for passive interfaces for analogue signals

Type of Interface		Features					Interfaces		
Number of channels	Family	Connection		Common distribution	Disconnectable	Test points	Order No.	Type	Page
		Screw	Tension clamp connection						
Universal	A15						8005201001	RS SD15S UNC 4.40 LP2N	D.8
							8537390000	RS SD15 SZ	D.8
	A25						8005181001	RS SD25S UNC 4.40 LP2N	D.8
							8537370000	RS SD25 SZ	D.8
	A37						8003881001	RS SD37S UNC 4.40 LP2N	D.8
							8537240000	RS SD37 SZ	D.8
4-channels	A1504			TTTT			9448000000	RS 4AI0 DP SD S	A.56
				TTTT			1308230000	RS 4AI0 DP SD Z	A.56
				TTTT		!	9448100000	RS 4AI0 I-M-DP SD S	A.56
				TTTT		!	1308240000	RS 4AI0 I-M-DP SD Z	A.56
4-channels M	A1504M						1289090000	RS 4AI0 DP-M258 SD S	A.57
8-channel	A2508			TTTT			9448010000	RS 8AI0 DP SD S	A.58
				TTTT			1308250000	RS 8AI0 DP SD Z	A.58
				TTTT		!	9448110000	RS 8AI0 I-M-DP SD S	A.58
				TTTT		!	9449110000	RS 8AI0 I-M-DP SD Z	A.58
8-channel P	A2508P			TTTT			9448030000	RS 8AI PREM/APR SD S	A.59
8-channel M	A2508M						9448040000	RS 8AI1AO MICRO SD S	A.59
16-channel	A3716			TTTT			9448020000	RS 16AI0 DP SD S	A.60
				TTTT			1308270000	RS 16AI0 DP SD Z	A.60
				TTTT		!	9448120000	RS 16AI0 I-M-DP SD S	A.60
				TTTT		!	1308280000	RS 16AI0 I-M-DP SD Z	A.60
Note:	Coding of the interface descriptions RS 4AI0: 4 inputs/outputs 8AI0: 8 inputs/outputs 8AI: 8 inputs 8AI1AO: 8 inputs/1 outputs 16AI0: 16 inputs/outputs DP: Power distribution (empty) I-M: Switch + Test point M258: For Schneider M258 PREM/APR: For Schneider Premium MICRO: For Schneider Micro (empty) SD connector SUB-D S: Screw Z: Tension clamp connection								

RS A - Passive interface for analogue signals

RS A - Passive interface
for 4 analogue signals

- Analogue input/output passive interface:
- With test points or disconnection per channel (optional)
 - Screw or tension clamp connection



RS 4AI0 DP SD

4 channels



RS 4AI0 I-M-DP SD

4 channels, test points and disconnection per channel

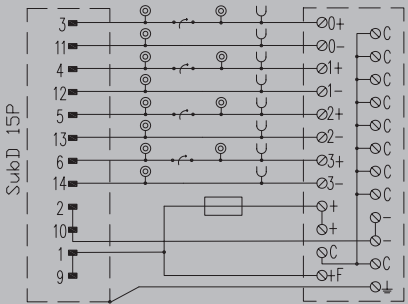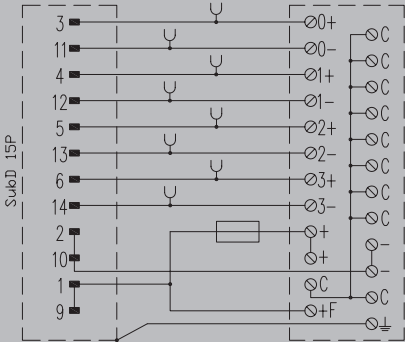

Technical data

Connection data and functionality	
Connection on control side	
Number of poles (control side)	
LED status display per channel	
LED status of the supply voltage	
Power supply fuse	
Type of test point	
Rated data	
Operating voltage	
Max. current per channel	
Operating voltage (supply)	
Operating current (supply)	
General data	
Ambient temperature (operational)	
Storage temperature	
Approvals	
Insulation coordination (EN 50178)	
Rated insulation voltage	
Surge voltage category	
Pollution severity level	
Pulse voltage test (1,2/50µs)	

D-sub connectors, acc. to IEC 60807 / DIN 41652	
15-pole plug	
No	
No	
3.15 A	
No	
≤ 25 V AC / 50 V DC	
0.5 A	
24 V DC ± 10%	
3 A	
-20...50°C	
-40...60 °C	
CE; EAC	
< 50 V AC	
III	
2	
0.8 kV	

D-sub connectors, acc. to IEC 60807 / DIN 41652	
15-pole plug	
No	
No	
3.15 A	
Diameter: 4 mm	
≤ 25 V AC / 50 V DC	
0.5 A	
24 V DC ± 10%	
3 A	
-20...50°C	
-40...60 °C	
CE; EAC	
< 50 V AC	
III	
2	
0.8 kV	

Dimensions
Clamping range, min./max. (field)
Clamping range, min./max. (supply)
Mounting rail
Length x width
Note

Screw connection	Tension clamp conn.
0.13 mm ² / 6 mm ²	0.13 mm ² / 2.5 mm ²
0.13 mm ² / 6 mm ²	0.13 mm ² / 2.5 mm ²
TS 32, TS 35	TS 32, TS 35
75 mm / 87 mm	75 mm / 87 mm
The common C may carry up to 3 A if the external jumpers are not used	

Screw connection	Tension clamp conn.
0.13 mm ² / 6 mm ²	0.13 mm ² / 2.5 mm ²
0.13 mm ² / 6 mm ²	0.13 mm ² / 2.5 mm ²
TS 32, TS 35	TS 32, TS 35
73 mm / 109 mm	73 mm / 109 mm
The common C may carry up to 3 A if the external jumpers are not used	

Ordering data

Type	Height	Order No.
RS 4AI0 DP SD S	72 mm	9448000000
RS 4AI0 DP SD Z	72 mm	1308230000

Type	Height	Order No.
RS 4AI0 DP SD S	72 mm	9448000000
RS 4AI0 DP SD Z	72 mm	1308230000

Type	Height	Order No.
RS 4AI0 I-M-DP SD S	81 mm	9448100000
RS 4AI0 I-M-DP SD Z	81 mm	1308240000

Note

Note

Note

Accessories

Note

Note


Note

RS A - Interface
for 4 analogue signals for Schneider M258

- Analogue input/output passive interface:
- With test points or disconnection per channel (optional)
 - Screw or tension clamp connection

RS 4AI0 DP-M258 SD

4 channels for M258 (Schneider), config. by voltage or current

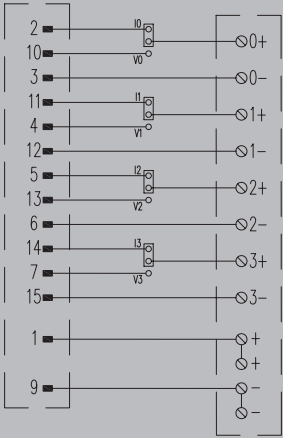

Technical data

Connection data and functionality	
Connection on control side	
Number of poles (control side)	
LED status display per channel	
LED status of the supply voltage	
Power supply fuse	
Type of test point	
Rated data	
Operating voltage	
Max. current per channel	
Operating voltage (supply)	
Operating current (supply)	
General data	
Ambient temperature (operational)	
Storage temperature	
Approvals	
Insulation coordination (EN 50178)	
Rated insulation voltage	
Surge voltage category	
Pollution severity level	
Pulse voltage test (1,2/50µs)	

D-sub connectors, acc. to IEC 60807 / DIN 41652
15-pole plug
No
No
No
No
≤ 25 V AC / 50 V DC
0.5 A
24 V DC ± 10%
3 A
-20...50°C
-40...60 °C
CE; EAC
< 50 V AC
III
2
0.8 kV

Dimensions
Clamping range, min./max. (field)
Clamping range, min./max. (supply)
Mounting rail
Length x width
Note

Screw connection
0.13 mm² / 6 mm²
0.13 mm² / 6 mm²
TS 32, TS 35
45 mm / 70 mm

Ordering data

Screw connection

Type	Height	Order No.
RS 4AI0 DP-M258 SD S	60 mm	1289090000

Note

Accessories

Note


RS A - Passive interface for analogue signals

RS A Interface
for 8 analogue signals

- Analogue input/output passive interface:
- With test points or disconnection per channel (optional)
 - Screw or tension clamp connection


RS 8AIO DP SD

8 channels

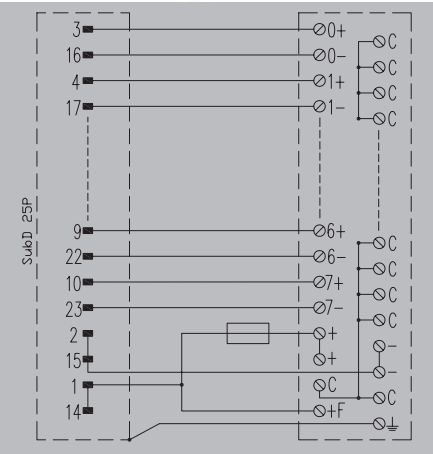

RS 8AIO I-M-DP SD

8 channels, test points and disconnection per channel

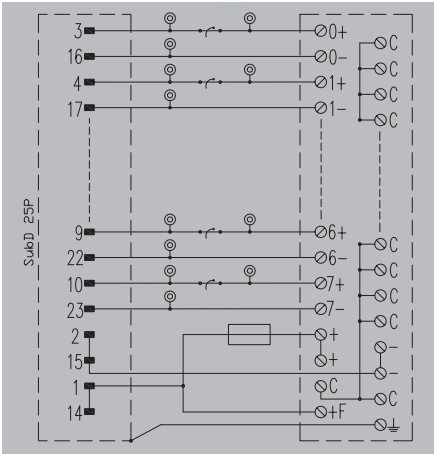

Technical data

Connection data and functionality	
Connection on control side	
Number of poles (control side)	
LED status display per channel	
LED status of the supply voltage	
Power supply fuse	
Type of test point	
Rated data	
Operating voltage	≤ 25 V AC / 50 V DC
Max. current per channel	0.5 A
Operating voltage (supply)	24 V DC ± 10%
Operating current (supply)	3 A
General data	
Ambient temperature (operational)	-20...50°C
Storage temperature	-40...60 °C
Approvals	CE; EAC
Insulation coordination (EN 50178)	
Rated insulation voltage	< 50 V AC
Surge voltage category	III
Pollution severity level	2
Pulse voltage test (1,2/50µs)	0.8 kV

Dimensions
Clamping range, min./max. (field)
Clamping range, min./max. (supply)
Mounting rail
Length x width
Note

Ordering data

	Screw connection
	Tension-clamp connection

Note

Accessories

Note

Connection data and functionality	
D-sub connectors, acc. to IEC 60807 / DIN 41652	
25-pole plug	
No	
No	
3.15 A	
No	
Rated data	
≤ 25 V AC / 50 V DC	
0.5 A	
24 V DC ± 10%	
3 A	
General data	
-20...50°C	
-40...60 °C	
CE; EAC	
Insulation coordination (EN 50178)	
< 50 V AC	
III	
2	
0.8 kV	

Screw connection	Tension-clamp connection
0.13 mm² / 6 mm²	0.13 mm² / 2.5 mm²
0.13 mm² / 6 mm²	0.13 mm² / 2.5 mm²
TS 32, TS 35	TS 32, TS 35
117 mm / 87 mm	117 mm / 87 mm
The common C may carry up to 3 A if the external jumpers are not used	

Type	Height	Order No.
RS 8AIO DP SD S	72 mm	9448010000
RS 8AIO DP SD Z	72 mm	1308250000

Note

Note

Connection data and functionality	
D-sub connectors, acc. to IEC 60807 / DIN 41652	
25-pole plug	
No	
No	
3.15 A	
Diameter: 4 mm	
Rated data	
≤ 25 V AC / 50 V DC	
0.5 A	
24 V DC ± 10%	
3 A	
General data	
-20...50°C	
-40...60 °C	
CE; EAC	
Insulation coordination (EN 50178)	
< 50 V AC	
III	
2	
0.8 kV	

Screw connection	Tension-clamp connection
0.13 mm² / 6 mm²	0.13 mm² / 2.5 mm²
0.13 mm² / 6 mm²	0.13 mm² / 2.5 mm²
TS 32, TS 35	TS 32, TS 35
114 mm / 109 mm	114 mm / 109 mm
The common C may carry up to 3 A if the external jumpers are not used	

Type	Height	Order No.
RS 8AIO I-M-DP SD S	81 mm	9448110000
RS 8AIO I-M-DP SD Z	81 mm	9449110000

Note


Note

RS A - Interface
for 8 and 9 analogue signals for Schneider
Micro/Premium

- Analogue input/output passive interface:
- With test points or disconnection per channel (optional)
 - Screw or tension clamp connection


RS 8AI PREM/APR SD

8 channels for Premium (Schneider) config. by volt. or current

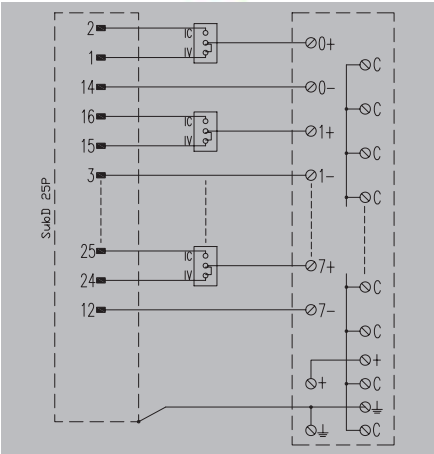

RS 8AI1AO MICRO SD

9 channels for Micro (Schneider)

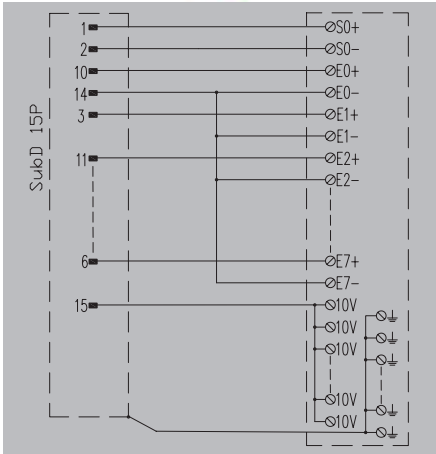

Technical data

Connection data and functionality	
Connection on control side	
Number of poles (control side)	
LED status display per channel	
LED status of the supply voltage	
Power supply fuse	
Type of test point	
Rated data	
Operating voltage	
Max. current per channel	
Operating voltage (supply)	
Operating current (supply)	
General data	
Ambient temperature (operational)	
Storage temperature	
Approvals	
Insulation coordination (EN 50178)	
Rated insulation voltage	
Surge voltage category	
Pollution severity level	
Pulse voltage test (1,2/50µs)	

Connection data and functionality	
D-sub connectors, acc. to IEC 60807 / DIN 41652	
25-pole plug	
No	
No	
No	
No	
No	
Rated data	
≤ 25 V AC / 50 V DC	
0.5 A	
24 V DC ± 10%	
3 A	
General data	
-20...50°C	
-40...60 °C	
CE; EAC	
Insulation coordination (EN 50178)	
< 50 V AC	
III	
2	
0.8 kV	

Connection data and functionality	
D-sub connectors, acc. to IEC 60807 / DIN 41652	
15-pole plug	
No	
No	
No	
No	
No	
Rated data	
≤ 25 V AC / 50 V DC	
0.5 A	
24 V DC ± 10%	
3 A	
General data	
-20...50°C	
-40...60 °C	
CE; EAC	
Insulation coordination (EN 50178)	
< 50 V AC	
III	
2	
0.8 kV	

Dimensions

Clamping range, min./max. (field)
Clamping range, min./max. (supply)
Mounting rail
Length x width

Note

Screw connection

0.13 mm ² / 6 mm ²
0.13 mm ² / 6 mm ²
TS 32, TS 35
116 mm / 87 mm

The common C may carry up to 3 A if the external jumpers are not used

Screw connection

0.13 mm ² / 6 mm ²
0.13 mm ² / 6 mm ²
TS 32, TS 35
100 mm / 87 mm

Ordering data

Screw connection

Type	Height	Order No.
RS 8AI PREM/APR SD S	72 mm	9448030000

Type	Height	Order No.
RS 8AI1AO MICRO SD S	72 mm	9448040000

Note

Accessories

Note

--

--

--

--


RS A - Passive interface for analogue signals

RS A Interface for 16 analogue signals

- Analogue input/output passive interface:
- With test points or disconnection per channel (optional)
 - Screw or tension clamp connection


RS 16AI0 DP SD

16 channels

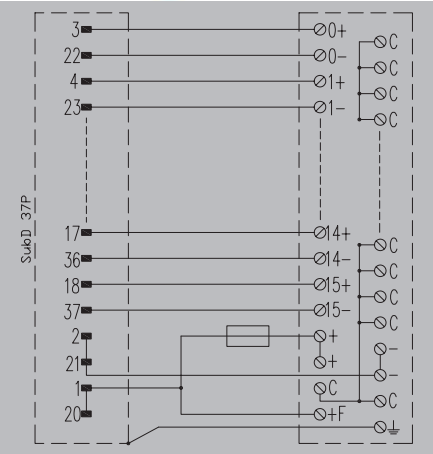

RS 16AI0 I-M-DP SD

16 channels, test points and disconnection per channel

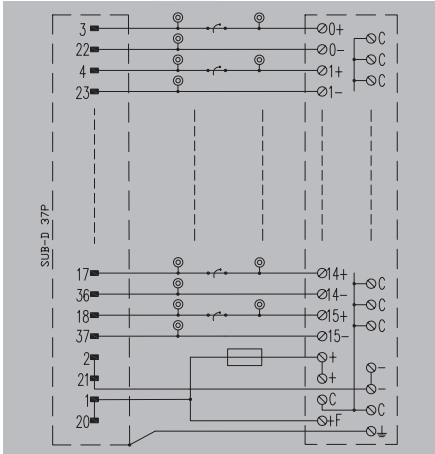

Technical data

Connection data and functionality	
Connection on control side	
Number of poles (control side)	
LED status display per channel	
LED status of the supply voltage	
Power supply fuse	
Type of test point	
Rated data	
Operating voltage	
Max. current per channel	
Operating voltage (supply)	
Operating current (supply)	
General data	
Ambient temperature (operational)	
Storage temperature	
Approvals	
Insulation coordination (EN 50178)	
Rated insulation voltage	
Surge voltage category	
Pollution severity level	
Pulse voltage test (1,2/50µs)	

Connection data and functionality	
D-sub connectors, acc. to IEC 60807 / DIN 41652	
37-pole plug	
No	
No	
3.15 A	
No	
Rated data	
≤ 25 V AC / 50 V DC	
0.5 A	
24 V DC ± 10%	
3 A	
General data	
-20...50°C	
-40...60 °C	
CE; EAC	
Insulation coordination (EN 50178)	
< 50 V AC	
III	
2	
0.8 kV	

Connection data and functionality	
D-sub connectors, acc. to IEC 60807 / DIN 41652	
37-pole plug	
No	
No	
3.15 A	
Diameter: 4 mm	
Rated data	
≤ 25 V AC / 50 V DC	
0.5 A	
24 V DC ± 10%	
3 A	
General data	
-20...50°C	
-40...60 °C	
CE; EAC	
Insulation coordination (EN 50178)	
< 50 V AC	
III	
2	
0.8 kV	

Dimensions	
Clamping range, min./max. (field)	
Clamping range, min./max. (supply)	
Mounting rail	
Length x width	
Note	

Screw connection	Tension-clamp connection
0.13 mm² / 6 mm²	0.13 mm² / 2.5 mm²
0.13 mm² / 6 mm²	0.13 mm² / 2.5 mm²
TS 32, TS 35	TS 32, TS 35
205 mm / 87 mm	205 mm / 87 mm
The common C may carry up to 3 A if the external jumpers are not used	

Screw connection	Tension-clamp connection
0.13 mm² / 6 mm²	0.13 mm² / 2.5 mm²
0.13 mm² / 6 mm²	0.13 mm² / 2.5 mm²
TS 32, TS 35	TS 32, TS 35
197 mm / 109 mm	197 mm / 109 mm
The common C may carry up to 3 A if the external jumpers are not used	

Ordering data

Type	Height	Order No.
RS 16AI0 DP SD S	81 mm	9448020000
RS 16AI0 DP SD Z	72 mm	1308270000

Type	Height	Order No.
RS 16AI0 I-M-DP SD S	81 mm	9448120000
RS 16AI0 I-M-DP SD Z	81 mm	1308280000

Note

Accessories
Note

Note

Accessories
Note

Note

Accessories
Note

RSM – Selection guide for insulated interfaces for digital input signals

Type of Interface		Features				Interfaces		
Number of channels	Family	Design	Connection		Voltage	Order No.	Type	Page
			Screw	Tension clamp connection				
16-channel	I2016	>C<			24 V DC	1312000000	RSM-16DI 24VDC S	A.62
		>C<			24 V DC	1312010000	RSM-16DI 24VDC Z	A.62
		>C<			48 V DC	1312020000	RSM-16DI 48VDC S	A.63
		>C<			48 V DC	1312030000	RSM-16DI 48VDC Z	A.63
Note								

RSM – Isolated interfaces for digital input signals


RSM – Isolated interfaces for 16 digital input signals

Relay digital input interface for transmitting electrical signals between the PLC and the field via pre-wired cables of Weidmüller's universal system:

- Electrical insulation using pluggable relays (interchangeable with solid-state relays; 6.1 mm RSS relays)

RSM-16 DI 24 V DC

6 mm relays; 24 VDC AU

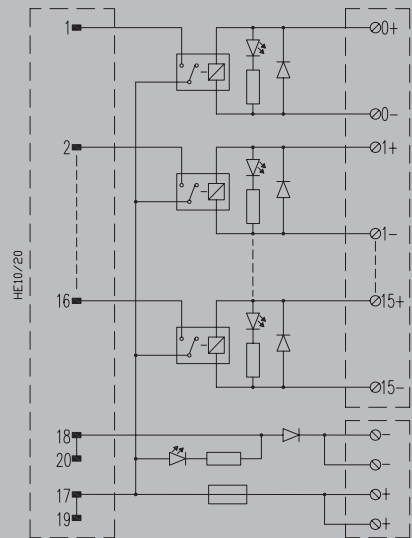

Technical data

Connection data and functionality
Connection on control side
Number of poles (control side)
Relay type
LED status display per relay
LED status of the supply voltage
Power supply fuse
Nominal input data
Input voltage
Input current
Operating voltage (supply)
Operating current (supply)
Nominal output data
Contact material
Operating voltage
Max. DC continuous current
Minimum contact current
Minimum contact voltage
Mechanical service life
General data
Ambient temperature (operational)
Storage temperature
Approvals
Insulation coordination (EN 50178)
Rated input insulation voltage
Rated output insulation voltage
Overvoltage category input/output
Overvoltage category input/input
Pollution severity level
Pulse voltage test (1,2/50µs)
Insulation test voltage
Clearance input/output
Dimensions
Clamping range, min./max. (field)
Clamping range, min./max. (supply)
Mounting rail
Length x width
Note

Connector according IEC60603-13/DIN41651
20-pole plug
RSS
green
yellow
2 A
Input voltage
24 V DC ± 10%
Input current
13 mA
Operating voltage (supply)
24 V DC ± 10%
Operating current (supply)
2 A
Contact material
AgNi gold flashed
Operating voltage
24 V DC ± 10%
Max. DC continuous current
0.1 A
Minimum contact current
1 mA
Minimum contact voltage
1 V
Mechanical service life
5 x 10 ⁶ switching cycles
Ambient temperature (operational)
-20...50°C
Storage temperature
-20...70 °C
Approvals
CE; EAC
Rated input insulation voltage
≤ 50 V DC
Rated output insulation voltage
≤ 50 V DC
Overvoltage category input/output
III
Overvoltage category input/input
III
Pollution severity level
2
Pulse voltage test (1,2/50µs)
1.5 kV
Insulation test voltage
0.35 kVAC
Clearance input/output
≥ 6 mm
Screw connection
0.13 mm ² / 6 mm ²
Tension clamp conn.
0.13 mm ² / 2.5 mm ²
0.13 mm ² / 6 mm ²
0.13 mm ² / 2.5 mm ²
TS 32, TS 35
TS 32, TS 35
124 mm / 109 mm
124 mm / 109 mm

Ordering data

Type
RSM-16DI 24VDC S
RSM-16DI 24VDC Z

Type	Height	Order No.
RSM-16DI 24VDC S	72 mm	1312000000
RSM-16DI 24VDC Z	72 mm	1312010000

Note

Accessories

Note

Relay 4061590000 RSS 24 V DC 1CD AU


RSM – Isolated interfaces for 16 digital input signals

Relay digital input interface for transmitting electrical signals between the PLC and the field via pre-wired cables of Weidmüller's universal system:

- Electrical insulation using pluggable relays (interchangeable with solid-state relays; 6.1 mm RSS relays)

RSM-16 DI 48 V DC

6 mm relays; 48 VDC AU

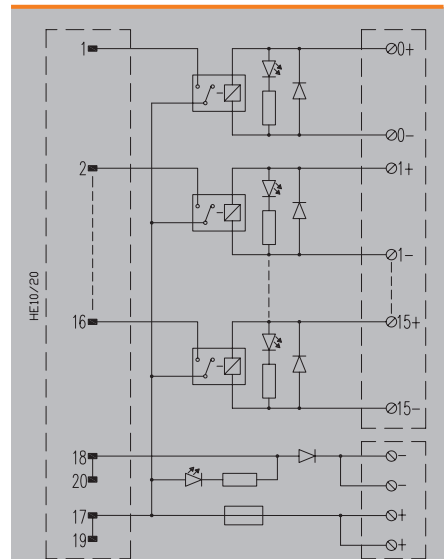

Technical data

Connection data and functionality

Connection on control side
Number of poles (control side)
Relay type
LED status display per relay
LED status of the supply voltage
Power supply fuse

Nominal input data

Input voltage
Input current
Operating voltage (supply)
Operating current (supply)

Nominal output data

Contact material
Operating voltage
Max. DC continuous current
Minimum contact current
Minimum contact voltage
Mechanical service life

General data

Ambient temperature (operational)
Storage temperature
Approvals

Insulation coordination (EN 50178)

Rated input insulation voltage
Rated output insulation voltage
Overvoltage category input/output
Overvoltage category input/input
Pollution severity level
Pulse voltage test (1,2/50µs)
Insulation test voltage
Clearance input/output

Dimensions

Clamping range, min./max. (field)
Clamping range, min./max. (supply)
Mounting rail
Length x width

Note

Connector according IEC60603-13/DIN41651

20-pole plug

RSS

green

yellow

2 A

48 V DC $\pm 10\%$

10 mA

24 V DC $\pm 10\%$

2 A

AgNi gold flashed

24 V DC $\pm 10\%$

0.1 A

2 mA

5 V

10×10^6 switching cycles

-20...50°C

-20...70 °C

CE; EAC

≤ 50 V DC

≤ 50 V DC

III

III

2

1.5 kV

0.35 kVAC

≥ 6 mm

Screw connection

0.13 mm² / 6 mm²

0.13 mm² / 6 mm²

TS 32, TS 35

124 mm / 109 mm

Tension-clamp connection

0.13 mm² / 2.5 mm²

0.13 mm² / 2.5 mm²

TS 32, TS 35

124 mm / 109 mm

Ordering data

Screw connection without switch
Tension-clamp connection without switch

Type	Height	Order No.
RSM-16DI 48VDC S	72 mm	1312020000
RSM-16DI 48VDC Z	72 mm	1312030000



Note

Accessories

Note

Relay 1313530000 RELAY 48 V 1CO AU

RSM – Selection guide for insulated interfaces for digital output signals

Type of Interface		Features								Interfaces		
Number of channels	Family	Design	Connection		Voltage	Type of contact	Fuse	Switch (coil)	Switch (contact)	Order No.	Type	Page
			Screw	Tension clamp/ PUSH IN								
8-channel	02008	>C<			24 V DC	1CO				1456540000	RSMS-8H 24V+ 1CO S	A.66
		>C<			24 V DC	1CO				1456570000	RSMS-8H 24V+ 1CO Z	A.66
		>C<			24 V DC	1CO				1128990000	RSM-8 PLC C SW 1CO S	A.67
		>C<			24 V DC	1CO				1129000000	RSM-8 PLC C SW 1CO Z	A.67
		2 lines			24 V DC	1CO				9445000000	RSM-8 C 1CO S	A.68
		2 lines			24 V DC	1CO				9447000000	RSM-8 C 1CO Z	A.68
		1 line			24 V DC	1CO				1464780000	RSM-8H 24V+ 1CO S	A.69
		1 line			24 V DC	1CO				1464790000	RSM-8H 24V+ 1CO Z	A.69
		1 line			24 V DC	1NO				1457390000	RSM-8 24VDC 1NO + C S	A.70
		1 line			24 V DC	1NO				1457400000	RSM-8 24VDC 1NO + C Z	A.70
8-channel	02008N Negative switching	>C<			24 V DC	1CO				1456550000	RSMS-8H 24V- 1CO S	A.71
		>C<			24 V DC	1CO				1456580000	RSMS-8H 24V- 1CO Z	A.71
		1 line			24 V DC	1CO				1464800000	RSM-8H 24V- 1CO S	A.72
		1 line			24 V DC	1CO				1464810000	RSM-8H 24V- 1CO Z	A.72
12-channel	02012	>C<			24 V DC	1CO				1289100000	RSM-12 PLC C 1CO S	A.73
		2 lines			24 V DC	1CO				9445060000	RSM-12 C 1CO S	A.74
16-channel	02016	>C<			24 V DC	1CO				1457300000	RSMS-16H 24V+ 1CO S	A.75
		>C<			24 V DC	1CO				1457320000	RSMS-16H 24V+ 1CO Z	A.75
		>C<			24 V DC	1CO				1129030000	RSM-16 PLC C SW 1CO S	A.76
		>C<			24 V DC	1CO				1129040000	RSM-16 PLC C SW 1CO Z	A.76
		1 line			24 V DC	1CO				1448280000	RSM-16 24V+ 1CO S	A.77
		1 line			24 V DC	1CO				1448300000	RSM-16 24V+ 1CO Z	A.77
		1 line			24 V DC (+/-)	1CO				1129120000	RSM-16 PLC SW 1CO S	A.78
		1 line			24 V DC (+/-)	1CO				1129130000	RSM-16 PLC SW 1CO Z	A.78
		2 lines			24 V DC	1CO				9445100000	RSM-16 C 1CO S	A.79
		2 lines			24 V DC	1CO				9447100000	RSM-16 C 1CO Z	A.79
		1 line			24 V DC	2CO				1449210000	RSM-16 24V+ 2CO S	A.80
		1 line			24 V DC	2CO				1449230000	RSM-16 24V+ 2CO Z	A.80
		1 line			24 V DC	1CO				9445120000	RSM-16 FUS 1CO S	A.81
		1 line			24 V DC	1CO				9447120000	RSM-16 FUS 1CO Z	A.81
		1 line			24 V DC	1CO				9445140000	RSM-16 FOR 1CO S	A.82
		1 line			24 V DC	1CO				1431720000	RSM-16 PLC I 1CO 2H S	A.83
		1 line			24 V DC	1NO				1448450000	RSM-16 24VDC 1NO + C S	A.84
		1 line			24 V DC	1NO				1448470000	RSM-16 24VDC 1NO + C Z	A.84
		1 line			24 V DC	without relays				1448480000	RSM-16 24V+ BASE S	A.85
		1 line			24 V DC	without relays				1448490000	RSM-16 24V+ BASE Z	A.85
16-channel	02016N Negative switching	>C<			24 V DC	1CO				1457310000	RSMS-16H 24V- 1CO S	A.86
		>C<			24 V DC	1CO				1457330000	RSMS-16H 24V- 1CO Z	A.86
		1 line			24 V DC	1CO				1448290000	RSM-16 24V- 1CO S	A.87
		1 line			24 V DC	1CO				1448310000	RSM-16 24V- 1CO Z	A.87
		1 line			24 V DC	2CO				1449220000	RSM-16 24V- 2CO S	A.88
		1 line			24 V DC	2CO				1449250000	RSM-16 24V- 2CO Z	A.88
Note 1:	Design:	 Relays with 6 mm relay  RCL Relays arranged in 1 single line  RCL relays (arranged in 2 rows)										
Note 2:		Voltage: Modules indicated with 24 V DC (+/-) can function as positive or negative and can function with negative logic PLC cards										

RSM – Isolated interfaces for digital output signals


RSM – Isolated interfaces for 8 digital output signals

Digital output relay interface for transmitting electrical signals between the PLC and the field via pre-wired cables of Weidmüller's universal system.

- Input/output reinforced insulation (basic between contacts)
- Positive switching

RSMS-8H 24V+ 1C0

6 mm relay with 1 C0 contact and without switch

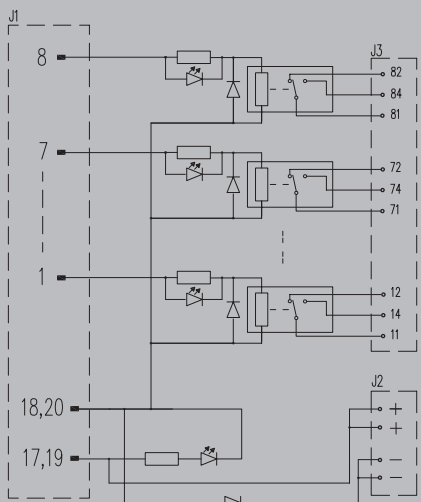

Technical data

Connection data and functionality	
Connection on control side	
Number of poles (control side)	
Relay type	
LED status display per relay	
LED status of the supply voltage	
Fuse per relay	
Power supply fuse	
Nominal input data	
Input voltage	24 V DC $\pm$ 10%
Input current	7.1 mA
Operating voltage (supply)	24 V DC $\pm$ 10%
Operating current (supply)	1 A
Nominal output data	
Contact material	AgNi 90/10
Operating voltage	250 V AC
Max. AC continuous current	4.5 A
Minimum contact current	100 mA
Minimum contact voltage	5 V
Mechanical service life	5 x 10 ⁶ switching cycles
General data	
Ambient temperature (operational)	-25...50 °C
Storage temperature	-40...60 °C
Approvals	CE; EAC
Insulation coordination (EN 50178)	
Rated input insulation voltage	< 50 V AC
Rated output insulation voltage	250 V AC
Overvoltage category input/output	III
Overvoltage category output/output	II
Pollution severity level	2
Pulse voltage test (1,2/50µs)	6 kV
Insulation test voltage	1.2 kVAC
Clearance input/output	≥ 5.5 mm
Dimensions	
Clamping range, min./max. (field)	0.13 mm ² / 6 mm ²
Clamping range, min./max. (supply)	0.13 mm ² / 6 mm ²
Mounting rail	TS 32, TS 35
Length x width	61 mm / 109 mm
Note	

Connector according IEC60603-13/DIN41651	
20-pole plug	
RSS	
green	
yellow	
No	
No	
24 V DC ± 10%	
7.1 mA	
24 V DC ± 10%	
1 A	
AgNi 90/10	
250 V AC	
4.5 A	
100 mA	
5 V	
5 x 10 ⁶ switching cycles	
-25...50°C	
-40...60 °C	
CE; EAC	
< 50 V AC	
250 V AC	
III	
II	
2	
6 kV	
1.2 kVAC	
≥ 5.5 mm	
Screw connection	Tension clamp conn.
0.13 mm ² / 6 mm ²	0.13 mm ² / 2.5 mm ²
0.13 mm ² / 6 mm ²	0.13 mm ² / 2.5 mm ²
TS 32, TS 35	TS 32, TS 35
61 mm / 109 mm	61 mm / 109 mm

Ordering data

Type	Height	Order No.
RSMS-8H 24V+ 1C0 S	85 mm	1456540000
RSMS-8H 24V+ 1C0 Z	76 mm	1456570000
Note		

Accessories

Note

Relay 4060120000 RSS 24 V DC 1C0

RSM – Isolated interfaces for 8 digital output signals

Digital output relay interface for transmitting electrical signals between the PLC and the field via pre-wired cables of Weidmüller's universal system.

- Input/output reinforced insulation (basic between contacts)
- Positive switching

RSM-8 PLC C 1CO

6 mm relay with 1 CO contact and switch



Technical data

Connection data and functionality

Connection on control side
Number of poles (control side)
Relay type
LED status display per relay
LED status of the supply voltage
Fuse per relay
Power supply fuse

Nominal input data

Input voltage
Input current
Operating voltage (supply)
Operating current (supply)

Nominal output data

Contact material
Operating voltage
Max. AC continuous current
Minimum contact current
Minimum contact voltage
Mechanical service life

General data

Ambient temperature (operational)
Storage temperature
Approvals

Insulation coordination (EN 50178)

Rated input insulation voltage
Rated output insulation voltage
Overvoltage category input/output
Overvoltage category output/output
Pollution severity level
Pulse voltage test (1,2/50µs)
Insulation test voltage
Clearance input/output

Dimensions

Clamping range, min./max. (field)
Clamping range, min./max. (supply)
Mounting rail
Length x width

Note

Connector according IEC60603-13/DIN41651
20-pole plug
RSS
green
yellow
No
2.5 A


24 V DC $\pm$ 10%
13 mA
24 V DC $\pm$ 10%
2 A

AgNi 90/10
250 V AC
2.5 A
0.1 A
5 V
5 x 10⁶ switching cycles

-25...50°C
-40...60 °C
CE; EAC

< 50 V AC
250 V AC
III
II
2
6 kV
1.2 kVAC
 $\geq$ 5.5 mm

Screw connection	Tension-clamp connection
0.13 mm ² / 6 mm ²	0.13 mm ² / 2.5 mm ²
0.13 mm ² / 6 mm ²	0.13 mm ² / 2.5 mm ²
TS 32, TS 35	TS 32, TS 35
75 mm / 109 mm	75 mm / 109 mm

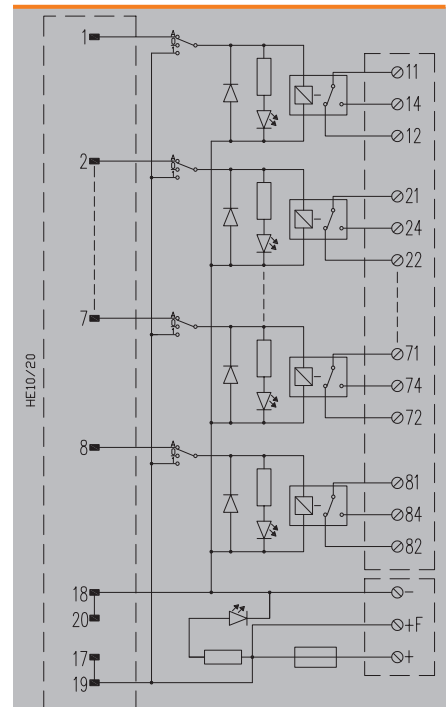

Ordering data

Screw connection without switch
Screw connection with switch
Tension-clamp connection without switch
Tension-clamp connection with switch

Note

Accessories

Note

Type	Height	Order No.
RSM-8 PLC C SW 1CO S	85 mm	1128990000
RSM-8 PLC C SW 1CO Z	80 mm	1129000000

Relay 4060120000 RSS 24 V DC 1CO

RSM – Isolated interfaces for digital output signals

RSM – Isolated interfaces

for 8 digital output signals

Digital output relay interface for transmitting electrical signals between the PLC and the field via pre-wired cables of Weidmüller's universal system.

- Input/output reinforced insulation (basic between contacts)
- Positive switching

RSM-8 C 1C

RCL relays (arranged in 2 rows) with 1 CO contact



Technical data

Connection data and functionality

Connection on control side
Number of poles (control side)
Relay type
LED status display per relay
LED status of the supply voltage
Fuse per relay
Power supply fuse

Nominal input data

Input voltage
Input current
Operating voltage (supply)
Operating current (supply)

Nominal output data

Contact material
Operating voltage
Max. AC continuous current
Minimum contact current
Minimum contact voltage
Mechanical service life

General data

Ambient temperature (operational)
Storage temperature
Approvals

Insulation coordination (EN 50178)

Rated input insulation voltage
Rated output insulation voltage
Overvoltage category input/output
Overvoltage category output/output
Pollution severity level
Pulse voltage test (1,2/50µs)
Insulation test voltage
Clearance input/output

Dimensions

Clamping range, min./max. (field)
Clamping range, min./max. (supply)
Mounting rail
Length x width

Note

Connector according IEC60603-13/DIN41651

20-pole plug

RCL

green

yellow

No

3.15 A

24 V DC ± 10%

20 mA

24 V DC ± 10%

2 A

AgNi 90/10

250 V AC

5 A

0.01 A

10 V

3 x 10⁷ switching cycles

-25...50°C

-40...60 °C

CE; EAC

< 50 V AC

< 250 V AC

III

II

2

6 kV

1.2 kVAC

≥ 5.5 mm

Screw connection

0.13 mm² / 6 mm²

0.13 mm² / 6 mm²

TS 35, TS 32

110 mm / 109 mm


Tension-clamp connection

0.13 mm² / 2.5 mm²

0.13 mm² / 2.5 mm²

TS 35, TS 32

110 mm / 109 mm

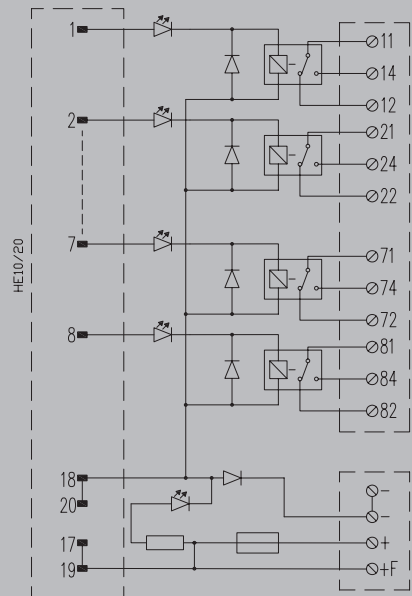

Ordering data

Screw connection without switch
Screw connection with switch
Tension-clamp connection without switch
Tension-clamp connection with switch

Note

Accessories

Note

Type	Height	Order No.
RSM-8 C 1CO S	68 mm	9445000000
RSM-8 C 1CO Z	68 mm	9447000000

Relay 8693260000 RCL314024 24 V DC 1CO


RSM – Isolated interfaces for 8 digital output signals

Digital output relay interface for transmitting electrical signals between the PLC and the field via pre-wired cables of Weidmüller's universal system.

- Input/output reinforced insulation (basic between contacts)
- Positive switching

RSM-8H 24V+ 1CO

RCL relays (arranged in 1 row) with 1 CO contact

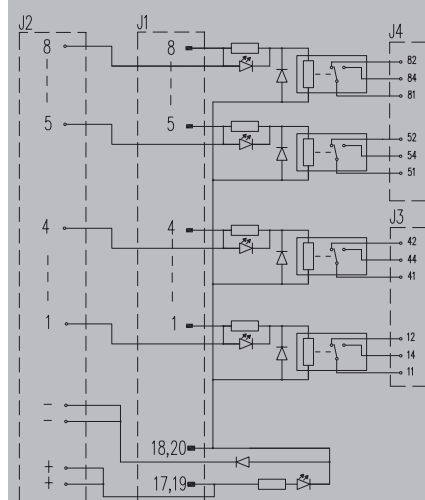

Technical data

Connection data and functionality

Connection on control side
Number of poles (control side)
Relay type
LED status display per relay
LED status of the supply voltage
Fuse per relay
Power supply fuse

Nominal input data

Input voltage
Input current
Operating voltage (supply)
Operating current (supply)

Nominal output data

Contact material
Operating voltage
Max. AC continuous current
Minimum contact current
Minimum contact voltage
Mechanical service life

General data

Ambient temperature (operational)
Storage temperature
Approvals

Insulation coordination (EN 50178)

Rated input insulation voltage
Rated output insulation voltage
Overvoltage category input/output
Overvoltage category output/output
Pollution severity level
Pulse voltage test (1,2/50µs)
Insulation test voltage
Clearance input/output

Dimensions

Clamping range, min./max. (field)
Clamping range, min./max. (supply)
Mounting rail
Length x width

Note

LP 5.08 + Connector according IEC60603-13/DIN41651 20 poles
20-pole plug

RCL

green

yellow

No

No

24 V DC $\pm$ 10%

16.7 mA

24 V DC $\pm$ 10%

1 A

AgNi 90/10

250 V AC

6 A

0.1 A

5 V

3 x 10⁷ switching cycles

-25...50°C

-40...60 °C

CE; EAC

< 50 V AC

250 V AC

III

II

2

6 kV

1.2 kVAC

$\geq$ 5.5 mm

Screw connection

0.13 mm² / 6 mm²

0.13 mm² / 6 mm²

TS 32, TS 35

130 mm / 87 mm

PUSH IN connection

0.12 mm² / 2.5 mm²

0.12 mm² / 2.5 mm²

TS 32, TS 35

130 mm / 87 mm

Ordering data

Screw connection without switch
PUSH IN connection without switch

Type	Height	Order No.
RSM-8H 24V+ 1CO S	62 mm	1464780000
RSM-8H 24V+ 1CO Z	62 mm	1464790000

Note

Accessories

Note

Relay 8693260000 RCL314024 24Vdc 1CO

RSM – Isolated interfaces for digital output signals


RSM – Isolated interfaces for 8 digital output signals

Digital output relay interface for transmitting electrical signals between the PLC and the field via pre-wired cables of Weidmüller's universal system.

- Input/output reinforced insulation (basic between contacts)
- Positive switching

RSM-8 24 V DC 1NO + C

RCL relays (arranged in 1 rows) with 1 NO contact

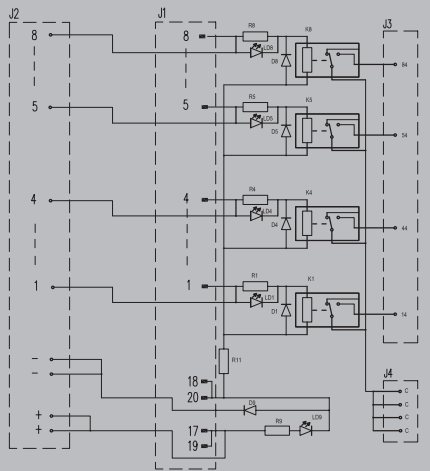

Technical data

Connection data and functionality	
Connection on control side	
Number of poles (control side)	
Relay type	
LED status display per relay	
LED status of the supply voltage	
Fuse per relay	
Power supply fuse	
Nominal input data	
Input voltage	
Input current	
Operating voltage (supply)	
Operating current (supply)	
Nominal output data	
Contact material	
Operating voltage	
Max. AC continuous current	
Minimum contact current	
Minimum contact voltage	
Mechanical service life	
General data	
Ambient temperature (operational)	
Storage temperature	
Approvals	
Insulation coordination (EN 50178)	
Rated input insulation voltage	
Rated output insulation voltage	
Overvoltage category input/output	
Overvoltage category output/output	
Pollution severity level	
Pulse voltage test (1,2/50µs)	
Insulation test voltage	
Clearance input/output	
Dimensions	
Clamping range, min./max. (field)	
Clamping range, min./max. (supply)	
Mounting rail	
Length x width	
Note	

LP 5.08 + Connector according IEC60603-13/DIN41651 20 poles	
20-pole plug	
RCL	
green	
yellow	
No	
No	
24 V DC ± 10%	
16.7 mA	
24 V DC ± 10%	
1 A	
AgNi 90/10	
250 V AC	
6 A	
0.1 A	
5 V	
3 x 10 ⁷ switching cycles	
-25...50°C	
-40...60 °C	
CE; EAC	
< 50 V AC	
250 V AC	
III	
II	
2	
6 kV	
1.2 kVAC	
≥ 5.5 mm	
Screw connection	PUSH IN connection
0.13 mm ² / 6 mm ²	0.12 mm ² / 2.5 mm ²
0.13 mm ² / 6 mm ²	0.12 mm ² / 2.5 mm ²
TS 32, TS 35	TS 32, TS 35
130 mm / 87 mm	130 mm / 87 mm

Ordering data

Screw connection without switch
PUSH IN connection without switch

Type	Height	Order No.
RSM-8 24VDC 1NO + C S	62 mm	1457390000
RSM-8 24VDC 1NO + C Z	62 mm	1457400000

Note

Accessories

Note

Relay 8693260000 RCL314024 24Vdc 1CO


RSM – Isolated interfaces for 8 digital output signals

Digital output relay interface for transmitting electrical signals between the PLC and the field via pre-wired cables of Weidmüller's universal system.

- Input/output reinforced insulation (basic between contacts)
- Negative switching

RSMS-8H 24 V- 1CO

6 mm relay with 1 CO contact and without switch

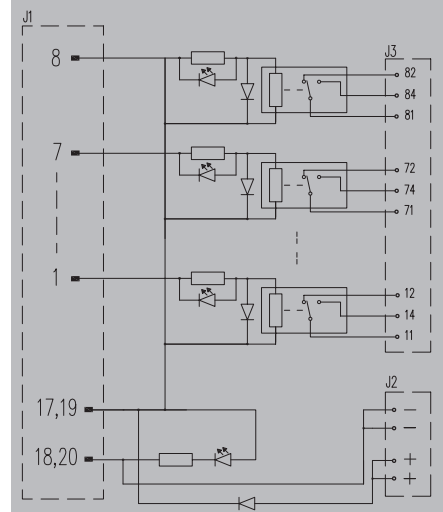

Technical data

Connection data and functionality

Connection on control side
Number of poles (control side)
Relay type
LED status display per relay
LED status of the supply voltage
Fuse per relay
Power supply fuse

Nominal input data

Input voltage
Input current
Operating voltage (supply)
Operating current (supply)

Nominal output data

Contact material
Operating voltage
Max. AC continuous current
Minimum contact current
Minimum contact voltage
Mechanical service life

General data

Ambient temperature (operational)
Storage temperature
Approvals

Insulation coordination (EN 50178)

Rated input insulation voltage
Rated output insulation voltage
Overvoltage category input/output
Overvoltage category output/output
Pollution severity level
Pulse voltage test (1,2/50µs)
Insulation test voltage
Clearance input/output

Dimensions

Clamping range, min./max. (field)
Clamping range, min./max. (supply)
Mounting rail
Length x width

Note

Connector according IEC60603-13/DIN41651
20-pole plug
RSS
green
yellow
No
No

24 V DC $\pm$ 10%
7.1 mA
24 V DC $\pm$ 10%
1 A

AgNi 90/10
250 V AC
4.5 A
100 mA
5 V
5 x 10⁶ switching cycles

-25...50°C
-40...60°C
CE; EAC

< 50 V AC
250 V AC
III
II
2
6 kV
1.2 kVAC
 $\geq$ 5.5 mm

Screw connection	Tension-clamp connection
0.13 mm ² / 6 mm ²	0.13 mm ² / 2.5 mm ²
0.13 mm ² / 6 mm ²	0.13 mm ² / 2.5 mm ²
TS 32, TS 35	TS 32, TS 35
61 mm / 109 mm	61 mm / 109 mm

Ordering data

Screw connection without switch
Tension-clamp connection without switch

Type	Height	Order No.
RSMS-8H 24V- 1CO S	85 mm	1456550000
RSMS-8H 24V- 1CO Z	76 mm	1456580000

Note

Accessories

Note


Relay 4060120000 RSS V DC 1CO

RSM – Isolated interfaces for digital output signals

RSM – Isolated interfaces
for 8 digital output signals

Digital output relay interface for transmitting electrical signals between the PLC and the field via pre-wired cables of Weidmüller's universal system.

- Input/output reinforced insulation (basic between contacts)
- Negative switching



RSM-8H 24 V-1C0

RCL relays (arranged in 1 row) with 1 C0 contact



Technical data

Connection data and functionality
Connection on control side
Number of poles (control side)
Relay type
LED status display per relay
LED status of the supply voltage
Fuse per relay
Power supply fuse
Nominal input data
Input voltage
Input current
Operating voltage (supply)
Operating current (supply)
Nominal output data
Contact material
Operating voltage
Max. AC continuous current
Minimum contact current
Minimum contact voltage
Mechanical service life
General data
Ambient temperature (operational)
Storage temperature
Approvals
Insulation coordination (EN 50178)
Rated input insulation voltage
Rated output insulation voltage
Overvoltage category input/output
Overvoltage category output/output
Pollution severity level
Pulse voltage test (1,2/50µs)
Insulation test voltage
Clearance input/output
Dimensions
Clamping range, min./max. (field)
Clamping range, min./max. (supply)
Mounting rail
Length x width
Note

Ordering data

Screw connection without switch
PUSH IN connection without switch

Note

Accessories


Note

LP 5.08 + Connector according IEC60603-13/DIN41651 20 poles
20-pole plug
RCL
green
yellow
No
No
24 V DC ± 10%
16.7 mA
24 V DC ± 10%
1 A
AgNi 90/10
250 V AC
6 A
0.1 A
5 V
3 x 10 ⁷ switching cycles
-25...50°C
-40...60 °C
CE; EAC
< 50 V AC
250 V AC
III
II
2
6 kV
1.2 kVAC
≥ 5.5 mm
Screw connection
0.13 mm ² / 6 mm ²
0.13 mm ² / 6 mm ²
TS 32, TS 35
130 mm / 87 mm
PUSH IN connection
0.12 mm ² / 2.5 mm ²
0.12 mm ² / 2.5 mm ²
TS 32, TS 35
130 mm / 87 mm

Type	Height	Order No.
RSM-8H 24V- 1C0 S	62 mm	1464800000
RSM-8H 24V- 1C0 Z	62 mm	1464810000

Note

Relay 8693260000 RCL314024 24Vdc 1C0

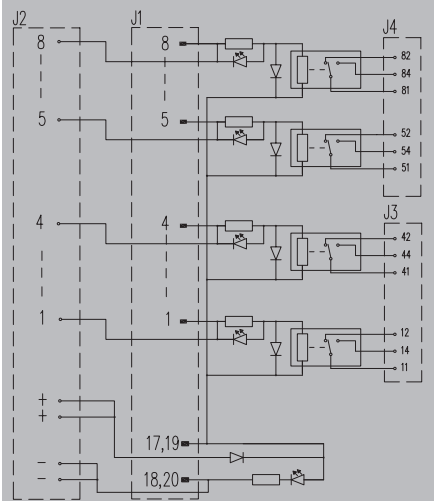


RSM – Isolated interfaces for 12 digital output signals

Digital output relay interface for transmitting electrical signals between the PLC and the field via pre-wired cables of Weidmüller's universal system.

- Input/output reinforced insulation (basic between contacts)
- Positive switching

RSM-12 PLC 1C

6 mm relay with 1 C0 contact



Technical data

Connection data and functionality

Connection on control side
Number of poles (control side)
Relay type
LED status display per relay
LED status of the supply voltage
Fuse per relay
Power supply fuse

Nominal input data

Input voltage
Input current
Operating voltage (supply)
Operating current (supply)

Nominal output data

Contact material
Operating voltage
Max. AC continuous current
Minimum contact current
Minimum contact voltage
Mechanical service life

General data

Ambient temperature (operational)
Storage temperature
Approvals

Insulation coordination (EN 50178)

Rated input insulation voltage
Rated output insulation voltage
Overvoltage category input/output
Overvoltage category output/output
Pollution severity level
Pulse voltage test (1,2/50µs)
Insulation test voltage
Clearance input/output

Dimensions

Clamping range, min./max. (field)
Clamping range, min./max. (supply)
Mounting rail
Length x width

Note

Connector according IEC60603-13/DIN41651
20-pole plug
RSS
green
yellow
No
2.5 A

AgNi 90/10
250 V AC
2.5 A
0.1 A
5 V
5 x 10⁶ switching cycles

-25...50°C
-40...60 °C
CE; EAC

< 50 V AC
250 V AC
III
II
2
6 kV
1.2 kVAC
≥ 5.5 mm

Screw connection

0.13 mm² / 6 mm²
0.13 mm² / 6 mm²
TS 32, TS 35
95 mm / 109 mm

Ordering data

Screw connection without switch


Type	Height	Order No.
RSM-12 PLC C 1C0 S	85 mm	1289100000

Note

Accessories

Note

Relay 4060120000 RSS 24 V DC 1C0

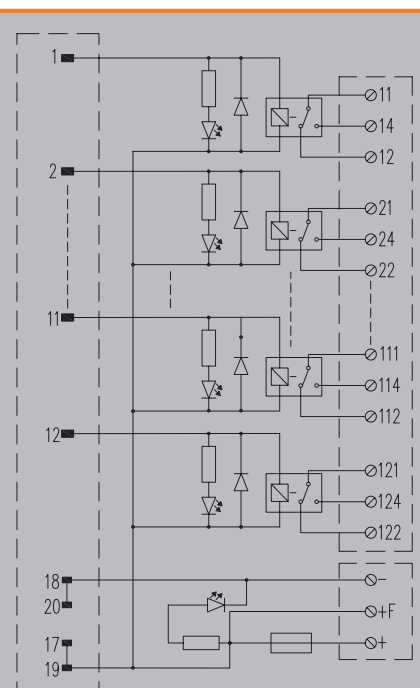

RSM – Isolated interfaces for digital output signals

RSM – Isolated interfaces
for 12 digital output signals

Digital output relay interface for transmitting electrical signals between the PLC and the field via pre-wired cables of Weidmüller's universal system.

- Input/output reinforced insulation (basic between contacts)
- Positive switching

RSM-12 C 1CO S

RCL relays (arranged in 2 rows) with 1 CO contact



Technical data

Connection data and functionality	
Connection on control side	
Number of poles (control side)	
Relay type	
LED status display per relay	
LED status of the supply voltage	
Fuse per relay	
Power supply fuse	
Nominal input data	
Input voltage	
Input current	
Operating voltage (supply)	
Operating current (supply)	
Nominal output data	
Contact material	
Operating voltage	
Max. AC continuous current	
Minimum contact current	
Minimum contact voltage	
Mechanical service life	
General data	
Ambient temperature (operational)	
Storage temperature	
Approvals	
Insulation coordination (EN 50178)	
Rated input insulation voltage	
Rated output insulation voltage	
Overvoltage category input/output	
Overvoltage category output/output	
Pollution severity level	
Pulse voltage test (1,2/50µs)	
Insulation test voltage	
Clearance input/output	
Dimensions	
Clamping range, min./max. (field)	
Clamping range, min./max. (supply)	
Mounting rail	
Length x width	
Note	

Connector according IEC60603-13/DIN41651	
20-pole plug	
RCL	
green	
yellow	
No	
3.15 A	
24 V DC ± 10%	
20 mA	
24 V DC ± 10%	
2 A	
AgNi 90/10	
250 V AC	
5 A	
0.01 A	
10 V	
3 x 10 ⁷ switching cycles	
-25...40°C	
-40...60 °C	
CE; EAC	
< 50 V AC	
< 250 V AC	
III	
II	
2	
6 kV	
1.2 kVAC	
≥ 5.5 mm	
Screw connection	
0.13 mm ² / 6 mm ²	
0.13 mm ² / 6 mm ²	
TS 35, TS 32	
147 mm / 109 mm	

Ordering data

Screw connection without switch

Type	Height	Order No.
RSM-12 C 1CO S	68 mm	9445060000

Note

Accessories

Note

Relay 8693260000 RCL314024 24 V DC 1CO
--




RSM – Isolated interfaces**for 16 digital output signals**

Digital output relay interface for transmitting electrical signals between the PLC and the field via pre-wired cables of Weidmüller's universal system.

- Input/output reinforced insulation (basic between contacts)
- Positive switching

RSMS-16H 24V+ 1CO

6 mm relay with 1 CO contact and without switch

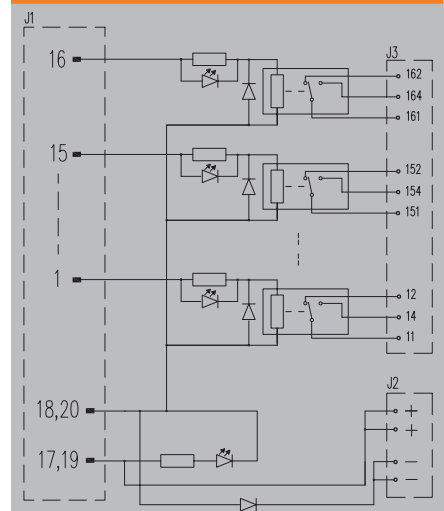**Technical data****Connection data and functionality**

Connection on control side
Number of poles (control side)
Relay type
LED status display per relay
LED status of the supply voltage
Fuse per relay
Power supply fuse

Nominal input data

Input voltage
Input current
Operating voltage (supply)
Operating current (supply)

Nominal output data

Contact material
Operating voltage
Max. AC continuous current
Minimum contact current
Minimum contact voltage
Mechanical service life

General data

Ambient temperature (operational)
Storage temperature
Approvals

Insulation coordination (EN 50178)

Rated input insulation voltage
Rated output insulation voltage
Overvoltage category input/output
Overvoltage category output/output
Pollution severity level
Pulse voltage test (1,2/50µs)
Insulation test voltage
Clearance input/output

Dimensions

Clamping range, min./max. (field)
Clamping range, min./max. (supply)
Mounting rail
Length x width

Note

Connector according IEC60603-13/DIN41651
20-pole plug
RSS
green
yellow
No
No

24 V DC $\pm$ 10%
7.1 mA
24 V DC $\pm$ 10%
1 A

AgNi 90/10
250 V AC
4.5 A
100 mA
5 V
5 x 10⁶ switching cycles

-25...50°C
-40...60 °C
CE; EAC

< 50 V AC
250 V AC
III
II
2
6 kV
1.2 kVAC
 $\geq$ 5.5 mm

Screw connection	Tension-clamp connection
0.13 mm ² / 6 mm ²	0.13 mm ² / 2.5 mm ²
0.13 mm ² / 6 mm ²	0.13 mm ² / 2.5 mm ²
TS 32, TS 35	TS 32, TS 35
112 mm / 109 mm	112 mm / 109 mm

Ordering data

Screw connection without switch
Screw connection with switch
Tension-clamp connection without switch
Tension-clamp connection with switch

Note

Type	Height	Order No.
RSMS-16H 24V+ 1CO S	85 mm	1457300000
RSMS-16H 24V+ 1CO Z	76 mm	1457320000

Accessories**Note**

Relay 4060120000 RSS 24 V DC 1CO

RSM – Isolated interfaces for digital output signals

RSM – Isolated interfaces for 16 digital output signals

Digital output relay interface for transmitting electrical signals between the PLC and the field via pre-wired cables of Weidmüller's universal system.

- Input/output reinforced insulation (basic between contacts)
- Positive switching

RSM-16 PLC C 1CO

6 mm relay with 1 CO contact and switch



Technical data

Connection data and functionality	
Connection on control side	
Number of poles (control side)	
Relay type	
LED status display per relay	
LED status of the supply voltage	
Fuse per relay	
Power supply fuse	
Nominal input data	
Input voltage	
Input current	
Operating voltage (supply)	
Operating current (supply)	
Nominal output data	
Contact material	
Operating voltage	
Max. AC continuous current	
Minimum contact current	
Minimum contact voltage	
Mechanical service life	
General data	
Ambient temperature (operational)	
Storage temperature	
Approvals	
Insulation coordination (EN 50178)	
Rated input insulation voltage	
Rated output insulation voltage	
Overvoltage category input/output	
Overvoltage category output/output	
Pollution severity level	
Pulse voltage test (1,2/50µs)	
Insulation test voltage	
Clearance input/output	
Dimensions	
Clamping range, min./max. (field)	
Clamping range, min./max. (supply)	
Mounting rail	
Length x width	
Note	

Connector according IEC60603-13/DIN41651	
20-pole plug	
RSS	
green	
yellow	
No	
2.5 A	
24 V DC ± 10%	
13 mA	
24 V DC ± 10%	
2 A	
AgNi 90/10	
250 V AC	
2.5 A	
0.1 A	
5 V	
5 x 10 ⁶ switching cycles	
-25...50°C	
-40...60 °C	
CE; EAC	
< 50 V AC	
250 V AC	
III	
II	
2	
6 kV	
1.2 kVAC	
≥ 5.5 mm	
Screw connection	Tension-clamp connection
0.13 mm ² / 6 mm ²	0.13 mm ² / 2.5 mm ²
0.13 mm ² / 6 mm ²	0.13 mm ² / 2.5 mm ²
TS 32, TS 35	TS 32, TS 35
111 mm / 109 mm	111 mm / 109 mm

Ordering data


	Screw connection without switch
	Screw connection with switch
	Tension-clamp connection without switch
	Tension-clamp connection with switch
Note	

Accessories

Note

Type	Height	Order No.
RSM-16 PLC C SW 1CO S	85 mm	1129030000
RSM-16 PLC C SW 1CO Z	80 mm	1129040000

Relay 4060120000 RSS 24 V DC 1CO

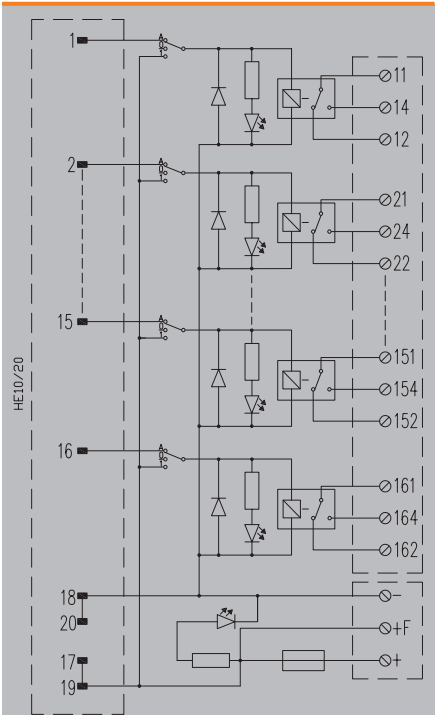


RSM – Isolated interfaces for 16 digital output signals

Digital output relay interface for transmitting electrical signals between the PLC and the field via pre-wired cables of Weidmüller's universal system.

- Input/output reinforced insulation (basic between contacts)
- Positive switching

RSM-16 24V+ 1CO

RCL relays (arranged in 1 rows) with 1 CO contact

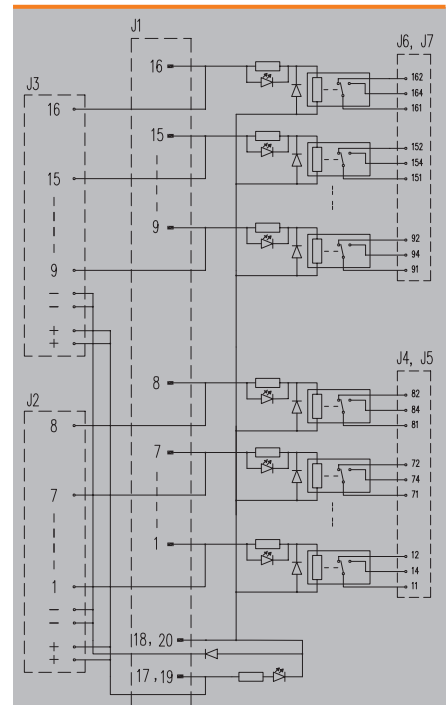

Technical data

Connection data and functionality

Connection on control side
Number of poles (control side)
Relay type
LED status display per relay
LED status of the supply voltage
Fuse per relay
Power supply fuse

Nominal input data

Input voltage
Input current
Operating voltage (supply)
Operating current (supply)

Nominal output data

Contact material
Operating voltage
Max. AC continuous current
Minimum contact current
Minimum contact voltage
Mechanical service life

General data

Ambient temperature (operational)
Storage temperature
Approvals

Insulation coordination (EN 50178)

Rated input insulation voltage
Rated output insulation voltage
Overvoltage category input/output
Overvoltage category output/output
Pollution severity level
Pulse voltage test (1,2/50µs)
Insulation test voltage
Clearance input/output

Dimensions

Clamping range, min./max. (field)
Clamping range, min./max. (supply)
Mounting rail
Length x width

Note

Connector according IEC60603-13/DIN41651
20-pole plug
RCL
green
yellow
No
No

24 V DC $\pm$ 10%
16.7 mA
24 V DC $\pm$ 10%
1 A
AgNi 90/10
250 V AC
6 A
0.1 A
5 V
30 x 10⁶ switching cycles

-25...50°C
-40...60 °C
CE, EAC

< 50 V AC
250 V AC
III
II
2
6 kV
1.2 kVAC
 $\geq$ 5.5 mm

Screw connection	PUSH IN connection
0.13 mm ² / 6 mm ²	0.12 mm ² / 2.5 mm ²
0.13 mm ² / 6 mm ²	0.12 mm ² / 2.5 mm ²
TS 32, TS 35	TS 32, TS 35
259 mm / 87 mm	259 mm / 87 mm

Ordering data

Screw connection without switch
PUSH IN connection without switch

Type	Height	Order No.
RSM-16 24V+ 1CO S	66 mm	1448280000
RSM-16 24V+ 1CO Z	66 mm	1448300000

Note

Accessories

Note

Relay 8693260000 RCL314024 24 V DC 1CO

RSM – Isolated interfaces for digital output signals



RSM – Isolated interfaces for 16 digital output signals

Digital output relay interface for transmitting electrical signals between the PLC and the field via pre-wired cables of Weidmüller's universal system.

- Input/output reinforced insulation (basic between contacts)
- Positive switching

RSM-16 PLC 1CO

6 mm relay with 1 CO contact and switch

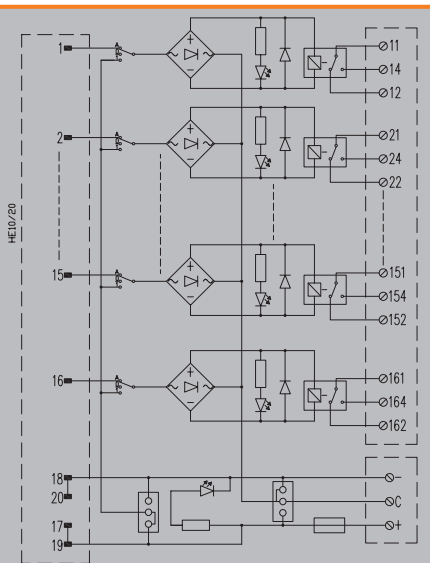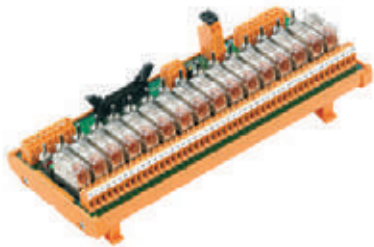

Technical data

Connection data and functionality	
Connection on control side	
Number of poles (control side)	
Relay type	
LED status display per relay	
LED status of the supply voltage	
Fuse per relay	
Power supply fuse	
Nominal input data	
Input voltage	
Input current	
Operating voltage (supply)	
Operating current (supply)	
Nominal output data	
Contact material	
Operating voltage	
Max. AC continuous current	
Minimum contact current	
Minimum contact voltage	
Mechanical service life	
General data	
Ambient temperature (operational)	
Storage temperature	
Approvals	
Insulation coordination (EN 50178)	
Rated input insulation voltage	
Rated output insulation voltage	
Overvoltage category input/output	
Overvoltage category output/output	
Pollution severity level	
Pulse voltage test (1,2/50µs)	
Insulation test voltage	
Clearance input/output	
Dimensions	
Clamping range, min./max. (field)	
Clamping range, min./max. (supply)	
Mounting rail	
Length x width	
Note	

Connector according IEC60603-13/DIN41651	
20-pole plug	
RCL	
green	
yellow	
No	
2.5 A	
24 V DC ± 10%	
22 mA	
24 V DC ± 10%	
2 A	
AgNi 90/10	
250 V AC	
6 A	
0.01 A	
10 V	
3 x 10 ⁷ switching cycles	
-25...50°C	
-40...60 °C	
CE; EAC	
< 50 V AC	
250 V AC	
III	
II	
2	
6 kV	
1.2 kVAC	
≥ 5.5 mm	
Screw connection	Tension-clamp connection
0.13 mm ² / 6 mm ²	0.13 mm ² / 2.5 mm ²
0.13 mm ² / 6 mm ²	0.13 mm ² / 2.5 mm ²
TS 32, TS 35	TS 32, TS 35
255 mm / 109 mm	255 mm / 109 mm

Ordering data

	Screw connection without switch
	Screw connection with switch
	Tension-clamp connection without switch
	Tension-clamp connection with switch
Note	

Type	Height	Order No.
RSM-16 PLC SW 1CO S	68 mm	1129120000
RSM-16 PLC SW 1CO Z	68 mm	1129130000

Accessories

Note

Relay 8693260000 RCL314024 24 V DC 1CO
--



RSM – Isolated interfaces for 16 digital output signals

Digital output relay interface for transmitting electrical signals between the PLC and the field via pre-wired cables of Weidmüller's universal system.

- Input/output reinforced insulation (basic between contacts)
- Positive switching

RSM-16 C 1CO

RCL relays (arranged in 2 rows) with 1 CO contact

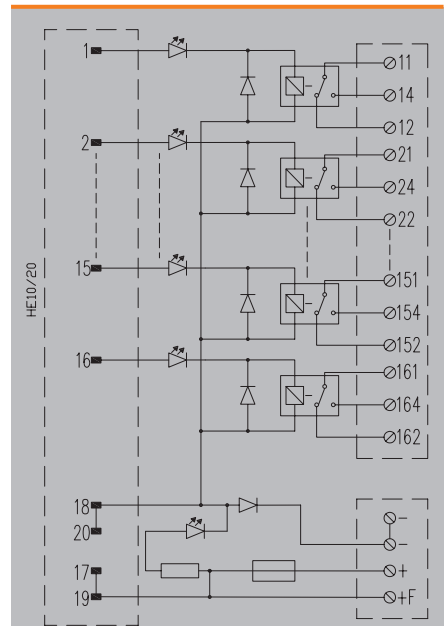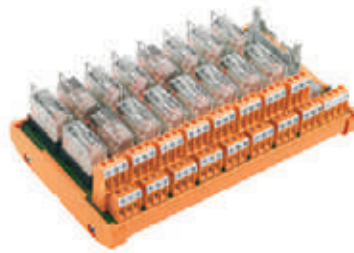

Technical data

Connection data and functionality

Connection on control side
Number of poles (control side)
Relay type
LED status display per relay
LED status of the supply voltage
Fuse per relay
Power supply fuse

Nominal input data

Input voltage
Input current
Operating voltage (supply)
Operating current (supply)

Nominal output data

Contact material
Operating voltage
Max. AC continuous current
Minimum contact current
Minimum contact voltage
Mechanical service life

General data

Ambient temperature (operational)
Storage temperature
Approvals

Insulation coordination (EN 50178)

Rated input insulation voltage
Rated output insulation voltage
Overvoltage category input/output
Overvoltage category output/output
Pollution severity level
Pulse voltage test (1,2/50µs)
Insulation test voltage
Clearance input/output

Dimensions

Clamping range, min./max. (field)
Clamping range, min./max. (supply)
Mounting rail
Length x width

Note

Connector according IEC60603-13/DIN41651

20-pole plug

RCL

green

yellow

No

3.15 A

24 V DC $\pm$ 10%

20 mA

24 V DC $\pm$ 10%

2 A

AgNi 90/10

250 V AC

5 A

0.01 A

10 V

3 x 10⁷ switching cycles

-25...40°C

-40...60 °C

CE; EAC

< 50 V AC

< 250 V AC

III

II

2

6 kV

1.2 kVAC

≥ 5.5 mm

Screw connection

0.13 mm² / 6 mm²

0.13 mm² / 6 mm²

TS 35, TS 32

185 mm / 109 mm

Tension-clamp connection

0.15 mm² / 1.5 mm²

0.15 mm² / 1.5 mm²

TS 35, TS 32

185 mm / 109 mm

Ordering data

Screw connection without switch

Screw connection with switch

Tension-clamp connection without switch

Tension-clamp connection with switch

Note

Accessories

Note

Type	Height	Order No.
RSM-16 C 1CO S	68 mm	9445100000
RSM-16 C 1CO Z	68 mm	9447100000

Relay 8693260000 RCL314024 24 V DC 1CO

RSM – Isolated interfaces for digital output signals



RSM – Isolated interfaces for 16 digital output signals

Digital output relay interface for transmitting electrical signals between the PLC and the field via pre-wired cables of Weidmüller's universal system.

- Input/output reinforced insulation (basic between contacts)
- Positive switching

RSM-16 24V+ 2CO

RCL relays (arranged in 1 rows) with 2 CO contact



Technical data

Connection data and functionality	
Connection on control side	
Number of poles (control side)	
Relay type	
LED status display per relay	
LED status of the supply voltage	
Fuse per relay	
Power supply fuse	
Nominal input data	
Input voltage	
Input current	
Operating voltage (supply)	
Operating current (supply)	
Nominal output data	
Contact material	
Operating voltage	
Max. AC continuous current	
Minimum contact current	
Minimum contact voltage	
Mechanical service life	
General data	
Ambient temperature (operational)	
Storage temperature	
Approvals	
Insulation coordination (EN 50178)	
Rated input insulation voltage	
Rated output insulation voltage	
Overvoltage category input/output	
Overvoltage category output/output	
Pollution severity level	
Pulse voltage test (1,2/50µs)	
Insulation test voltage	
Clearance input/output	
Dimensions	
Clamping range, min./max. (field)	
Clamping range, min./max. (supply)	
Mounting rail	
Length x width	
Note	

Connector according IEC60603-13/DIN41651	
20-pole plug	
RCL	
green	
yellow	
No	
No	
24 V DC ± 10%	
16.7 mA	
24 V DC ± 10%	
1 A	
AgNi 90/10	
250 V AC	
5 A	
0.1 A	
5 V	
30 x 10 ⁶ switching cycles	
-25...50°C	
-40...60 °C	
CE; EAC	
< 50 V AC	
250 V AC	
III	
III	
2	
6 kV	
1.2 kVAC	
≥ 5.5 mm	
Screw connection	Tension-clamp connection
0.13 mm ² / 6 mm ²	0.13 mm ² / 2.5 mm ²
0.13 mm ² / 6 mm ²	0.13 mm ² / 2.5 mm ²
TS 32, TS 35	TS 32, TS 35
290 mm / 109 mm	290 mm / 109 mm

Ordering data


	Screw connection without switch
	Screw connection with switch
	Tension-clamp connection without switch
	Tension-clamp connection with switch
Note	

Type	Height	Order No.
RSM-16 24V+ 2CO S	71 mm	1449210000
RSM-16 24V+ 2CO Z	66 mm	1449230000

Accessories

Note

Relay 4058570000 RCL424024 24 V DC 2CO
--

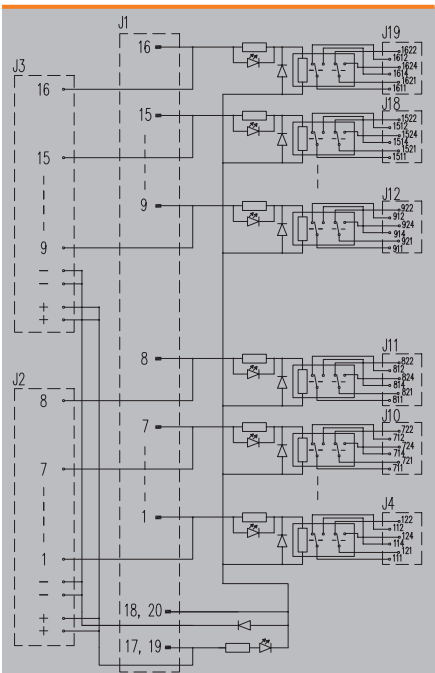


RSM – Isolated interfaces**for 16 digital output signals**

Digital output relay interface for transmitting electrical signals between the PLC and the field via pre-wired cables of Weidmüller's universal system.

- Input/output reinforced insulation (basic between contacts)
- Positive switching

RSM-16 FUS 1C0

RCL relays, 1 C0 contact with fuse relay contact

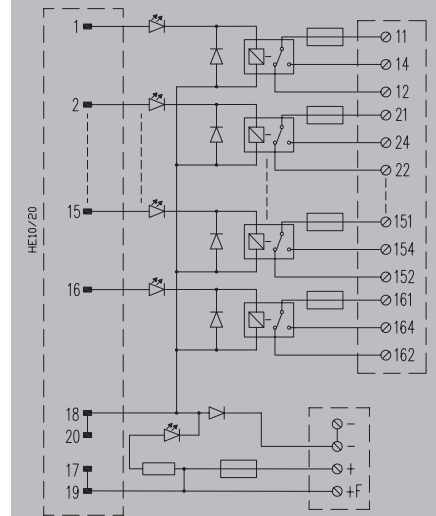**Technical data****Connection data and functionality**

Connection on control side
Number of poles (control side)
Relay type
LED status display per relay
LED status of the supply voltage
Fuse per relay
Power supply fuse

Nominal input data

Input voltage
Input current
Operating voltage (supply)
Operating current (supply)

Nominal output data

Contact material
Operating voltage
Max. AC continuous current
Minimum contact current
Minimum contact voltage
Mechanical service life

General data

Ambient temperature (operational)
Storage temperature
Approvals

Insulation coordination (EN 50178)

Rated input insulation voltage
Rated output insulation voltage
Overvoltage category input/output
Overvoltage category output/output
Pollution severity level
Pulse voltage test (1,2/50µs)
Insulation test voltage
Clearance input/output

Dimensions

Clamping range, min./max. (field)
Clamping range, min./max. (supply)
Mounting rail
Length x width

Note

Connector according IEC60603-13/DIN41651

20-pole plug

RCL

green

yellow

5 A

3.15 A

24 V DC $\pm$ 10%

20 mA

24 V DC $\pm$ 10%

2 A

AgNi 90/10

250 V AC

5 A

0.01 A

10 V

3 x 10⁷ switching cycles

-25...40°C

-40...60 °C

CE; EAC

< 50 V AC

< 250 V AC

III

II

2

6 kV

1.2 kVAC

$\geq$ 5.5 mm

Screw connection

0.13 mm² / 6 mm²

0.13 mm² / 6 mm²

TS 35, TS 32

261 mm / 109 mm

Tension-clamp connection

0.15 mm² / 1.5 mm²

0.15 mm² / 1.5 mm²

TS 35, TS 32

261 mm / 109 mm

Ordering data

Screw connection without switch

Screw connection with switch

Tension-clamp connection without switch

Tension-clamp connection with switch

Note

Type	Height	Order No.
RSM-16 FUS 1C0 S	75 mm	9445120000
RSM-16 FUS 1C0 Z	75 mm	9447120000

Relay 8693260000 RCL314024 24 V DC 1C0

Accessories**Note**

RSM – Isolated interfaces for digital output signals


RSM – Isolated interfaces for 16 digital output signals

Digital output relay interface for transmitting electrical signals between the PLC and the field via pre-wired cables of Weidmüller's universal system.

- Input/output reinforced insulation (basic between contacts)
- Positive switching

RSM-16 FOR 1CO

RCL relays, 1 CO contact and switch

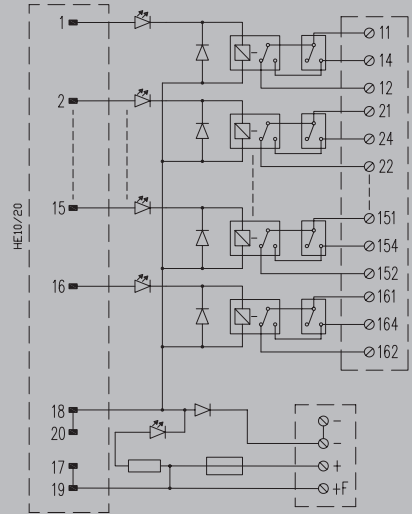

Technical data

Connection data and functionality	
Connection on control side	
Number of poles (control side)	
Relay type	
LED status display per relay	
LED status of the supply voltage	
Fuse per relay	
Power supply fuse	
Nominal input data	
Input voltage	
Input current	
Operating voltage (supply)	
Operating current (supply)	
Nominal output data	
Contact material	
Operating voltage	
Max. AC continuous current	
Minimum contact current	
Minimum contact voltage	
Mechanical service life	
General data	
Ambient temperature (operational)	
Storage temperature	
Approvals	
Insulation coordination (EN 50178)	
Rated input insulation voltage	
Rated output insulation voltage	
Overvoltage category input/output	
Overvoltage category output/output	
Pollution severity level	
Pulse voltage test (1,2/50µs)	
Insulation test voltage	
Clearance input/output	
Dimensions	
Clamping range, min./max. (field)	
Clamping range, min./max. (supply)	
Mounting rail	
Length x width	
Note	

Connector according IEC60603-13/DIN41651	
20-pole plug	
RCL	
green	
yellow	
No	
3.15 A	
24 V DC ± 10%	
17 mA	
24 V DC ± 10%	
2 A	
AgNi 90/10	
250 V AC	
2 A	
0.01 A	
10 V	
3 x 10 ⁷ switching cycles	
-25...40°C	
-40...60 °C	
CE; EAC	
< 50 V AC	
< 250 V AC	
III	
II	
2	
6 kV	
1.2 kVAC	
≥ 5.5 mm	
Screw connection	
0.13 mm ² / 6 mm ²	
0.13 mm ² / 6 mm ²	
TS 35, TS 32	
263 mm / 109 mm	

Ordering data

	Screw connection without switch
	Screw connection with switch
	Tension-clamp connection without switch
	Tension-clamp connection with switch
Note	

Type	Height	Order No.
RSM-16 FOR 1CO S	75 mm	9445140000

Accessories

Note

Relay 8693260000 RCL314024 24 V DC 1CO
--


RSM – Isolated interfaces for 16 digital output signals

Digital output relay interface for transmitting electrical signals between the PLC and the field via pre-wired cables of Weidmüller's universal system.

- Input/output reinforced insulation (basic between contacts)
- Positive switching

RSM-16 PLC I 1CO 2H

2 ribbon connectors for redundancy and disconnecter

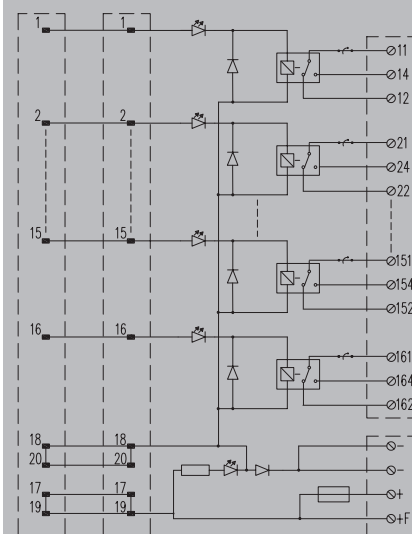

Technical data

Connection data and functionality

Connection on control side
Number of poles (control side)
Relay type
LED status display per relay
LED status of the supply voltage
Fuse per relay
Power supply fuse

Nominal input data

Input voltage
Input current
Operating voltage (supply)
Operating current (supply)

Nominal output data

Contact material
Operating voltage
Max. AC continuous current
Minimum contact current
Minimum contact voltage
Mechanical service life

General data

Ambient temperature (operational)
Storage temperature
Approvals

Insulation coordination (EN 50178)

Rated input insulation voltage
Rated output insulation voltage
Overvoltage category input/output
Overvoltage category output/output
Pollution severity level
Pulse voltage test (1,2/50µs)
Insulation test voltage
Clearance input/output

Dimensions

Clamping range, min./max. (field)
Clamping range, min./max. (supply)
Mounting rail
Length x width

Note

Connector according IEC60603-13/DIN41651

20-pole
RCL
green
yellow
No
3.15 A

24 V DC $\pm$ 10%
17 mA
24 V DC $\pm$ 10%
2 A

AgNi 90/10
250 V AC
2 A
0.01 A
12 V
3 x 10⁷ switching cycles

-25...50°C
-40...60 °C
CE; EAC

< 50 V AC
< 250 V AC
III
II
2

6 kV
1.2 kVAC
 $\geq$ 5.5 mm

Screw connection

0.13 mm² / 6 mm²
0.13 mm² / 6 mm²
TS 35, TS 32
259 mm / 109 mm

Ordering data

Screw connection without switch
Screw connection with switch
Tension-clamp connection without switch
Tension-clamp connection with switch

Note

Accessories

Note

Relay 8693260000 RCL314024 24 V DC 1CO

RSM – Isolated interfaces for digital output signals


RSM – Isolated interfaces for 16 digital output signals

Digital output relay interface for transmitting electrical signals between the PLC and the field via pre-wired cables of Weidmüller's universal system.

- Input/output reinforced insulation (basic between contacts)
- Positive switching

RSM-16 24 V DC 1NO + C

RCL relays (arranged in 1 rows) with 1 NO contact



Technical data

Connection data and functionality	
Connection on control side	
Number of poles (control side)	
Relay type	
LED status display per relay	
LED status of the supply voltage	
Fuse per relay	
Power supply fuse	
Nominal input data	
Input voltage	
Input current	
Operating voltage (supply)	
Operating current (supply)	
Nominal output data	
Contact material	
Operating voltage	
Max. AC continuous current	
Minimum contact current	
Minimum contact voltage	
Mechanical service life	
General data	
Ambient temperature (operational)	
Storage temperature	
Approvals	
Insulation coordination (EN 50178)	
Rated input insulation voltage	
Rated output insulation voltage	
Overvoltage category input/output	
Overvoltage category output/output	
Pollution severity level	
Pulse voltage test (1,2/50µs)	
Insulation test voltage	
Clearance input/output	
Dimensions	
Clamping range, min./max. (field)	
Clamping range, min./max. (supply)	
Mounting rail	
Length x width	
Note	

LP 5.08 + Connector according IEC60603-13/DIN41651 20 poles	
20-pole plug	
RCL	
green	
yellow	
No	
No	
24 V DC ± 10%	
16.7 mA	
24 V DC ± 10%	
1 A	
AgNi 90/10	
250 V AC	
6 A	
0.1 A	
5 V	
3 x 10 ⁷ switching cycles	
-25...50°C	
-40...60 °C	
CE; EAC	
< 50 V AC	
250 V AC	
III	
II	
2	
6 kV	
1.2 kVAC	
≥ 5.5 mm	
Screw connection	PUSH IN connection
0.13 mm ² / 6 mm ²	0.12 mm ² / 2.5 mm ²
0.13 mm ² / 6 mm ²	0.12 mm ² / 2.5 mm ²
TS 32, TS 35	TS 32, TS 35
250 mm / 87 mm	250 mm / 87 mm

Ordering data

	Screw connection without switch
	PUSH IN connection without switch


Type	Height	Order No.
RSM-16 24VDC 1NO + C S	62 mm	1448450000
RSM-16 24VDC 1NO + C Z	62 mm	1448470000

Note

Accessories

Note

Relay 8693260000 RCL314024 24 V DC 1CO
--

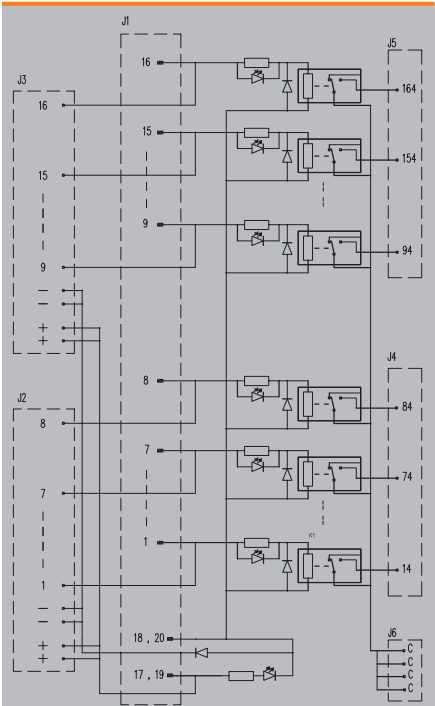


RSM – Isolated interfaces for 16 digital output signals

Digital output relay interface for transmitting electrical signals between the PLC and the field via pre-wired cables of Weidmüller's universal system.

- Input/output reinforced insulation (basic between contacts)
- Positive switching

RSM-16 24 V+ BASE

RCL relays (arranged in 1 rows) without relays or SSR's

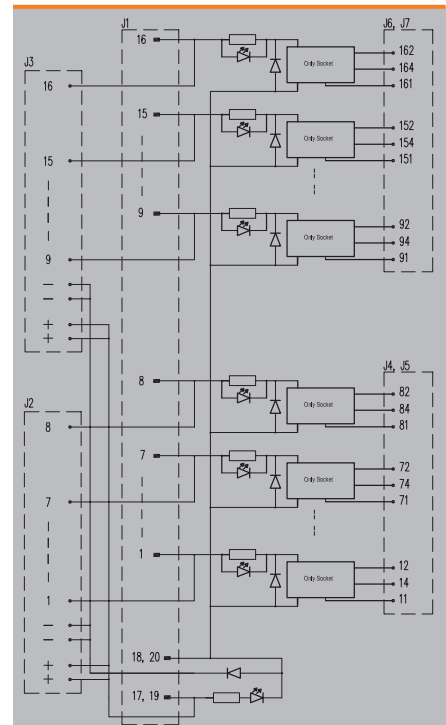

Technical data

Connection data and functionality

Connection on control side
Number of poles (control side)
Relay type
LED status display per relay
LED status of the supply voltage
Fuse per relay
Power supply fuse

Nominal input data

Input voltage
Input current
Operating voltage (supply)
Operating current (supply)

Nominal output data

Contact material
Operating voltage
Max. AC continuous current
Minimum contact current
Minimum contact voltage
Mechanical service life

General data

Ambient temperature (operational)
Storage temperature
Approvals

Insulation coordination (EN 50178)

Rated input insulation voltage
Rated output insulation voltage
Overvoltage category input/output
Overvoltage category output/output
Pollution severity level
Pulse voltage test (1,2/50μs)
Insulation test voltage
Clearance input/output

Dimensions

Clamping range, min./max. (field)
Clamping range, min./max. (supply)
Mounting rail
Length x width

Note

LP 5.08 + Connector according IEC60603-13/DIN41651 20 poles
20-pole plug
RCL
green
yellow
No
No

24 V DC ± 10%

24 V DC ± 10%

1 A

AgNi 90/10

250 V AC

6 A

0.1 A

5 V

3 x 10⁷ switching cycles

-25...50°C

-40...60 °C

CE; EAC

< 50 V AC

250 V AC

III

II

2

6 kV

1.2 kVAC

≥ 5.5 mm

Screw connection

0.13 mm² / 6 mm²

0.13 mm² / 6 mm²

TS 32, TS 35

259 mm / 87 mm

PUSH IN connection

0.12 mm² / 2.5 mm²

0.12 mm² / 2.5 mm²

TS 32, TS 35

259 mm / 87 mm

Ordering data

Screw connection without switch
PUSH IN connection without switch

Type	Height	Order No.
RSM-16 24V+ BASE S	51 mm	1448480000
RSM-16 24V+ BASE Z	51 mm	1448490000

Note

Accessories

Note

Relay 8693260000 RCL314024 24 V DC 1C0; SSR 1132290000 24 V DC/max. 240 V AC 1 A; SSR 1132310000 24 V DC/0-24 V DC 3,5 A

RSM – Isolated interfaces for digital output signals

RSM – Isolated interfaces for 16 digital output signals

Digital output relay interface for transmitting electrical signals between the PLC and the field via pre-wired cables of Weidmüller's universal system.

- Input/output reinforced insulation (basic between contacts)
- Negative switching

RSMS-16H 24V- 1C0

6 mm relay with 1 C0 contact and without switch



Technical data

Connection data and functionality

Connection on control side
Number of poles (control side)
Relay type
LED status display per relay
LED status of the supply voltage
Fuse per relay
Power supply fuse

Nominal input data

Input voltage
Input current
Operating voltage (supply)
Operating current (supply)

Nominal output data

Contact material
Operating voltage
Max. AC continuous current
Minimum contact current
Minimum contact voltage
Mechanical service life

General data

Ambient temperature (operational)
Storage temperature
Approvals

Insulation coordination (EN 50178)

Rated input insulation voltage
Rated output insulation voltage
Overvoltage category input/output
Overvoltage category output/output
Pollution severity level
Pulse voltage test (1,2/50µs)
Insulation test voltage
Clearance input/output

Dimensions

Clamping range, min./max. (field)
Clamping range, min./max. (supply)
Mounting rail
Length x width

Note

Connector according IEC60603-13/DIN41651
20-pole plug
RSS
green
yellow
No
No

24 V DC $\pm$ 10%
7.1 mA
24 V DC $\pm$ 10%
1 A

AgNi 90/10
250 V AC
4.5 A
100 mA
5 V
5 x 10⁶ switching cycles

-25...50°C
-40...60°C
CE; EAC

< 50 V AC
250 V AC
III
II
2
6 kV
1.2 kVAC
 $\geq$ 5.5 mm

Screw connection

0.13 mm² / 6 mm²
0.13 mm² / 6 mm²
TS 32, TS 35
112 mm / 109 mm

Tension-clamp connection

0.13 mm² / 2.5 mm²
0.13 mm² / 2.5 mm²
TS 32, TS 35
112 mm / 109 mm

Ordering data

Screw connection without switch
Tension-clamp connection without switch


Note

Accessories

Note

Type	Height	Order No.
RSMS-16H 24V- 1C0 S	85 mm	1457310000
RSMS-16H 24V- 1C0 Z	76 mm	1457330000

Relay 4060120000 RSS 24 V DC 1C0

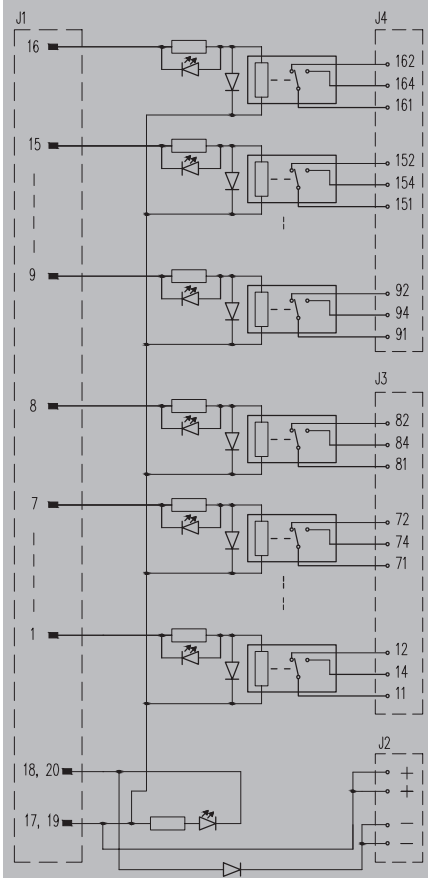


RSM – Isolated interfaces for 16 digital output signals

Digital output relay interface for transmitting electrical signals between the PLC and the field via pre-wired cables of Weidmüller's universal system.

- Input/output reinforced insulation (basic between contacts)
- Negative switching

RSM-16 24V- 1CO

RCL relays (arranged in 1 rows) with 1 CO contact

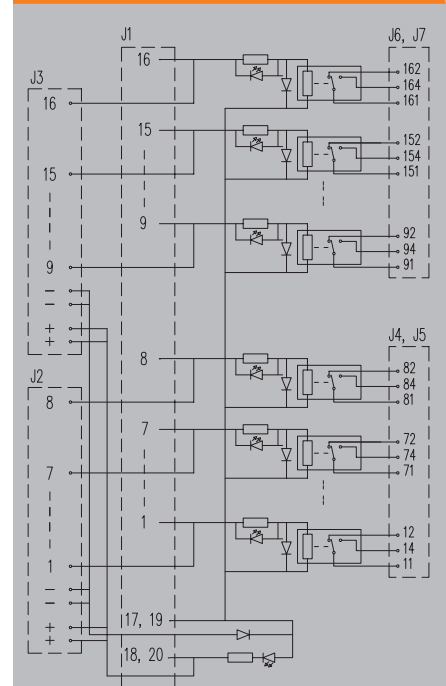

Technical data

Connection data and functionality

Connection on control side
Number of poles (control side)
Relay type
LED status display per relay
LED status of the supply voltage
Fuse per relay
Power supply fuse

Nominal input data

Input voltage
Input current
Operating voltage (supply)
Operating current (supply)

Nominal output data

Contact material
Operating voltage
Max. AC continuous current
Minimum contact current
Minimum contact voltage
Mechanical service life

General data

Ambient temperature (operational)
Storage temperature
Approvals

Insulation coordination (EN 50178)

Rated input insulation voltage
Rated output insulation voltage
Overvoltage category input/output
Overvoltage category output/output
Pollution severity level
Pulse voltage test (1,2/50µs)
Insulation test voltage
Clearance input/output

Dimensions

Clamping range, min./max. (field)
Clamping range, min./max. (supply)
Mounting rail
Length x width

Note

Connector according IEC60603-13/DIN41651
20-pole plug
RCL
green
yellow
No
No

24 V DC $\pm$ 10%
16.7 mA
24 V DC $\pm$ 10%
1 A

AgNi 90/10
250 V AC
6 A
0.1 A
5 V
30 x 10⁶ switching cycles

-25...50°C
-40...60°C
CE; EAC

< 50 V AC
250 V AC
III
II
2
6 kV
1.2 kVAC
 $\geq$ 5.5 mm

Screw connection	PUSH IN connection
0.13 mm ² / 6 mm ²	0.12 mm ² / 2.5 mm ²
0.13 mm ² / 6 mm ²	0.12 mm ² / 2.5 mm ²
TS 32, TS 35	TS 32, TS 35
259 mm / 87 mm	259 mm / 87 mm

Ordering data

Screw connection without switch
PUSH IN connection without switch

Type	Height	Order No.
RSM-16 24V- 1CO S	66 mm	1448290000
RSM-16 24V- 1CO Z	66 mm	1448310000

Note

Accessories

Note

Relay 8693260000 RCL314024 24 V DC 1CO

RSM – Isolated interfaces for digital output signals

RSM – Isolated interfaces for 16 digital output signals

Digital output relay interface for transmitting electrical signals between the PLC and the field via pre-wired cables of Weidmüller's universal system.

- Input/output reinforced insulation (basic between contacts)
- Negative switching

RSM-16 24V- 2CO

RCL relays (arranged in 1 rows) with 2 CO contact



Technical data

Connection data and functionality	
Connection on control side	
Number of poles (control side)	
Relay type	
LED status display per relay	
LED status of the supply voltage	
Fuse per relay	
Power supply fuse	
Nominal input data	
Input voltage	
Input current	
Operating voltage (supply)	
Operating current (supply)	
Nominal output data	
Contact material	
Operating voltage	
Max. AC continuous current	
Minimum contact current	
Minimum contact voltage	
Mechanical service life	
General data	
Ambient temperature (operational)	
Storage temperature	
Approvals	
Insulation coordination (EN 50178)	
Rated input insulation voltage	
Rated output insulation voltage	
Overvoltage category input/output	
Overvoltage category output/output	
Pollution severity level	
Pulse voltage test (1,2/50µs)	
Insulation test voltage	
Clearance input/output	
Dimensions	
Clamping range, min./max. (field)	
Clamping range, min./max. (supply)	
Mounting rail	
Length x width	
Note	

Connector according IEC60603-13/DIN41651	
20-pole plug	
RCL	
green	
yellow	
No	
No	
24 V DC ± 10%	
16.7 mA	
24 V DC ± 10%	
1 A	
AgNi 90/10	
250 V AC	
5 A	
0.1 A	
5 V	
30 x 10 ⁶ switching cycles	
-25...50°C	
-40...60 °C	
CE; EAC	
< 50 V AC	
250 V AC	
III	
III	
2	
6 kV	
1.2 kVAC	
≥ 5.5 mm	
Screw connection	Tension-clamp connection
0.13 mm ² / 6 mm ²	0.13 mm ² / 2.5 mm ²
0.13 mm ² / 6 mm ²	0.13 mm ² / 2.5 mm ²
TS 32, TS 35	TS 32, TS 35
290 mm / 109 mm	290 mm / 109 mm

Ordering data

	Screw connection without switch
	Tension-clamp connection without switch


Type	Height	Order No.
RSM-16 24V- 2CO S	71 mm	1449220000
RSM-16 24V- 2CO Z	66 mm	1449250000

Note

Accessories

Note

Relay 4058570000 RCL424024 24 V DC 2CO
--

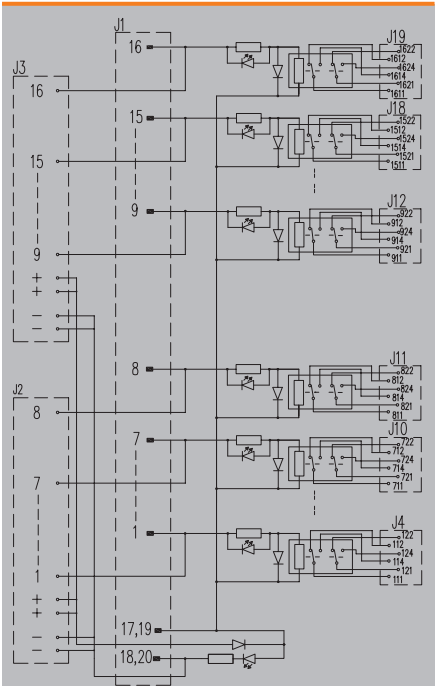

Dedicated solution for Honeywell C300

Dedicated solution for Honeywell C300	Honeywell C300 – General description	B.2
	Honeywell C300 – Selection guide	B.5
	Honeywell C300 – FTA C300 Input/output passive interface	B.6
	Honeywell C300 – FTA C300 Isolated interface per relay	B.11
	Honeywell C300 – Interconnection cables	B.13

Field Terminal Assembly (FTA)

New interfaces for the Honeywell Experion® PKS C300 controller

Weidmüller's new interfaces and pre-assembled cables allow you to wire up I/O cards from Honeywell's C300 controller quickly and simply in the field.

The IOTAs (Input Output Terminal Assemblies) are designed using Weidmüller PCB connectors and terminals. This design gives you the flexibility to connect directly to the field cabling wire to wire or with a pre-assembled cable in combination with Weidmüller's FTAs. In comparison to traditional wire-to-wire cabling, the new Weidmüller FTAs and pre-cabling solution offer a highly efficient method of wiring between I/O modules and the field.

Concise wiring in the electrical cabinet is possible because multicore cables are used instead of individual wires. The cable harness can be delivered with double or single connectors and even with unterminated ends.

The housing provides easy handling as well as a safe, firm connection to the IOTA. It also allows you to use cables with large cross-sections.


Minimised wiring effort

Pluggable connectors and cables minimise the on site wiring effort.




A quicker and easier connection

Pre-assembled wiring harnesses join IOTA and FTA with a fast and easy connection free from errors.

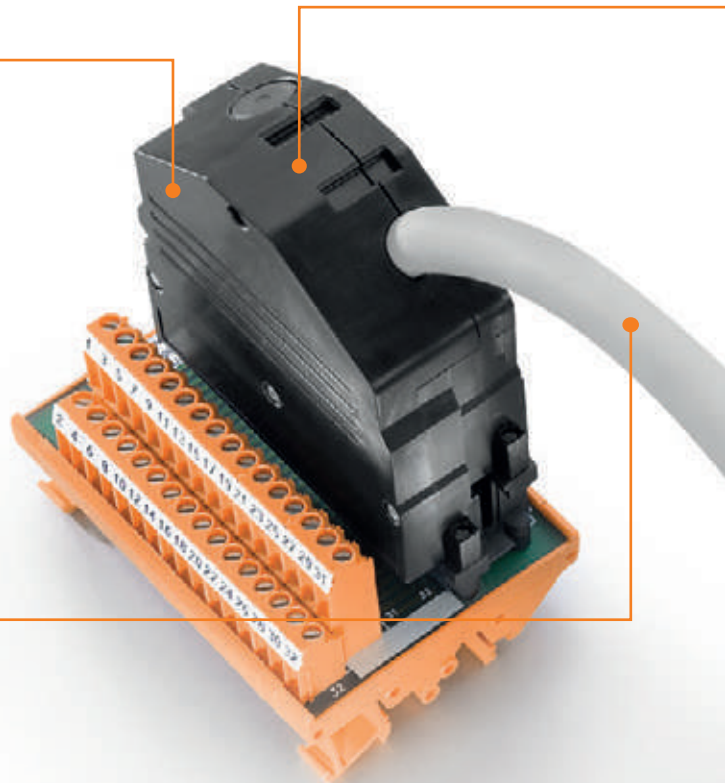

High current switching capability

The isolated digital output FTAs provide a high current switching capacity in a compact design.

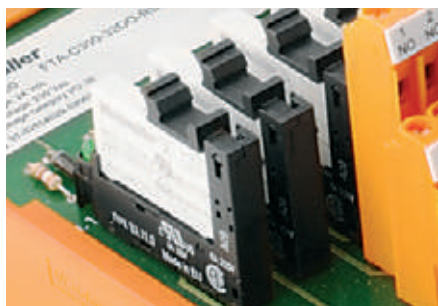**Clear identification**

The IOTA and FTA are delivered with the same Weidmüller connectors and the same orientation.

**Excellent flexibility**

The pre-assembled cables can be manufactured with different cross sections and in different lengths of up to 50 m.

**Wide range of Weidmüller interfaces (FTA)**

Weidmüller interfaces offer a large variety of functions such as LED indicators, insulators, relays or fuses for all the C300 I/O cards.



The following selection guides enable you to quickly and easily choose the correct products according to your application needs:

STEP 1: Choose the IOTA to be used.

STEP 2: In this column you can find the number and type of cable required to make the connection.

STEP 3: Choose the most suitable interface for the application.

Example: For CC-TDIL01 it's possible to select different options.

Solution 1: Pre-assembled cable C300-32B-320B (2 units)

Interface: 1221550000 (1 unit)

Solution 2: Pre-assembled cable C300-32B-320B (2 units)

Interface: 1222980000 (2 units)

Selection Guide for pre-assembled cables and FTA for Honeywell C300 IOTA's

STEP 1		STEP 2		STEP 3															
Honeywell IOTA		Pre-assembled cables		FTA (Weidmüller Interfaces)															
Kind of Card	Card	Cable Type	Units / IOTA	Channels	Connection	1 LED per channel	Disconnect + Test points	Fuse per channel	External power supply connector	Isolation	Units / IOTA	Order No.	Type	Page					
32 DI	CC-TDIL01 CC-TDIL11	C300-32B-320B (Premium) or PAC-C300-3232 (Basic)	2	32					Yes		1	1221550000	FTA-C300-32DIOHV-S	B.6					
									Yes		1	1222940000	FTA-C300-32DILD-S	B.6					
									Yes	Relay Gold	1	1312040000	FTA-C300-32DI-24VDC-S	B.11					
				16					Yes		1	1221560000	FTA-C300-32DIOHV-Z	B.6					
									Yes		1	1222950000	FTA-C300-32DILD-Z	B.6					
									No		2	1222980000	FTA-C300-16AO-SH-S	B.9					
32 DI High voltage	CC-TDI110 CC-TDI120 CC-TDI220 CC-TDI230	C300-32B-320B (Premium) or PAC-C300-3232 (Basic)	2	32					Yes		1	1221550000	FTA-C300-32DIOHV-S	B.6					
									Yes		1	1221560000	FTA-C300-32DIOHV-Z	B.6					
									No		2	1222980000	FTA-C300-16AO-SH-S	B.9					
				16					No		2	1222990000	FTA-C300-16AO-SH-Z	B.9					
									No		2	1223010000	FTA-C300-16AO-SH-P	B.9					
									No		2	1223010000	FTA-C300-16AO-SH-P	B.9					
32 DO	CC-TDOB01 CC-TDOB11	C300-32B-320B (Premium) or PAC-C300-3232 (Basic)	2	32					Yes		1	1221550000	FTA-C300-32DIOHV-S	B.6					
									Yes		1	1221590000	FTA-C300-32DD-LD-S	B.7					
									Yes	Relay 6A	1	1246910000	FTA-C300-32DD-FUSE-S	B.7					
									Yes		1	1221570000	FTA-C300-32DD-SLIM-S	B.12					
									Yes		1	1221560000	FTA-C300-32DIOHV-Z	B.6					
									Yes	Relay 6A	1	1221580000	FTA-C300-32DD-SLIM-Z	B.12					
				16					No		2	1222980000	FTA-C300-16IO-SH-S	B.9					
									No		2	1223020000	FTA-C300-16AO-TEST-S	B.9					
									No		2	1222990000	FTA-C300-16AO-SH-Z	B.9					
									No		2	1223030000	FTA-C300-16AO-TEST-Z	B.9					
									No		2	2000020000	FTA-C300-16AO-TP-Z	B.10					
									No		2	1223010000	FTA-C300-16AO-SH-P	B.9					
					16 AO	CC-TA0X01 CC-TA0X11 CC-TA0N01 CC-TA0N11	C300-32B-320B (Premium) or PAC-C300-3232 (Basic)	1	16					No		1	1222980000	FTA-C300-16AO-SH-S	B.9
														No		1	1223020000	FTA-C300-16AO-TEST-S	B.9
				No							1	1222990000	FTA-C300-16AO-SH-Z	B.9					
				No							1	1223030000	FTA-C300-16AO-TEST-Z	B.9					
				No							1	2000020000	FTA-C300-16AO-TP-Z	B.10					
				No							1	1223010000	FTA-C300-16AO-SH-P	B.9					
16 AI	CC-TAIX01 CC-TAIX11 CC-TAIX51 CC-TAIX61	C300-36B-324B (Premium) or PAC-C300-3636 (Basic)	1	16					No		1	1247120000	FTA-C300-16AI-SH-S	B.8					
									No		1	1247140000	FTA-C300-16AI-TEST-S	B.8					
									No		1	1247130000	FTA-C300-16AI-SH-Z	B.8					
									No		1	1247150000	FTA-C300-16AI-TEST-Z	B.8					
	CC-TAID01 CC-TAID01	C300-32B-320B + C300-16B-160B (Premium) or PAC-C300-3232 + PAC-C300-1616 (Basic)	1	16					No		1	1415220000	FTA-C300-16DAI-SH-S	B.10					
									No		1	1415230000	FTA-C300-16DAI-SH-Z	B.10					
Universal IO	CC-TUI001 CC-TUI011	C300-32B-320B (Premium) or PAC-C300-3232 (Basic)	2	16					No		2	1222980000	FTA-C300-16IO-SH-S	B.9					
									No		2	1222990000	FTA-C300-16AO-SH-Z	B.9					
									No		2	2000020000	FTA-C300-16AO-TP-Z	B.10					
									No		2	1223010000	FTA-C300-16AO-SH-P	B.9					

Note:

 = Screw connection
 = Tension clamp connection
 = Pluggable connection

Honeywell C300 - FTA C300 Input/output passive interface

Honeywell C300 - FTA C300


Input/output passive interface for digital cards

Passive interfaces (FTA) for connecting the Honeywell C300 digital IOTAs.

- Clearly labelled: same connector on the FTA and on the IOTA
- LED and fuse per channel (optional)
- Possibility of feeding the IOTA from the FTA (fuse protected)
- Screw or tension clamp connection



FTA-C300-32DI-LD

For: CC-TDIL01, CC-TDIL11

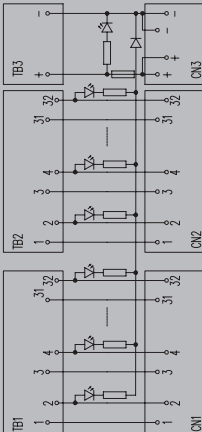

FTA-C300-32DIOHV

For: CC-TDIL01/11, CC-TD0801/11, CC-TDI110/120/220/230

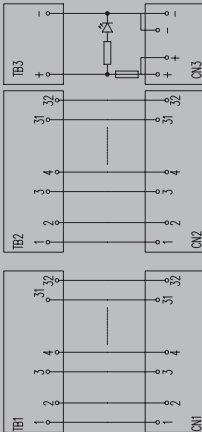

Technical data

Connection data and functionality	
Connection on control side	
LED status display per channel	
LED status of the supply voltage	
Fuse per channel	
Power supply fuse	
Type of test point	
Rated data	
Operating voltage	24 V DC ± 10%
Max. current per channel	1 A
Operating voltage (supply)	24 V DC ± 10%
General data	
Ambient temperature (operational)	-25...50°C
Storage temperature	-40...60 °C
Approvals	CE; EAC
Insulation coordination (EN 50178)	
Rated insulation voltage	< 50 V AC
Surge voltage category	III
Pollution severity level	2
Insulation test voltage	0.35 kVAC
Pulse voltage test (1,2/50µs)	0.8 kV

Dimensions	
Clamping range, min./max. (field)	
Clamping range, min./max. (supply)	
Mounting rail	
Length x width	
Note	

Ordering data

	Screw connection
	Tension-clamp connection

Note

Accessories

Note

SLDV-THR 5.08
green
yellow
No
630 mA
No
24 V DC ± 10%
1 A
24 V DC ± 10%
-25...50°C
-40...60 °C
CE; EAC
< 50 V AC
III
2
0.35 kVAC
0.8 kV

Screw connection	Tension-clamp connection
0.13 mm ² / 6 mm ²	0.13 mm ² / 2.5 mm ²
0.13 mm ² / 6 mm ²	0.13 mm ² / 2.5 mm ²
TS 32, TS 35	TS 32, TS 35
216 mm / 87 mm	216 mm / 87 mm

Type	Height	Order No.
FTA-C300-32DI-LD-S	65 mm	1222940000
FTA-C300-32DI-LD-Z	65 mm	1222950000

Note

Note

SLDV-THR 5.08
No
yellow
No
630 mA
No
≤ 250 V AC
1 A
24 V DC ± 10%
-25...50°C
-40...60 °C
CE; EAC
< 250 V AC
II
2
1.2 kVAC
2 kV

Screw connection	Tension-clamp connection
0.13 mm ² / 6 mm ²	0.13 mm ² / 2.5 mm ²
0.13 mm ² / 6 mm ²	0.13 mm ² / 2.5 mm ²
TS 32, TS 35	TS 32, TS 35
216 mm / 87 mm	216 mm / 87 mm

For digital outputs, replace the fuse as required (max. 5 A). TB3 can only used for 24 V C


Type	Height	Order No.
FTA-C300-32DIOHV-S	65 mm	1221550000
FTA-C300-32DIOHV-Z	65 mm	1221560000

Note

Note

FTA-C300-32D0-LD

For: CC-TD0B01, CC-TD0B11

**FTA-C300-32D0-FUSE**

For: CC-TD0B01, CC-TD0B11



SLDV-THR 5.08

green

yellow

No

5 A

No

24 V DC $\pm$ 10%

1 A

24 V DC $\pm$ 10%

-25...50°C

-40...60 °C

CE; EAC

< 50 V AC

III

2

0.35 kVAC

0.8 kV

Screw connection**Tension-clamp connection**0.13 mm² / 6 mm²0.13 mm² / 2.5 mm²0.13 mm² / 6 mm²0.13 mm² / 2.5 mm²

TS 32, TS 35

TS 32, TS 35

216 mm / 87 mm

216 mm / 87 mm

Type**Height****Order No.**

FTA-C300-32D0-LD-S

65 mm

1221590000

FTA-C300-32D0-LD-Z

65 mm

1221600000

SLDV-THR 5.08

No

yellow

500 mA

5 A

No

24 V DC $\pm$ 10%

1 A

24 V DC $\pm$ 10%

-25...50°C

-40...60 °C

CE; EAC

< 50 V AC

III

2

0.35 kVAC

0.8 kV

Screw connection**Tension-clamp connection**0.13 mm² / 6 mm²0.13 mm² / 2.5 mm²0.13 mm² / 6 mm²0.13 mm² / 2.5 mm²

TS 35 x 15

TS 35 x 15

217 mm / 133 mm

217 mm / 133 mm

Type**Height****Order No.**



FTA-C300-32D0-FUSE-S

95 mm

1246910000

FTA-C300-32D0-FUSE-Z

95 mm

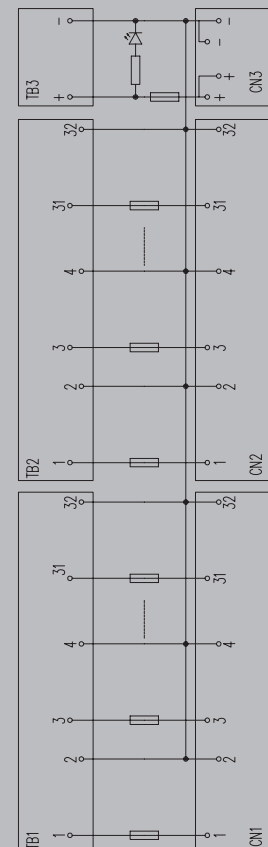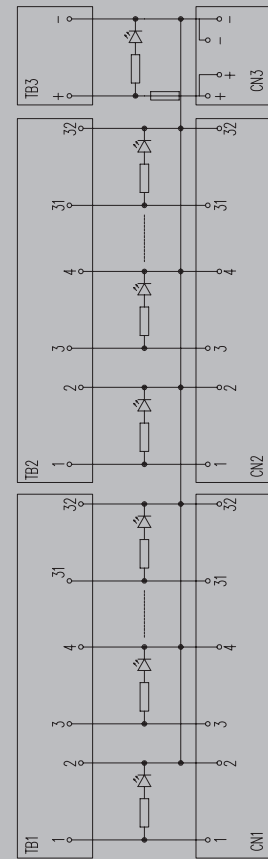1246920000

Honeywell C300 - FTA C300 Input/output passive interface

Honeywell C300 - FTA C300



Input/output passive interface for analogue and digital cards

Passive interfaces (FTA) for connecting the Honeywell C300 analogue IOTAs.

- Same connector and position on the FTA and on the IOTA
- 2 units can also be used for digital IOTAs
- Disconnecting plugs and test points (2 mm in diameter) for voltage and current measurements
- M4 connection for shielding


FTA-C300-16AI-SH

For: CC-TAIX01, CC-TAIX11, CC-TAIX51, CC-TAIX61

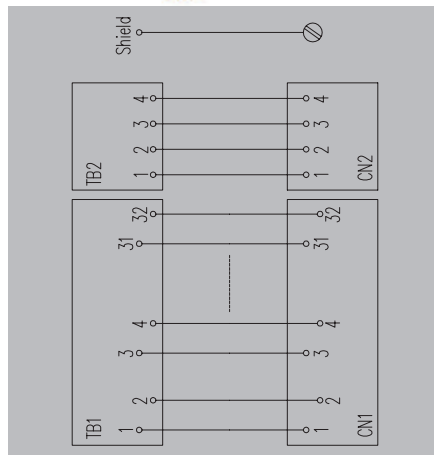

FTA-C300-16AI-TEST

For: CC-TAIX01, CC-TAIX11, CC-TAIX51, CC-TAIX61

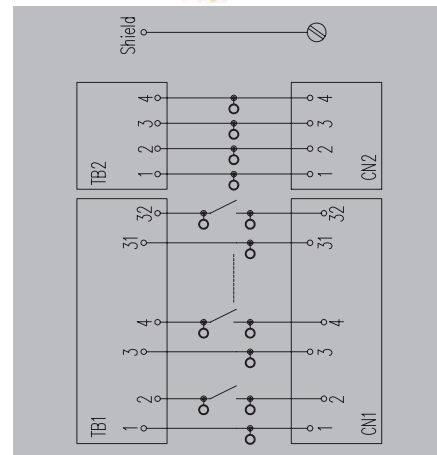

Technical data

Connection data and functionality	
Connection on control side	
LED status display per channel	
LED status of the supply voltage	
Fuse per channel	
Power supply fuse	
Type of test point	
Rated data	
Operating voltage	250 V AC / 350 V DC
Max. current per channel	1 A
Operating voltage (supply)	
General data	
Ambient temperature (operational)	-25...50°C
Storage temperature	-40...60 °C
Approvals	CE, EAC
Insulation coordination (EN 50178)	
Rated insulation voltage	< 250 V AC
Surge voltage category	II
Pollution severity level	2
Insulation test voltage	1.2 kVAC
Pulse voltage test (1,2/50µs)	2 kV

Dimensions	
Clamping range, min./max. (field)	
Clamping range, min./max. (supply)	
Mounting rail	
Length x width	
Note	

Ordering data

Type	Height	Order No.
FTA-C300-16AI-SH-S	56 mm	1247120000
FTA-C300-16AI-SH-Z	56 mm	1247130000

Note

Accessories

Note

Screw connection	Tension-clamp connection
0.13 mm ² / 6 mm ²	0.13 mm ² / 2.5 mm ²
0.13 mm ² / 6 mm ²	0.13 mm ² / 2.5 mm ²
TS 35, TS 32	TS 35, TS 32
135 mm / 70 mm	135 mm / 70 mm

Type	Height	Order No.
FTA-C300-16AI-SH-S	56 mm	1247120000
FTA-C300-16AI-SH-Z	56 mm	1247130000

Note

Note

Connection data and functionality	
Connection on control side	
LED status display per channel	
LED status of the supply voltage	
Fuse per channel	
Power supply fuse	
Type of test point	
Rated data	
Operating voltage	24 V DC ± 10%
Max. current per channel	1 A
Operating voltage (supply)	
General data	
Ambient temperature (operational)	-25...50°C
Storage temperature	-40...60 °C
Approvals	CE, EAC
Insulation coordination (EN 50178)	
Rated insulation voltage	≤ 50 V DC
Surge voltage category	III
Pollution severity level	2
Insulation test voltage	0.35 kVAC
Pulse voltage test (1,2/50µs)	0.8 kV

Screw connection	Tension-clamp connection
0.13 mm ² / 6 mm ²	0.13 mm ² / 2.5 mm ²
0.13 mm ² / 6 mm ²	0.13 mm ² / 2.5 mm ²
TS 35 x 15	TS 35 x 15
141 mm / 133 mm	141 mm / 133 mm

Type	Height	Order No.
FTA-C300-16AI-TEST-S	95 mm	1247140000
FTA-C300-16AI-TEST-Z	95 mm	1247150000


Note

Note

Test plug PS 2.0 MC 0310000000

FTA-C300-16A0-SH

CC-TDI 110/120/220/230/L01/L11, TDOB01/11, TAOX 01/11; TUI01/11

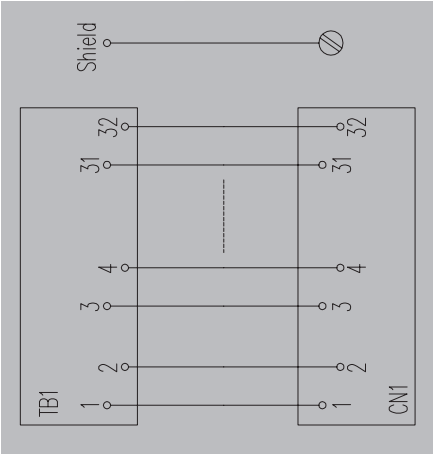

SLDV-THR 5.08
No
No
No
No
No
250 V AC / 350 V DC
1 A



-25...50°C
-40...60 °C
CE; EAC
< 250 V AC
II
2
1.2 kVAC
2 kV

Screw connection	Tension-clamp connection
0.13 mm² / 6 mm²	0.13 mm² / 2.5 mm²
0.13 mm² / 6 mm²	0.13 mm² / 2.5 mm²
TS 35, TS 32	TS 35, TS 32
105 mm / 70 mm	105 mm / 70 mm
The power connector is not supplied in the interface for digital cards	

Type	Height	Order No.
FTA-C300-16A0-SH-S	56 mm	1222980000
FTA-C300-16A0-SH-Z	56 mm	1222990000
FTA-C300-16A0-SH-P	56 mm	1223010000

FTA-C300-16A0-TEST

For: CC-TDOB01, CC-TDOB11, CC-TAOX01, CC-TAOX11, CC-TAON01, CC-TAON11

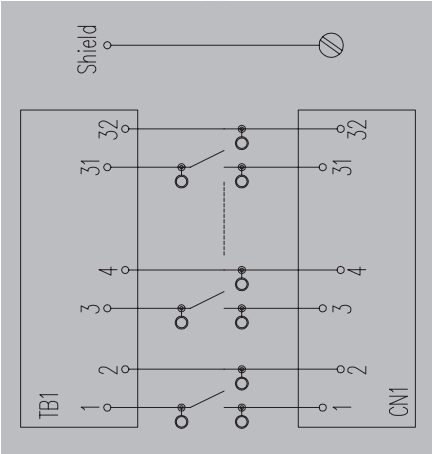

SLDV-THR 5.08
No
No
No
No
Diameter: 2 mm
24 V DC ± 10%
1 A

-25...50°C
-40...60 °C
CE; EAC
≤ 50 V DC
III
2
0.35 kVAC
0.8 kV

Screw connection	Tension-clamp connection
0.13 mm² / 6 mm²	0.13 mm² / 2.5 mm²
0.13 mm² / 6 mm²	0.13 mm² / 2.5 mm²
TS 35 x 15	TS 35 x 15
110 mm / 133 mm	110 mm / 133 mm
The power connector is not supplied in the interface for digital cards	

Type	Height	Order No.
FTA-C300-16A0-TEST-S	95 mm	1223020000
FTA-C300-16A0-TEST-Z	95 mm	1223030000

Test plug PS 2.0 MC 0310000000

Honeywell C300 - FTA C300 Input/output passive interface

Honeywell C300 - FTA C300


Input/output passive interface for analogue and digital cards

Passive interfaces (FTA) for connecting to Honeywell C300 analogue IOTAs.

- Same connector and position on the FTA and on the IOTA
- 2 units can also be used for digital IOTAs.
- Disconnectors and test points (2mm in diameter) for voltage and current measurements
- M4 connection for shielding


FTA-C300-16A0-TP

For: CC-TD0B01/11, CC-TA0X01/11, CC-TA0N01/11, CC-

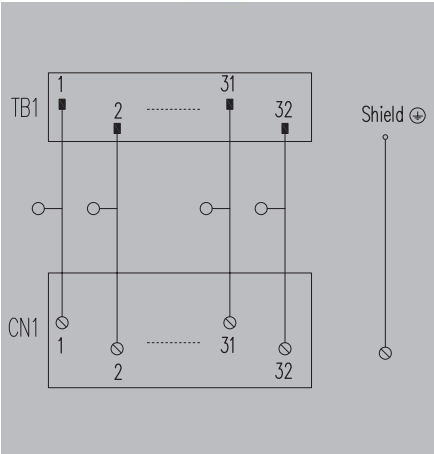

FTA-C300-16DAI-SH

For: CC-TAID01, CC-TAID11

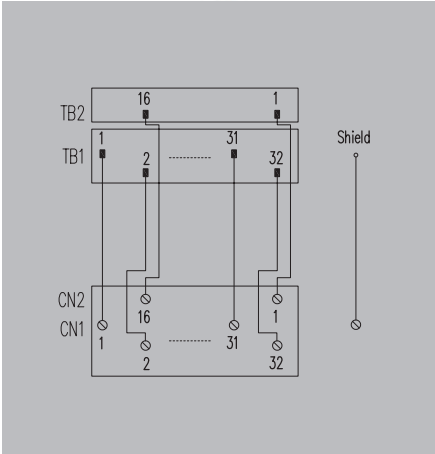

Technical data

Connection data and functionality	
Connection on control side	
LED status display per channel	
LED status of the supply voltage	
Fuse per channel	
Power supply fuse	
Type of test point	
Rated data	
Operating voltage	
Max. current per channel	
Operating voltage (supply)	
General data	
Ambient temperature (operational)	
Storage temperature	
Approvals	
Insulation coordination (EN 50178)	
Rated insulation voltage	
Surge voltage category	
Pollution severity level	
Insulation test voltage	
Pulse voltage test (1,2/50µs)	

SLDV-THR 5.08
No
No
No
No
No
Diameter: 2 mm
24 V DC ± 10%
1 A
-25...50°C
-40...60 °C
CE; EAC
≤ 50 V DC
III
2
0.35 kVAC
0.8 kV

SLDV-THR 5.08
No
No
No
No
No
24 V DC ± 10%
1.5 A
-25...50°C
-40...60 °C
CE; EAC
≤ 50 V DC
II
2
0.6 kVAC
1 kV

Dimensions
Clamping range, min./max. (field)
Clamping range, min./max. (supply)
Mounting rail
Length x width
Note

Tension-clamp connection
0.13 mm² / 2.5 mm²
0.13 mm² / 2.5 mm²
TS 32, TS 35
105 mm / 86 mm

Screw connection	Tension-clamp connection
0.13 mm² / 6 mm²	0.13 mm² / 2.5 mm²
0.13 mm² / 6 mm²	0.13 mm² / 2.5 mm²
TS 32, TS 35	TS 32, TS 35
105 mm / 109 mm	105 mm / 109 mm

Ordering data

Screw connection
Tension-clamp connection
Plug-in connection

Type	Height	Order No.
FTA-C300-16A0-TP-Z	66 mm	2000020000

Type	Height	Order No.
FTA-C300-16DAI-SH-S	85 mm	1415220000
FTA-C300-16DAI-SH-Z	80 mm	1415230000

Note

Accessories

Note

Test plug PS 2.0 MC 0310000000


Note

Honeywell C300 - FTA C300

Isolated input interface for digital cards

Passive interfaces (FTA) for connecting to Honeywell C300 analogue IOTAs.

- Clear identification: same connector and position on the FTA and on the IOTA
- Reinforced insulation at input/output (basic between contacts)
- Possibility of powering the IOTA from the FTA
- Screw or tension clamp connection



Technical data

Connection data and functionality

Connection on control side
Number of poles (control side)
Relay type
LED status display per relay
LED status of the supply voltage
Fuse per relay
Power supply fuse

Nominal input data

Input voltage
Input current
Operating voltage (supply)

Nominal output data

Contact material
Operating voltage
Max. DC continuous current

General data

Ambient temperature (operational)
Storage temperature
Approvals

Insulation coordination (EN 50178)

Rated input insulation voltage
Rated output insulation voltage
Overvoltage category input/output
Overvoltage category output/output
Pollution severity level
Pulse voltage test (1,2/50µs)
Insulation test voltage
Clearance input/output

Dimensions

Clamping range, min./max. (field)
Clamping range, min./max. (supply)
Mounting rail
Length x width

Note

Ordering data

Screw connection

Note

Accessories

Note

FTA-C300-32DI-24 V DC

For: CC-TDIL01, CC-TDIL11




SLDV-THR 5.08
64-pole
RSS
green
yellow
No
630 mA
24 V DC ± 10%
13 mA
24 V DC ± 10%
AgNi gold flashed
24 V DC ± 10%
0.1 A
-25...50°C
-40...60 °C
CE; EAC
< 50 V AC
< 50 V AC
III
III
2
1.5 kV
0.35 kVAC
≥ 6 mm

Screw connection

0.13 mm² / 6 mm²
0.13 mm² / 6 mm²
TS 35
244 mm / 131 mm

Type	Height	Order No.
FTA-C300-32DI-24VDC-S	65 mm	1312040000

Relay 4061590000 RSS 24 V DC 1CD AU

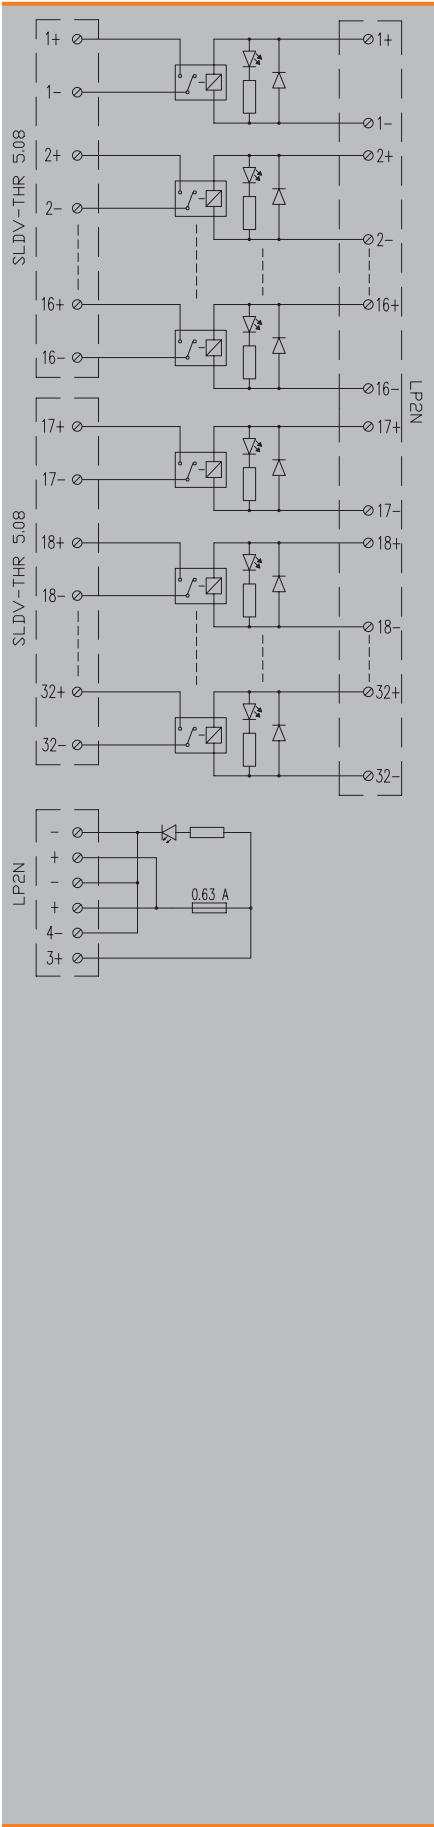

Honeywell C300 - FTA C300 Isolated interface per relay


Honeywell C300 - FTA C300

Isolated output interface for digital cards

- Passive interfaces (FTA) for connecting the Honeywell C300 analogue IOTAs.
- Clearly labelled: same connector and position on the FTA and on the IOTA
 - Input/output reinforced insulation (basic between contacts)
 - Possibility of powering the IOTA from the FTA
 - Screw or tension clamp connection

FTA-C300-32DO-RSLIM

For: CC-TD0B01, TD0B11

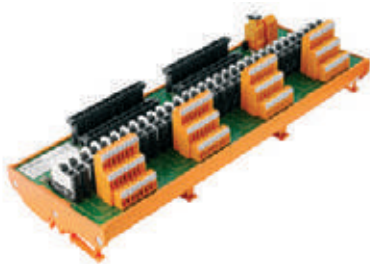

Technical data

Connection data and functionality	
Connection on control side	
Number of poles (control side)	
Relay type	
LED status display per relay	
LED status of the supply voltage	
Fuse per relay	
Power supply fuse	
Nominal supply data	
Input voltage	
Input current	
Operating voltage (supply)	
Nominal output data	
Contact material	
Operating voltage	
Max. AC continuous current	
General data	
Ambient temperature (operational)	
Storage temperature	
Approvals	
Insulation coordination (EN 50178)	
Rated input insulation voltage	
Rated output insulation voltage	
Overvoltage category input/output	
Overvoltage category output/output	
Pollution severity level	
Pulse voltage test (1,2/50µs)	
Insulation test voltage	
Clearance input/output	

SLDV-THR 5.08
64-pole
RSS
green
yellow
No
5 A
24 V DC ± 10%
13 mA
24 V DC ± 10%
AgNi 90/10
250 V
4 A
-25...50°C
-40...60 °C
CE; EAC
< 50 V AC
< 250 V AC
III
II
2
6 kV
1.2 kVAC
≥ 5.5 mm

Dimensions
Clamping range, min./max. (field)
Clamping range, min./max. (supply)
Mounting rail
Length x width
Note

Screw connection	Tension-clamp connection
0.13 mm ² / 6 mm ²	0.13 mm ² / 2.5 mm ²
0.13 mm ² / 6 mm ²	0.13 mm ² / 2.5 mm ²
TS 35 x 15	TS 35 x 15
368 mm / 133 mm	368 mm / 133 mm

Ordering data

	Screw connection
	Tension-clamp connection


Type	Height	Order No.
FTA-C300-32DO-RSLIM-S	95 mm	1221570000
FTA-C300-32DO-RSLIM-Z	95 mm	1221580000

Note

Accessories

Note

Relay 4060120000 RSS 24 V DC 1 CO

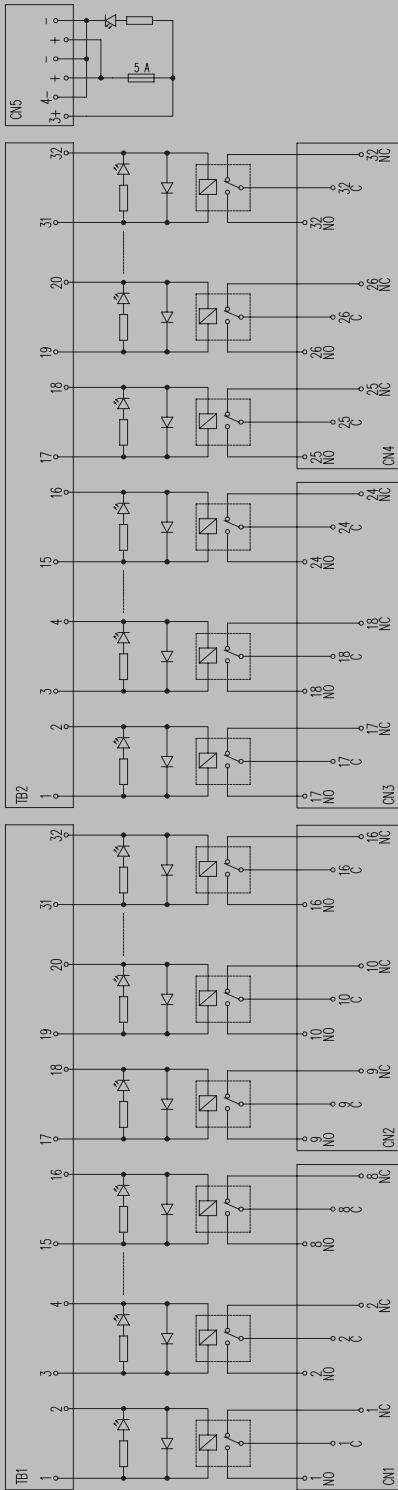

Honeywell C300 - Interconnection cables interconnection

Pre-assembled cables for connecting the CS300 cards to the Weidmüller interfaces. 2 ranges:

- Premium: With housing for the connector
- Basic: Without housing for the connector

Shielded Cable Li YCY

Colour code according DIN 47100

C300-32B-320B - Premium range

32 poles connector to 32 poles connector (with housing)



PAC-C300-3232 - Basic range

32 poles connector to 32 poles connector (without housing)



Technical data

Rated data

Capacity wire / shield

Capacity wire / wires

Nominal rating, control cable

Cable

Material

General data

Ambient temperature (operational)

Storage temperature

300 pF/m

300 pF/m

Cable Li YCY

PVC

-10...50°C

-10...60 °C

300 pF/m

300 pF/m

Cable Li YCY

PVC

-10...50°C

-10...60 °C

Note

Resistance value according to the wire cross-section. See www.weidmueller.com

Resistance value according to the wire cross-section. See www.weidmueller.com

Ordering data

Cross-section

0.14 mm²

0.25 mm²

0.34 mm²

0.50 mm²

Type	Qty.	Order No.
C300-32B-320B-2S-M14-1M	1	7789887010
C300-32B-320B-2S-M25-1M	1	7789828010
C300-32B-320B-2S-M34-1M	1	7789888010
C300-32B-320B-2S-M50-1M	1	7789838010

Type	Qty.	Order No.
PAC-C300-3232-14-1M	1	7789879010
PAC-C300-3232-25-1M	1	7789880010
PAC-C300-3232-34-1M	1	1498820010
PAC-C300-3232-50-1M	1	7789882010

Note

The last 3 digits of the cable code indicate its length. For example, if the code ends in 100, the cable would be 10 m long.

The last 3 digits of the cable code indicate its length. For example, if the code ends in 100, the cable would be 10 m long.

Accessories

Note

Honeywell C300 - Interconnection cables

Honeywell C300 - Interconnection cables
interconnection

Pre-assembled cables for connecting the CS300 cards to the Weidmüller interfaces. 2 ranges:

- Premium: With housing for the connector
- Basic: Without housing for the connector

Shielded Cable LI YCY
Colour code according DIN 47100

C300-36B-324B – Premium range

32 + 4 poles connector to 32+4 poles connector (with housing)



PAC-C300-3636 – Basic range

32+4 poles connector to 32+4 poles connector (without housing)



Technical data

Rated data
Capacity wire / shield
Capacity wire / wires
Nominal rating, control cable
Cable
Material
General data
Ambient temperature (operational)
Storage temperature

300 pF/m
300 pF/m
Cable LiYCY
PVC
-10...50°C
-10...60 °C

300 pF/m
300 pF/m
Cable LiYCY
PVC
-10...50°C
-10...60 °C

Note

Resistance value according to the wire cross-section. See www.weidmueller.com
--

Resistance value according to the wire cross-section. See www.weidmueller.com
--

Ordering data

Cross-section
0.14 mm²
0.25 mm²
0.34 mm²
0.50 mm²

Type	Qty.	Order No.
C300-36B-324B-2S-M14-1M	1	7789890010
C300-36B-324B-2S-M25-1M	1	7789829010
C300-36B-324B-2S-M34-1M	1	7789891010
C300-36B-324B-2S-M50-1M	1	7789892010

Type	Qty.	Order No.
PAC-C300-3636-14-1M	1	7789883010
PAC-C300-3636-25-1M	1	7789884010
PAC-C300-3636-34-1M	1	7789885010
PAC-C300-3636-50-1M	1	7789837010

Note

The last 3 digits of the cable code indicate its length. For example, if the code ends in 100, the cable would be 10 m long.
--

The last 3 digits of the cable code indicate its length. For example, if the code ends in 100, the cable would be 10 m long.
--

Accessories

Note

|--|

|--|

Honeywell C300 - Interconnection cables interconnection

Pre-assembled cables for connecting the CS300 cards to the Weidmüller interfaces. 2 ranges:

- Premium: With housing for the connector
- Basic: Without housing for the connector

Shielded Cable LI YCY

Colour code according DIN 47100

C300-32B-F

32 poles connector to ferrules (with housing)



PAC-C300-32-F

32 poles connector to ferrules (without housing)



Technical data

Rated data

Capacity wire / shield

Capacity wire / wires

Nominal rating, control cable

Cable

Material

General data

Ambient temperature (operational)

Storage temperature

300 pF/m

300 pF/m

Cable LiYCY

PVC

-10...50°C

-10...60 °C

300 pF/m

300 pF/m

Cable LiYCY

PVC

-10...50°C

-10...60 °C

Note

Ordering data

Cross-section

0.14 mm²

0.25 mm²

0.34 mm²

0.50 mm²

Type	Qty.	Order No.
C300-32B-F-2S-M14-1M	1	1373740010
C300-32B-F-2S-M25-1M	1	1349350010
C300-32B-F-2S-M34-1M	1	7789617010
C300-32B-F-2S-M50-1M	1	7789895010

Type	Qty.	Order No.
PAC-C300-32-F-14-1M	1	1373840010
PAC-C300-32-F-25-1M	1	1349330010
PAC-C300-32-F-34-1M	1	1373900010
PAC-C300-32-F-50-1M	1	1373940010

Note

The last 3 digits of the cable code indicate its length. For example, if the code ends in 100, the cable is 10 m long.

The last 3 digits of the cable code indicate its length. For example, if the code ends in 100, the cable is 10 m long.

Accessories

Note

Honeywell C300 - Interconnection cables

Honeywell C300 - Interconnection cables
interconnection

Pre-assembled cables for connecting the CS300 cards to the Weidmüller interfaces. 2 ranges:

- Premium: With housing for the connector
- Basic: Without housing for the connector

Shielded Cable LI YCY
Colour code according DIN 47100

C300-36B-F

32+4 poles connector to ferrules (with housing)



PAC-C300-36-F

32+4 poles connector to ferrules (without housing)



Technical data

Rated data
Capacity wire / shield
Capacity wire / wires
Nominal rating, control cable
Cable
Material
General data
Ambient temperature (operational)
Storage temperature

300 pF/m
300 pF/m
Cable LiYCY
PVC
-10...50°C
-10...60 °C

300 pF/m
300 pF/m
Cable LiYCY
PVC
-10...50°C
-10...60 °C

Note

Note

Note

Ordering data

Cross-section
0.14 mm²
0.25 mm²
0.34 mm²
0.50 mm²

Type	Qty.	Order No.
C300-36B-F-2S-M14-1M	1	1373750010
C300-36B-F-2S-M25-1M	1	1349370010
C300-36B-F-2S-M34-1M	1	1373780010
C300-36B-F-2S-M50-1M	1	1373820010

Type	Qty.	Order No.
PAC-C300-36-F-14-1M	1	1373850010
PAC-C300-36-F-25-1M	1	1349340010
PAC-C300-36-F-34-1M	1	1373910010
PAC-C300-36-F-50-1M	1	1373950010

Note

The last 3 digits of the cable code indicate its length. For example, if the code ends in 100, the cable is 10 m long.
--

The last 3 digits of the cable code indicate its length. For example, if the code ends in 100, the cable is 10 m long.
--

Accessories

Note

Note

Note

Honeywell C300 - Interconnection cables interconnection

Pre-assembled cables for connecting the CS300 cards to the Weidmüller interfaces. 2 ranges:

- Premium: With housing for the connector
- Basic: Without housing for the connector

Shielded Cable Li YCY

Colour code according DIN 47100

C300-16B-160B

16 poles connector to 16 poles connector (with housing)



PAC-C300-1616

16 poles connector to 16 poles connector (without housing)



Technical data

Rated data

Capacity wire / shield

Capacity wire / wires

Nominal rating, control cable

Cable

Material

General data

Ambient temperature (operational)

Storage temperature

300 pF/m

300 pF/m

Cable Li YCY

PVC

-10...50°C

-10...60 °C

300 pF/m

300 pF/m

Cable Li YCY

PVC

-10...50°C

-10...60 °C

Note

Ordering data

Cross-section

0.14 mm²

0.25 mm²

0.34 mm²

0.50 mm²

Type	Qty.	Order No.
C300-16B-160B-2S-M14-1M	1	1481680010
C300-16B-160B-2S-M25-1M	1	1481690010
C300-16B-160B-2S-M34-1M	1	1481710010
C300-16B-160B-2S-M50-1M	1	1481720010

Type	Qty.	Order No.
PAC-C300-1616-14-1M	1	1481590010
PAC-C300-1616-25-1M	1	1481610010
PAC-C300-1616-34-1M	1	1481620010
PAC-C300-1616-50-1M	1	1481630010

Note

The last 3 digits of the cable code indicate its length. For example, if the code ends in 100, the cable is 10 m long.

The last 3 digits of the cable code indicate its length. For example, if the code ends in 100, the cable is 10 m long.

Accessories

Note

Honeywell C300 - Interconnection cables

Honeywell C300 - Interconnection cables
interconnection

Pre-assembled cables for connecting the CS300 cards to the Weidmüller interfaces. 2 ranges:

- Premium: With housing for the connector
- Basic: Without housing for the connector

Shielded Cable LI YCY
Colour code according DIN 47100

C300-16B-F

16 poles connector to ferrules (with housing)



PAC-C300-16-F

16 poles connector to ferrules (without housing)



Technical data

Rated data
Capacity wire / shield
Capacity wire / wires
Nominal rating, control cable
Cable
Material
General data
Ambient temperature (operational)
Storage temperature

300 pF/m
300 pF/m
Cable LiYCY
PVC
-10...50°C
-10...60 °C

300 pF/m
300 pF/m
Cable LiYCY
PVC
-10...50°C
-10...60 °C

Note

Ordering data

Cross-section
0.14 mm²
0.25 mm²
0.34 mm²
0.50 mm²

Type	Qty.	Order No.
C300-16B-F-2S-M14-1M	1	1481730010
C300-16B-F-2S-M25-1M	1	1481740010
C300-16B-F-2S-M34-1M	1	1481750010
C300-16B-F-2S-M50-1M	1	1481760010

Type	Qty.	Order No.
PAC-C300-16-F-14-1M	1	1481640010
PAC-C300-16-F-25-1M	1	1481650010
PAC-C300-16-F-34-1M	1	1481660010
PAC-C300-16-F-50-1M	1	1481670010

Note

The last 3 digits of the cable code indicate its length. For example, if the code ends in 100, the cable is 10 m long.
--

The last 3 digits of the cable code indicate its length. For example, if the code ends in 100, the cable is 10 m long.
--

Accessories

Note

Note

Note

Honeywell C300 - Interconnection cables interconnection

Pre-assembled cables for connecting the CS300 cards to the Weidmüller interfaces. 2 ranges:

- Premium: With housing for the connector
- Basic: Without housing for the connector

Shielded Cable LI YCY

Colour code according DIN 47100

C300-32B-216B

32 poles connector to 2X16 poles connector (with housing)



PAC-C300-32-1616

32 poles connector to 2X16 poles connector (without housing)



Technical data

Rated data

Capacity wire / shield

Capacity wire / wires

Nominal rating, control cable

Cable

Material

General data

Ambient temperature (operational)

Storage temperature

300 pF/m

300 pF/m

Cable LiYCY

PVC

-10...50°C

-10...60 °C

300 pF/m

300 pF/m

Cable LiYCY

PVC

-10...50°C

-10...60 °C

Note

Ordering data

Cross-section

0.14 mm²

0.25 mm²

0.34 mm²

0.50 mm²

Type	Qty.	Order No.
C300-32B-216B-2S-M14-1M	1	1373730010
C300-32B-216B-2S-M25-1M	1	1373770010
C300-32B-216B-2S-M34-1M	1	7789886010
C300-32B-216B-2S-M50-1M	1	1373790010

Type	Qty.	Order No.
PAC-C300-32-1616-14-1M	1	1373830010
PAC-C300-32-1616-25-1M	1	1373880010
PAC-C300-32-1616-34-1M	1	7789893010
PAC-C300-32-1616-50-1M	1	1373920010

Note

The last 3 digits of the cable code indicate its length. For example, if the code ends in 100, the cable is 10 m long.

The last 3 digits of the cable code indicate its length. For example, if the code ends in 100, the cable is 10 m long.

Accessories

Note

Interface units for Yokogawa CS3000 and ProSafe

Interface units for Yokogawa CS3000 and ProSafe	Yokogawa CS3000 and ProSafe – General description	C.2
	Yokogawa CS3000 – Selection guide	C.5
	Yokogawa CS3000 – TBY Input/output interfaces for CS3000	C.6
	Yokogawa ProSafe – Selection guide	C.17
	Yokogawa ProSafe – TBY Input/output interfaces for ProSafe	C.18
	MIL cables	C.26

Interface units for Yokogawa CS3000 and ProSafe

Secure and fast connection between Distributed Control Systems and the field

C

The goal is to provide a simple and clean connection between sensors/actuators and the Yokogawa controllers. This is achieved by using our interface units in the marshalling cabinets. Let's connect.

The main goals of the Yokogawa CS3000 and Prosafe interfaces are to prevent cabling errors, save space in the electronics cabinet and save time and costs in the construction of electronics cabinets.

This is where our interface units for the Yokogawa CS3000 and ProSafe controllers score: the compact interfaces minimise cabling costs and offer significant benefits such as the regulated power supply with control relay.

If required we supply the components with a coating according to corrosion class G3.

These benefits and more will enable you to establish the optimum connection between field elements and input/output cards from Yokogawa. Let's connect



You are shaping the future of the process industry

Global competition and market dynamism are driving change in the process industry. New global strategies, mergers and takeovers, investments and spin-offs are all part of the change. Plant operators and manufacturers who ensure a higher standardisation of production processes are one step ahead of the market. The best conditions for efficient plant operation are secure connectivity and a cost- and space-saving connection when transmitting and converting signals.


Reliable connection

The interface units are provided with a screw or tension clamp connection on the field side and with compatible connectors to KS or AKB cables on the control side.




Wide temperature range

The interface can work in ambient temperatures ranging from -25 to +70 °C.



Numerous integral functions

Isolators, fuses with fault display, status LEDs: field sensors may be supplied with power within the individual modular terminal.

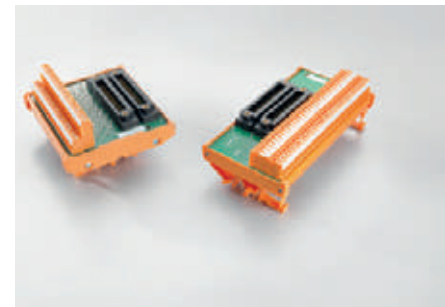


Wide range of interfaces

The range includes passive input/output interfaces for digital and analogue signals and isolated interfaces with relays incorporating a compact design.



Redundancy supply control

Up to two power supplies can be connected to the interface units for Yokogawa systems. If one of the power supplies falls below approx. 12 V an alarm is activated and the power supply LED is extinguished.

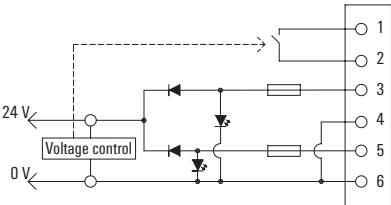

The following selection guides enable you to quickly and easily choose the correct products according to your application needs:

STEP 1: Choose the Yokogawa Card to be used.

STEP 2: Choose the most suitable interface for the application.

Example: For AAB841 it's possible to select different options:

* In screw: 1371470000, 1371600000, 1371640000

* In tension clamp: 1371500000, 1371610000, 1371650000

This is small selection of the most frequently used termination boards. Other termination boards are also available.

G3 termination boards can also be provided under demand.

Yokogawa CS3000 – Selection guide

STEP 1		STEP 2											
Yokogawa Card		TBY (Weidmüller Interfaces for Yokogawa)											
Kind of Card	Card	Kind of connector	Redundancy Power supply	Fuses per channel	Disconnect + Test points	Forks for components	Led channel	Led fuse	Relay	Type	Order No. Screw	Order No. Tension clamp	Page
8 analogue input/ 8 analogue output	AAB841	KS								TBY-C3-AIO-2KS	1371470000	1371500000	C.6
		KS								TBY-C3-AIO+2KS	1371600000	1371610000	C.8
		KS								TBY-C3-UNIV-SP-2KS	1371640000	1371650000	C.9
8 analogue inputs	AAI135	KS								TBY-C3-AIO-2KS	1371470000	1371500000	C.6
	AAP135	KS								TBY-C3-AIO+2KS	1371600000	1371610000	C.8
		KS								TBY-C3-UNIV-SP-2KS	1371640000	1371650000	C.9
16 analogue current input	AAI141 AAI143	KS								TBY-C3-AIO-2KS	1371470000	1371500000	C.6
		KS								TBY-C3-16AI-2KS	1371530000	1371550000	C.6
		KS								TBY-C3-AIO+2KS	1371600000	1371610000	C.8
		KS								TBY-C3-UNIV-SP-2KS	1371640000	1371650000	C.9
4 analogue current input/ 4 analogue current output	AAI835	KS								TBY-C3-AIO-2KS	1371470000	1371500000	C.6
		KS								TBY-C3-AIO+2KS	1371600000	1371610000	C.8
		KS								TBY-C3-UNIV-SP-2KS	1371640000	1371650000	C.9
8 analogue input/ 8 analogue output	AAI841	KS								TBY-C3-AIO-2KS	1371470000	1371500000	C.6
		KS								TBY-C3-AIO+2KS-Z	1371600000	1371610000	C.8
		KS								TBY-C3-UNIV-SP-2KS	1371640000	1371650000	C.9
16 analogue voltage input	AAV141 AAV142 AAV144	KS								TBY-C3-AIO-2KS	1371470000	1371500000	C.6
		KS								TBY-C3-16AIO-2KS	1371580000	1371590000	C.6
		KS								TBY-C3-AIO+2KS-Z	1371600000	1371610000	C.8
		KS								TBY-C3-UNIV-SP-2KS	1371640000	1371650000	C.9
16 analogue output	AAV542 AAV544 AAI543	KS								TBY-C3-AIO-2KS	1371470000	1371500000	C.6
		KS								TBY-C3-16AIO-2KS	1371580000	1371590000	C.6
		KS								TBY-C3-AIO+2KS	1371600000	1371610000	C.8
		KS								TBY-C3-UNIV-SP-2KS	1371640000	1371650000	C.9
16 RTD analogue input	AAR145	AKB								TBY-C3-UNIV-2KB	1384090000	1384080000	C.10
12 RTD input modules	AAR181	KS								TBY-C3-UNIV-SP-2KS	1371640000	1371650000	C.9
32 digital input	ADV151 ADV161 (Use 2 TBY per card)	AKB								TBY-C3-UNIV-2KB	1384090000	1384080000	C.10
		AKB	2 A							TBY-ADV151-PS-L-2KB	1384350000	1384340000	C.11
		AKB	2 A	100 mA						TBY-ADV151-PS-F-L-2KB	1397820000	1397830000	C.12
		AKB	2 A	100 mA					24 V DC	TBY-ADV151-24-PS-2KB	1384330000	1384320000	C.13
		AKB	2 A	100 mA					48 V DC	TBY-ADV151-48-PS-2KB	1384280000	1384250000	C.14
32 digital output	ADV551 ADV561 (Use 2 TBY per card)	AKB								TBY-C3-UNIV-2KB	1384090000	1384080000	C.10
		AKB	1 A						24 V DC	TBY-ADV551-CF-PS-2KB	1379500000	1379510000	C.15
Note:													

Yokogawa CS3000 – TBY Input/output interfaces for CS3000

TBY-CS3000 Input/output interfaces
for CS3000 analogue cards

Interface for 8 or 16 analogue signals (depend on marking)

- 2 KS connectors (40 poles) for redundancy
- Direct connection between the Yokogawa card and the field connectors.
- Basic modul also without marking available and markers as accessory for customer flexibility
- Complete modules with marking available
- Screw and tension clamp connection

TBY-C3-



Technical data

Connected to	
Connection to the card	
Connection data and functionality	
Connection on control side	
LED status display per channel	
LED status of the supply voltage	
Fuse per channel	
Power supply fuse	
Disconnection per channel	
Type of test point	
Rated data	
Operating voltage	
Max. current per channel	
Operating voltage (supply)	
Operating current (supply)	
General data	
Ambient temperature (operational)	
Storage temperature	
Insulation coordination (EN 50178)	
Rated insulation voltage	
Surge voltage category	
Pollution severity level	
Insulation test voltage	
Pulse voltage test (1,2/50µs)	
Dimensions	
Clamping range, min./max. (field)	
Clamping range, min./max. (supply)	
Mounting rail	
Length x width	
Note	

Ordering data

Terminal block for:	
	Analog signals without marking (S)
	Analog signals without marking (Z)
	AAI141, AAI143 (S)
	AAI141, AAI143 (Z)
	AAI543, AAV141, AAV142, AAV144, AAV542, AAV544 (S)
	AAI543, AAV141, AAV142, AAV144, AAV542, AAV544 (Z)
Note	


Accessories

	DEK for AAI141, AAI143 (S)
	DEK for AAV141, AAV142, AAV144, SAI543, AAV542, AAV544 (S)
	DEK for AAI841 (S)
	DEK for AAB841 (S)
	DEK for AAI135, AAP135 (S)
	DEK for AAI835 (S)
	KSW for AAI141, AAI143 (Z)
	KSW for AAV141, AAV142, AAV144, SAI543, AAV542, AAV544 (Z)
	KSW for AAI841 (Z)
	KSW for AAB841 (Z)
	KSW for AAI135, AAP135 (Z)
	KSW for AAI835 (Z)
Note	


AAB841, AAI135, AAI141, AAI143, AAI543, AAI841, AAI835, AAP135, AAV141, AAV142, AAV144, AAV542, AAV544	
2 x KS (40P)	
No	
No	
No	
No	
No	
No	
50 V AC / 70 V DC	
1 A	
50 V AC / 70 V DC	
1 A	
-25...70°C	
-40...85 °C	
< 50 V AC	
III	
2	
0.35 kVAC	
0.8 kV	
Screw connection	Tension-clamp connection
0.13 mm ² / 6 mm ²	0.13 mm ² / 2.5 mm ²
0.13 mm ² / 6 mm ²	0.13 mm ² / 2.5 mm ²
TS 32, TS 35	TS 32, TS 35
90 mm / 70 mm	90 mm / 70 mm

Type	Height	Order No.
TBY-C3-AIO-2KS-S	56 mm	1371470000
TBY-C3-AIO-2KS-Z	52 mm	1371500000
TBY-C3-16AI-2KS-S	56 mm	1371530000
TBY-C3-16AI-2KS-Z	52 mm	1371550000
TBY-C3-16AIO-2KS-S	56 mm	1371580000
TBY-C3-16AIO-2KS-Z	52 mm	1371590000
Picture shows article number 1371530000		
S (screw connection), Z (tension-clamp connection)		


Type	Units x TBY	Order No.
DEK 5 TB-V1	40	1379120000
DEK 5 TB-V2	40	1379110000
DEK 5 TB-V6	40	1390690000
DEK 5 TB-V7	40	1390680000
DEK 5 TB-V8	40	1388240000
DEK 5 TB-V9	40	1388250000
KSW 5 TB-V1	0.1	1390700000
KSW 5 TB-V2	0.1	1394320000
KSW 5 TB-V6	0.1	1394340000
KSW 5 TB-V7	0.1	1394350000
KSW 5 TB-V8	0.1	1394370000
KSW 5 TB-V9	0.1	1394380000
S (screw connection), Z (tension-clamp connection)		

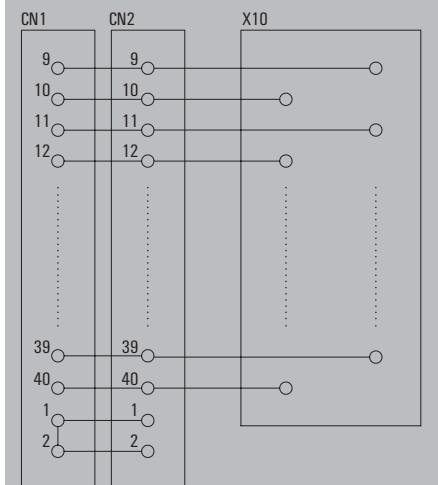


Schematic for 1371470000/1371500000

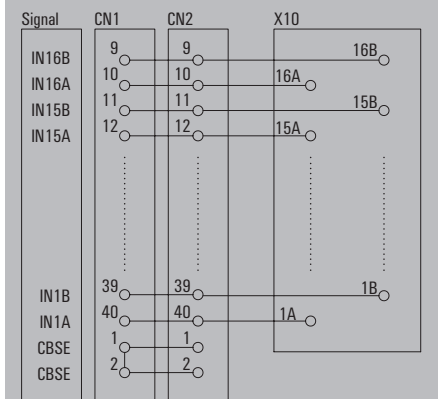


Schematic for 1371530000/1371550000 (AAI141, AAI143)

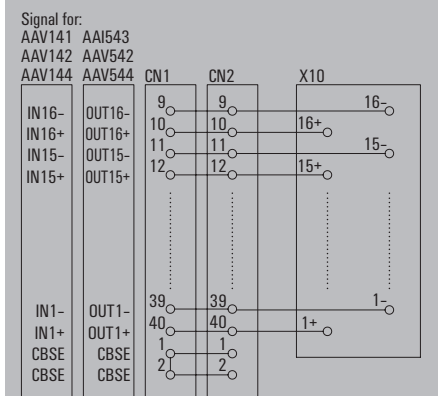Schematic for 1371580000/1371590000
(AAV141, AAV142, AAV144, AAI543, AAV542, AAV544)

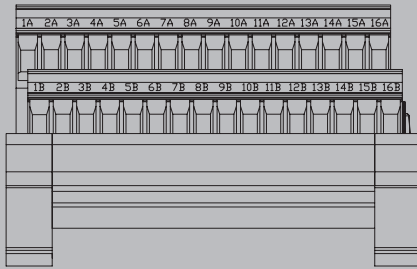


Field terminals view 1371530000 / 1371550000
(AAI141, AAI143)


Application note: With the markers showed as accesories,
is possible to configure the TBY for other cards

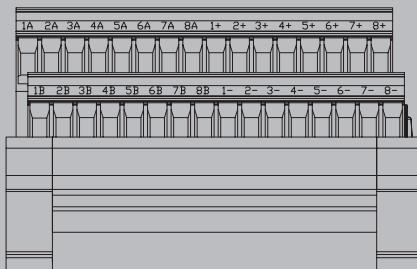


Connection for AAI841

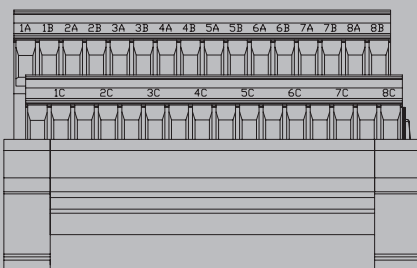


Connection for AAI135, AAP135

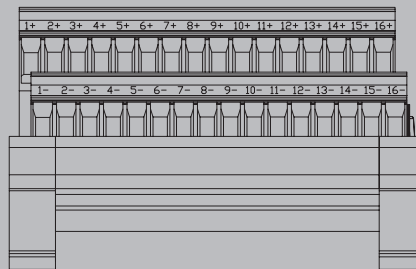

Field terminals view 1371580000 / 1371590000
(AAV141, AAV142, AAV144, AAI543, AAV542, AAV544)

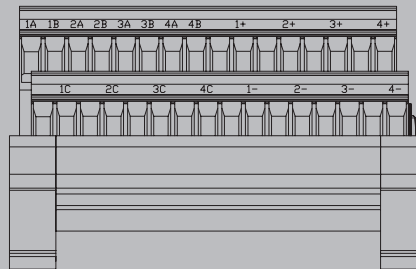

Connection for AAI835

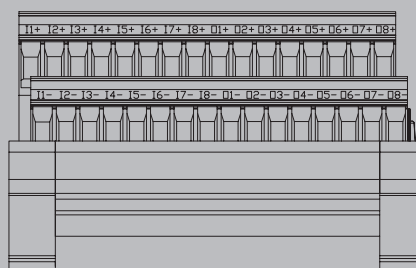

Connection for AAB841



Yokogawa CS3000 – TBY Input/output interfaces for CS3000

TBY-CS3000 Input/output interfaces
for CS3000 analogue cards

Interface for 8 or 16 analogue signals

- 2 KS connectors (40 poles) for redundancy
- Disconnecting plugs and test points (2 mm diameter) for voltage or current measurement.
- The TBY is delivered with the marking for AAI141, AAI143 and it's compatible with other analogue cards.
- Marker available as accessory.
- Screw and tension clamp connection

TBY-C3-AIO-I-2KS

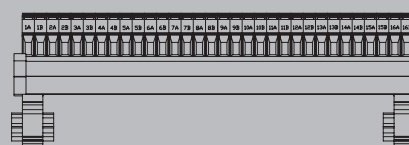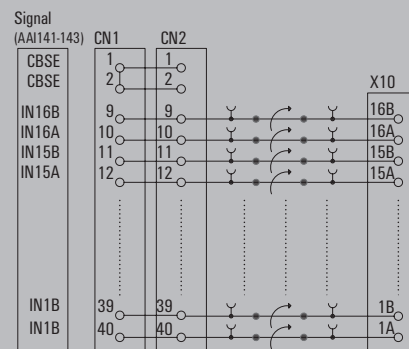


Connection for AAI141, AAI143


Application note: With the markers showed as accessories, it is possible to configure the TBY for other cards




Connection for AAV141, AAV142, AAV144, AAI543, AAV542, AAV544)

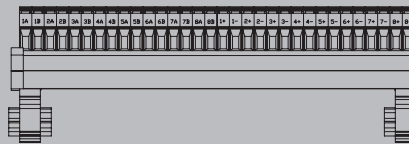


Connection for AAI841

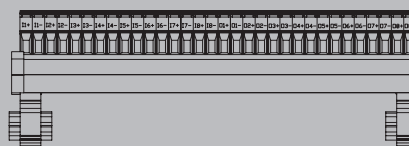

Connection for AAB841

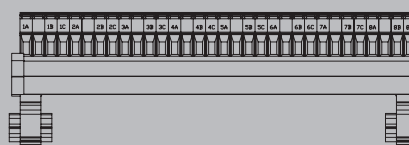

Connection for AAI135, AAP135

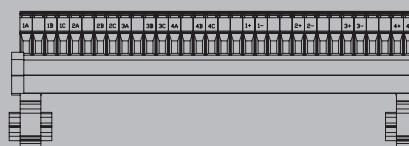

Connection for AAI835

Technical data

Connected to
Connection to the card
Connection data and functionality
Connection on control side
LED status display per channel
LED status of the supply voltage
Fuse per channel
Power supply fuse
Disconnection per channel
Type of test point
Rated data
Operating voltage
Max. current per channel
Operating voltage (supply)
Operating current (supply)
General data
Ambient temperature (operational)
Storage temperature
Insulation coordination (EN 50178)
Rated insulation voltage
Surge voltage category
Pollution severity level
Insulation test voltage
Pulse voltage test (1,2/50µs)
Dimensions
Clamping range, min./max. (field)
Clamping range, min./max. (supply)
Mounting rail
Length x width
Note

AAB841, AAI135, AAI141, AAI143, AAI841, AAI543, AAI835, AAP135, AAV141, AAV142, AAV144, AAV542, AAV544
2 x KS (40P)
No
No
No
Yes
Diameter: 2 mm
50 V AC / 70 V DC
1 A
50 V AC / 70 V DC
1 A
-25...70°C
-40...85 °C
< 50 V AC
III
2
0.35 kVAC
0.8 kV
Screw connection
0.13 mm ² / 6 mm ²
0.13 mm ² / 6 mm ²
TS 32, TS 35
170 mm / 87 mm
Tension-clamp connection
0.13 mm ² / 2.5 mm ²
0.13 mm ² / 2.5 mm ²
TS 32, TS 35
170 mm / 87 mm

Ordering data

Screw connection
Tension-clamp connection
Note

Type	Height	Order No.
TBY-C3-AIO-I-2KS-S	56 mm	1371600000
TBY-C3-AIO-I-2KS-Z	59.2 mm	1371610000

Accessories

Dekafix for AAV141, AAV142, AAV144, AAI543, AAV542, AAV544 (S)
DEK for AAI841 (S)
DEK for AAB841 (S)
DEK for AAI135, AAP135 (S)
DEK for AAI835 (S)
KSW for AAV141, AAV142, AAV144, AAI543, AAV542, AAV544 (Z)
KSW for AAI841 (Z)
KSW for AAB841 (Z)
KSW for AAI135, AAP135 (Z)
KSW for AAI835 (Z)
Test plug
Note

Type	Units x TBY	Order No.
DEK 5/5 TB-V15	40	1404320000
DEK 5/5 TB-V19	40	1411880000
DEK 5/5 TB-V17	40	1411860000
DEK 5/5 TB-V18	40	1411870000
DEK 5/5 TB-V20	40	1411890000
KSW 4 TB-V15	0.1	1404550000
KSW 4 TB-V19	0.1	1411830000
KSW 4 TB-V17	0.1	1411810000
KSW 4 TB-V18	0.1	1411820000
KSW 4 TB-V20	0.1	1411840000
PS 2.0 MC	1	0310000000
S (screw connection), Z (tension-clamp connection)		

TBY-CS3000 Input/output interfaces
for CS3000 analogue cards

- Interface for analogue signals
- 2 KS connectors (40 poles) for redundancy
 - Direct connection between the Yokogawa card and the field connectors.
 - The soldering tags allows the mounting of external components: voltage conversion or monitorization of the current loop.
 - Screw and tension clamp connection

Technical data

Connected to
Connection to the card
Connection data and functionality
Connection on control side
LED status display per channel
LED status of the supply voltage
Fuse per channel
Power supply fuse
Disconnection per channel
Type of test point
Rated data
Operating voltage
Max. current per channel
Operating voltage (supply)
Operating current (supply)
General data
Ambient temperature (operational)
Storage temperature
Insulation coordination (EN 50178)
Rated insulation voltage
Surge voltage category
Pollution severity level
Insulation test voltage
Pulse voltage test (1,2/50µs)
Dimensions
Clamping range, min./max. (field)
Clamping range, min./max. (supply)
Mounting rail
Length x width
Note

Ordering data


	Screw connection
	Tension-clamp connection
Note	

TBY-C3-UNIV-SP-2KS



AAI141, AAI143, AAV141, AAV142, AAV144, AAI841, AAB841, AAV542, AAI543, AAV544, AAR181, AAI135, AAP135, AAI835	
2 x KS (40P)	
No	
No	
No	
No	
No	
Soldering tags	
50 V AC / 70 V DC	
1 A	
50 V AC / 70 V DC	
1 A	
-25...70°C	
-40...85 °C	
< 50 V AC	
III	
2	
0.35 kVAC	
0.8 kV	
Screw connection	Tension-clamp connection
0.13 mm ² / 6 mm ²	0.13 mm ² / 2.5 mm ²
0.13 mm ² / 6 mm ²	0.13 mm ² / 2.5 mm ²
TS 32, TS 35	TS 32, TS 35
112 mm / 109 mm	112 mm / 109 mm

Type	Height	Order No.
TBY-C3-UNIV-SP-2KS-S	70 mm	1371640000
TBY-C3-UNIV-SP-2KS-Z	65 mm	1371650000

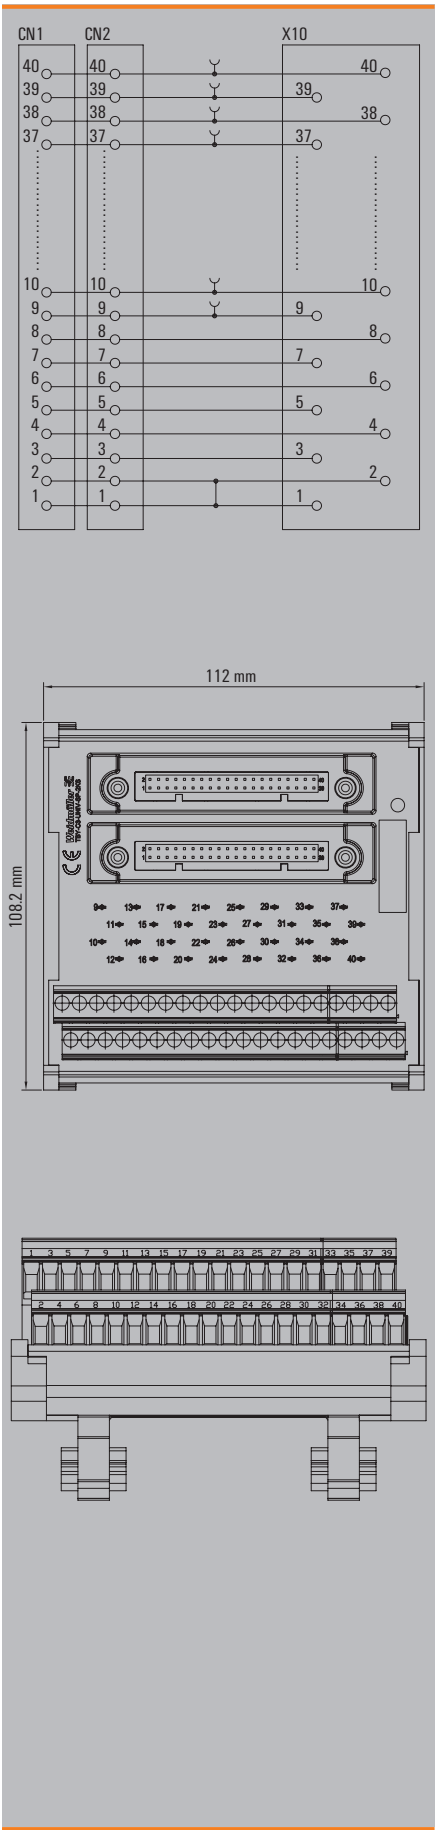


Yokogawa CS3000 – TBY Input/output interfaces for CS3000

TBY-CS3000 Input/output interfaces
for CS3000 digital cards

Interface for Centum CS3000 digital Cards

- AKB connectors (50 poles) for redundancy
- Direct connection between the Yokogawa card and the field connectors.
- Screw and tension clamp connection


TBY-C3-UNIV-2KB



Technical data

Connected to	
Connection to the card	ADV151, ADV161, ADV551, ADV561, AAR145
Connection data and functionality	
Connection on control side	2 x AKB (50P)
LED status display per channel	No
LED status of the supply voltage	No
Fuse per channel	No
Power supply fuse	No
Disconnection per channel	No
Type of test point	No
Rated data	
Operating voltage	50 V AC / 70 V DC
Max. current per channel	1 A
Operating voltage (supply)	50 V AC / 70 V DC
Operating current (supply)	1 A
General data	
Ambient temperature (operational)	-25...70°C
Storage temperature	-40...85 °C
Insulation coordination (EN 50178)	
Rated insulation voltage	< 50 V AC
Surge voltage category	III
Pollution severity level	2
Insulation test voltage	0.35 kVAC
Pulse voltage test (1,2/50µs)	0.8 kV
Dimensions	
Clamping range, min./max. (field)	
Clamping range, min./max. (supply)	
Mounting rail	TS 32, TS 35
Length x width	135 mm / 70 mm
Note	

Screw connection		Tension-clamp connection	
0.13 mm ² / 6 mm ²		0.13 mm ² / 2.5 mm ²	
0.13 mm ² / 6 mm ²		0.13 mm ² / 2.5 mm ²	
TS 32, TS 35		TS 32, TS 35	
135 mm / 70 mm		135 mm / 70 mm	

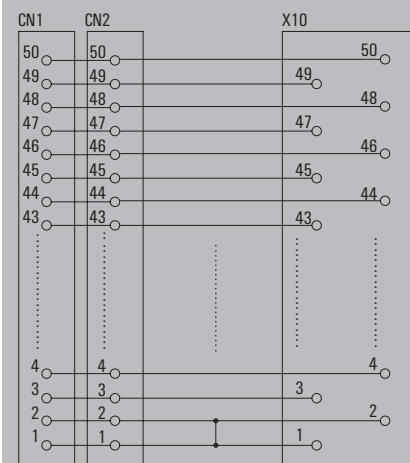

Ordering data

Type	Height	Order No.
TBY-C3-UNIV-2KB-S	56 mm	1384090000
TBY-C3-UNIV-2KB-Z	52 mm	1384080000
Note		

TBY-CS3000 Input/output interfaces
for CS3000 digital cards

- Interface for Centum ADV151 32 digital input Card
- 2 AKB connectors (50 poles) for redundancy
 - Green LED shows channel Status
 - The Card can be configured with positive or negative common (see schematic)
 - Monotorization of the Power supply status with green LED and alarm contact (24 V DC / 2...100 mA): close contact and led shinning means no supply fault.
 - Screw and tension clamp connection

Technical data

Connected to
Connection to the card
Connection data and functionality
Connection on control side
LED status display per channel
LED status of the supply voltage
Fuse per channel
Power supply fuse
Disconnection per channel
Type of test point
Rated data
Operating voltage
Max. current per channel
Operating voltage (supply)
Operating current (supply)
General data
Ambient temperature (operational)
Storage temperature
Insulation coordination (EN 50178)
Rated insulation voltage
Surge voltage category
Pollution severity level
Insulation test voltage
Pulse voltage test (1,2/50µs)
Dimensions
Clamping range, min./max. (field)
Clamping range, min./max. (supply)
Mounting rail
Length x width
Note


Ordering data

	Screw connection
	Tension-clamp connection
Note	

Accessories

	Supply fuse
	DEK for ADV161 (Channels 33...64) (S)
	KSW for ADV161 (Channels 33...64) (Z)
Note	


TBY-ADV151-PS-L-2KB



Connected to
ADV151, ADV161 (2 TBY by Card)
Connection data and functionality
2 x AKB (50P)
green
green
No
2 A
No
No
Rated data
24 V DC
1 A
24 V DC
2 A
General data
-25...70°C
-40...85 °C
Insulation coordination (EN 50178)
< 50 V AC
III
2
0.35 kVAC
0.8 kV
Screw connection
0.13 mm ² / 6 mm ²
0.13 mm ² / 6 mm ²
TS 32, TS 35
190 mm / 109 mm
Tension-clamp connection
0.13 mm ² / 2.5 mm ²
0.13 mm ² / 2.5 mm ²
TS 32, TS 35
190 mm / 109 mm

Type	Height	Order No.
TBY-ADV151-PS-L-2KB-S	85 mm	1384350000
TBY-ADV151-PS-L-2KB-Z	85 mm	1384340000

Type	Units x TBY	Order No.
FUSE G 25/2A/F BL	2	4007530000
DEK 5/5 TB-V25	200	1414820000
KSW 4 TB-V25	0.65	1414880000
S (screw connection), Z (tension-clamp connection)		

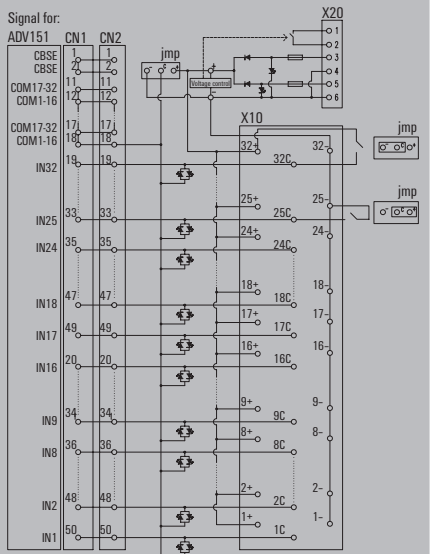

Field terminals view for 1384350000 (ADV151)



Field terminals view for ADV161 (Channels 33 to 64)

Yokogawa CS3000 – TBY Input/output interfaces for CS3000

TBY-CS3000 Input/output interfaces
for CS3000 digital cards

Interface for Centum ADV151 32 digital input Card

- 2 AKB connectors (50 poles) for redundancy
- The input sensors are connected to the card with fuses.
- Green LED shows channel status
- The Card can be configured with positive or negative common (see schematic)
- Monotorization of the Power supply status with green LED and alarm contact (24 V DC / 2...100 mA): close contact and led shinning means no supply fault.
- Screw and tension clamp connection

TBY-ADV151-PS-F-L-2KB



Technical data

Connected to	
Connection to the card	
Connection data and functionality	
Connection on control side	
LED status display per channel	
LED status of the supply voltage	
Fuse per channel	
Power supply fuse	
Disconnection per channel	
Type of test point	
Rated data	
Operating voltage	
Max. current per channel	
Operating voltage (supply)	
Operating current (supply)	
General data	
Ambient temperature (operational)	
Storage temperature	
Insulation coordination (EN 50178)	
Rated insulation voltage	
Surge voltage category	
Pollution severity level	
Insulation test voltage	
Pulse voltage test (1,2/50µs)	
Dimensions	
Clamping range, min./max. (field)	
Clamping range, min./max. (supply)	
Mounting rail	
Length x width	
Note	

Ordering data

	Screw connection
	Tension-clamp connection
Note	


Accessories

	Fuse per channel
	Supply fuse
	DEK for ADV161 (Channels 33...64) (S)
	KSW for ADV161 (Channels 33...64) (Z)
Note	

ADV551, ADV561 (2 TBY by Card)	
2 x AKB (50P)	
green	
green	
100 mA	
2 A	
No	
No	
24 V DC	
1 A	
24 V DC	
2 A	
-25...70°C	
-40...85 °C	
< 50 V AC	
III	
2	
0.35 kVAC	
0.8 kV	
Screw connection	Tension-clamp connection
0.13 mm ² / 6 mm ²	0.13 mm ² / 2.5 mm ²
0.13 mm ² / 6 mm ²	0.13 mm ² / 2.5 mm ²
TS 32, TS 35	TS 32, TS 35
190 mm / 131 mm	190 mm / 131 mm

Type	Height	Order No.
TBY-ADV151-PS-F-L-2KB-S	95 mm	1397820000
TBY-ADV151-PS-F-L-2KB-Z	95 mm	1397830000
Note		

Type	Units x TBY	Order No.
FUSE MST250 0.1A TR5	32	1391740000
FUSE G 25/2A/F BL	2	4007530000
DEK 5/5 TB-V25	200	1414820000
KSW 4 TB-V25	0.65	1414880000
S (screw connection), Z (tension-clamp connection)		

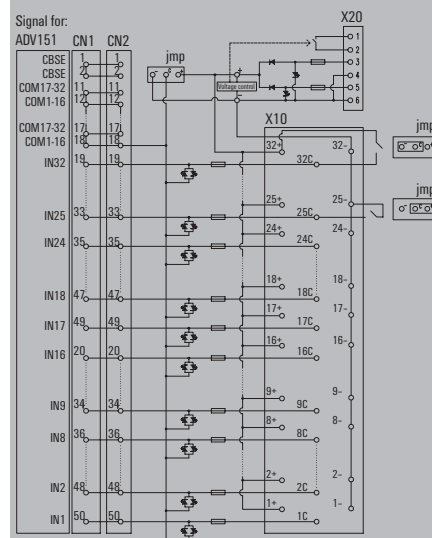

Field terminals view for 1397820000 (ADV151)



Field terminals view for ADV161 (Channels 33 to 64)

- Interface for Centum ADV151 32 digital input Card
- 2 AKB connectors (50 poles) for redundancy
- 100 mA fuse per channel
- Green LED shows relays switching status (control side).
- Red LED shows fuse blow
- The input sensors can be connected in 2 ways:
 - Powered by field terminals
 - Powered by the TBY with auxilary voltage
- Monotorization of the Power supply status with green LED and alarm contact (24 V DC / 2...100 mA): close contact and led shinning means no supply fault.
- Screw and tension clamp connection

Technical data

Connected to
Connection to the card
Connection data and functionality
Connection on control side
Relay type
Power supply fuse
Nominal input data
Input voltage
Input current
Operating voltage (supply)
Operating current (supply)
Nominal output data
Contact material
Operating voltage
Max. DC continuous current of the I/O card
Minimum contact current
Minimum contact voltage
Mechanical service life
General data
Ambient temperature (operational)
Storage temperature
Insulation coordination (EN 50178)
Rated input insulation voltage
Rated output insulation voltage
Overvoltage category input/output
Overvoltage category input/output
Overvoltage category output/output
Pollution severity level
Pulse voltage test (1,2/50µs)
Insulation test voltage
Clearance input/output
Dimensions
Clamping range, min./max. (field)
Clamping range, min./max. (supply)
Mounting rail
Length x width
Note

Ordering data

	Screw connection
	Tension-clamp connection
Note	

Accessories

	Fuse per channel
	Supply fuse
	Relay
	DEK for ADV161 (Channels 33...64) (S)
	KSW for ADV161 (Channels 33...64) (Z)
Note	




TBY-ADV151-24-PS-2KB




ADV151, ADV161 (2 TBY by Card)	
2 x AKB (50P)	
RSS	
1 A	
24 V DC $\pm$ 10%	
7mA /fuse on) / 0.5mA (fuse off)	
24 V DC	
1 A	
AgNi gold-plated	
18 ... 26,4 V DC	
10 mA	
1 mA	
1 V	
5 x 10 ⁶ switching cycles	
-25...70°C	
-40...85 °C	
≤ 50 V DC	
≤ 50 V DC	
III	
III	
III	
2	
1.5 kV	
0.35 kVAC	
≥ 5,5 mm	
Screw connection	Tension-clamp connection
0.13 mm ² / 6 mm ²	0.13 mm ² / 2.5 mm ²
0.13 mm ² / 6 mm ²	0.13 mm ² / 2.5 mm ²
TS 32, TS 35	TS 32, TS 35
317 mm / 131 mm	317 mm / 131 mm

Type	Height	Order No.
TBY-ADV151-24-PS-2KB-S	95 mm	1384330000
TBY-ADV151-24-PS-2KB-Z	95 mm	1384320000

Type	Units x TBY	Order No.
FUSE MST250 0.1A TR5	32	1391740000
FUS G 25/1.00A/F	2	2437240000
RSS112024 24VDC-REL1U	32	4061590000
DEK 5/5 TB-V23	100	1414780000
KSW 4 TB-V23	0.5	1414850000
S (screw connection), Z (tension-clamp connection)		

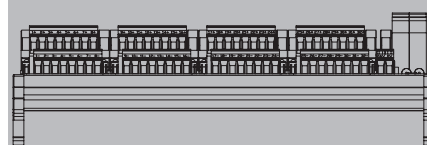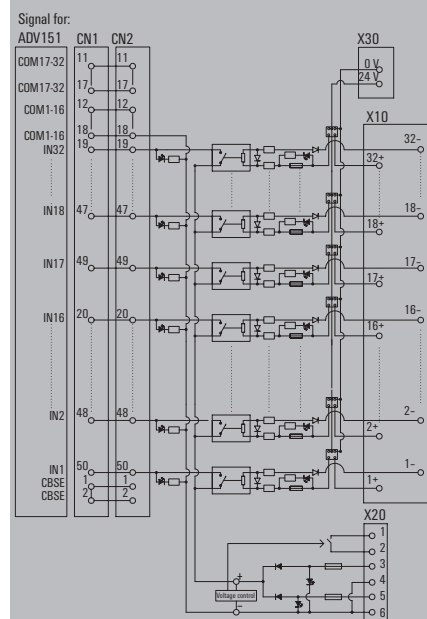

Field terminals view 1384330000 (ADV 151)

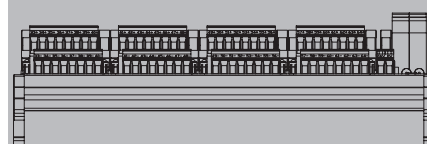

Field terminals view for ADV161 (Channels 33 to 64)

Yokogawa CS3000 – TBY Input/output interfaces for CS3000

TBY-CS3000 Input/output interfaces
for CS3000 digital cards

Interface for Centum ADV151 32 digital input Card

- 2 AKB connectors (50 poles) for redundancy
- Green LED shows relays switching status (control side).
- Red LED shows fuse blowper channel (100 mA)
- The input sensors can be powered from field terminals or from auxiliar voltage.
- Dual power supply can be connected to the TBY to supply sensors and Yokogawa Card.
- Monotorization of the Power supply status with green LED and alarm contact (24 V DC / 2...100 mA): close contact and led shinning means no supply fault.
- Screw and tension clamp connection

TBY-ADV151-48-PS-2KB



Technical data

Connected to	
Connection to the card	ADV151, ADV161 (2 TBY by Card)
Connection data and functionality	
Connection on control side	2 x AKB (50P)
Relay type	RSS
Power supply fuse	1 A
Nominal input data	
Input voltage	48 V DC $\pm$ 10%
Input current	7mA /fuse on) / 0.5mA (fuse off)
Operating voltage (supply)	24 V DC
Operating current (supply)	1 A
Nominal output data	
Contact material	AgNi gold-plated
Operating voltage	18 ... 26,4 V DC
Max. DC continuous current of the I/O card	10 mA
Minimum contact current	1 mA
Minimum contact voltage	1 V
Mechanical service life	5 x 10 ⁶ switching cycles
General data	
Ambient temperature (operational)	-25...70°C
Storage temperature	-40...85 °C
Insulation coordination (EN 50178)	
Rated input insulation voltage	$\leq$ 50 V DC
Rated output insulation voltage	$\leq$ 50 V DC
Overvoltage category input/output	III
Overvoltage category input/input	III
Overvoltage category output/output	III
Pollution severity level	2
Pulse voltage test (1,2/50 μ s)	1.5 kV
Insulation test voltage	0.35 kVAC
Clearance input/output	$\geq$ 5.5 mm
Dimensions	
Clamping range, min./max. (field)	0.13 mm ² / 6 mm ²
Clamping range, min./max. (supply)	0.13 mm ² / 6 mm ²
Mounting rail	TS 32, TS 35
Length x width	317 mm / 131 mm
Note	


Ordering data

Type	Height	Order No.
TBY-ADV151-48-PS-2KB-S	95 mm	1384280000
TBY-ADV151-48-PS-2KB-Z	95 mm	1384250000



Accessories

Type	Units x TBY	Order No.
FUSE MST250 0.1A TR5	32	1391740000
FUS G 25/1.00A/F	2	2437240000
RSS112024 24VDC-REL1U	32	4061590000
DEK 5/5 TB-V23	100	1414780000
KSW 4 TB-V23	0.5	1414850000


S (screw connection), Z (tension-clamp connection)

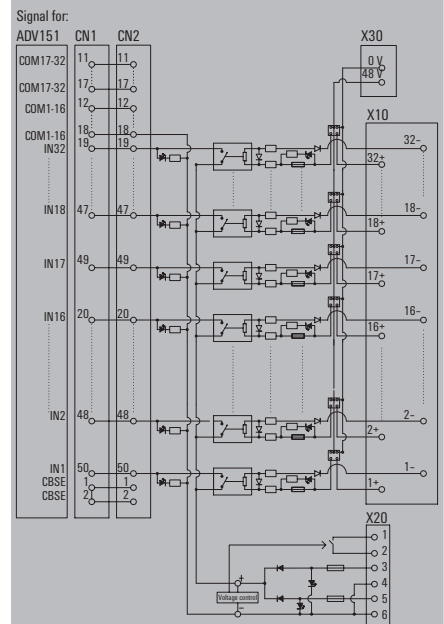

Jumpers configuration

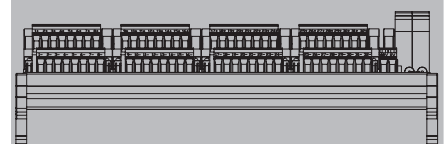

Field terminals view 1324280000 (ADV 151)

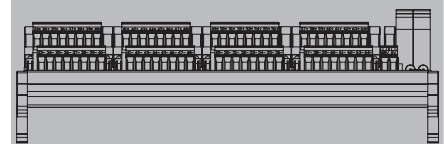

Field terminals view for ADV161 (Channels 33 to 64)

TBY-CS3000 Input/output interfaces for CS3000 digital cards

Interface for Centum ADV551 32 digital output Card

- 2 AKB connectors (50 poles) for redundancy
- Green LED shows relays switching status (control side).
- The output sensors can be connected in 2 ways:
 - Powered by field terminals
 - Powered by the TBY with auxiliary voltage (groups of 8 channels)
- Monitoring of the Power supply status with green LED and alarm contact (24 V DC / 2...100 mA): close contact and led shining means no supply fault.
- Screw and tension clamp connection

Technical data

Connected to	
Connection to the card	ADV551, ADV561 (2 TBY by Card)
Connection data and functionality	
Connection on control side	2 x AKB (50P)
Relay type	RSS
Fuse per channel	No
Power supply fuse	1 A
Nominal input data	
Input voltage	24 V DC $\pm$ 10%
Input current	13 mA
Operating voltage (supply)	24 V DC
Operating current (supply)	1 A
Nominal output data	
Contact material	AgNi 90/10
Operating voltage	250 V AC
Max. AC continuous current	2.5 A
Minimum contact current	0.1 A
Minimum contact voltage	5 V
Mechanical service life	5 x 10 ⁶ switching cycles
General data	
Ambient temperature (operational)	-25...70°C
Storage temperature	-40...85 °C
Insulation coordination (EN 50178)	
Rated input insulation voltage	$\leq$ 50 V DC
Rated output insulation voltage	250 V AC
Overvoltage category input/output	III
Overvoltage category input/input	II
Overvoltage category output/output	II
Pollution severity level	2
Pulse voltage test (1,2/50µs)	6 kV
Insulation test voltage	1.2 kVAC
Clearance input/output	$\geq$ 5.5 mm
Dimensions	
Clamping range, min./max. (field)	0.13 mm ² / 6 mm ²
Clamping range, min./max. (supply)	0.13 mm ² / 6 mm ²
Mounting rail	TS 32, TS 35
Length x width	303 mm / 131 mm
Note	


Ordering data

	Screw connection	
	Tension-clamp connection	
Note		

Accessories

	Supply fuse	
	Relay (for channels)	
	Relay (for alarm)	
	DEK for ADV561 (Channels 33...64) (S)	
	KSW for ADV561 (Channels 33...64) (Z)	
Note		

TBY-ADV551-CF-PS-2KB

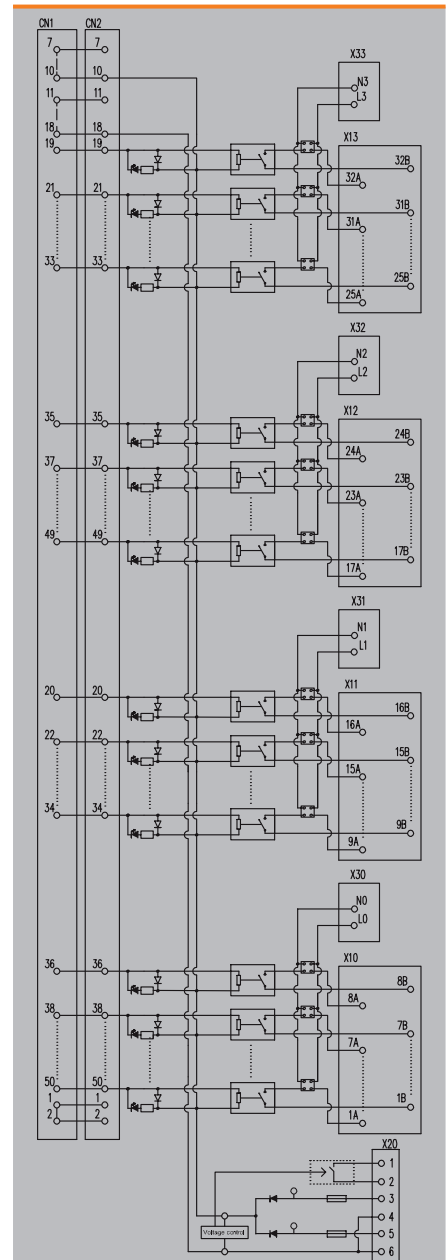

Jumpers configuration

Powered from field terminals

Powered from power terminal



Field terminals view 1379500000 (ADV 551)



Field terminals view for ADV561 (Channels 33 to 64)

The following selection guides enable you to quickly and easily choose the correct products according to your application needs:

STEP 1: Choose the Yokogawa Card to be used.

STEP 2: Choose the most suitable interface for the application.

Example: For SAI143 it's possible to select different options:

* In screw: 1371130000, 1371150000, 1371220000, 1371340000, 1371240000

* In tension clamp: 1371140000, 1371170000, 1371230000, 1371250000

This is small selection of the most frequently used termination boards. Other termination boards are also available.

G3 termination boards can also be provided under demand.

Yokogawa Pro Safe – Selection guide

STEP 1		STEP 2											
Yokogawa Card		TBY (Weidmüller Interfaces for Yokogawa)											
Kind of Card	Card	Kind of connector	Redundancy Power supply	Fuses per channel	Disconnect + Test points	Forks for components	Led channel	Led fuse	Relay	Type	Order No. Screw	Order No. Tension clamp	Page
16 analogue current input	SAI143	KS								TBY-RS-AIO-2KS	1371130000	1371140000	C.18
		KS								TBY-SAI143-2KS	1371150000	1371170000	C.18
		KS								TBY-RS-AIO-2KS	1371220000	1371230000	C.20
		KS								TBY-RS-UNIV-SP-2KS	1371340000	1371370000	C.21
		KS	6,3 A	1 A					Yes		TBY-SAI143-F-L-PS-2KS	1371240000	1371250000
8 analogue current output	SAI533	KS								TBY-RS-AIO-2KS	1371130000	1371140000	C.18
		KS								TBY-SAI533-2KS	1371200000	1371210000	C.18
		KS								TBY-RS-AIO-2KS	1371220000	1371230000	C.20
		KS								TBY-RS-UNIV-SP-2KS	1371340000	1371370000	C.21
16 analogue voltage input	SAV144	KS								TBY-RS-AIO-2KS	1371130000	1371140000	C.18
		KS								TBY-SAV144-2KS	1371180000	1371190000	C.18
		KS								TBY-RS-AIO-2KS	1371220000	1371230000	C.20
		KS								TBY-RS-UNIV-SP-2KS	1371340000	1371370000	C.21
16 digital input	SDV144	AKB	2 A							TBY-SDV144-PS-2KB	1371390000	1371410000	C.24
		AKB	2 A	100 mA						TBY-SDV144-F-PS-2KB	1395370000	1395380000	C.25
		AKB								TBY-RS-DIO-2KB	1371540000	1371570000	C.23
4 digital output	SDV521	AKB								TBY-RS-DIO-2KB	1371540000	1371570000	C.23
8 digital output	SDV531	AKB								TBY-RS-DIO-2KB	1371540000	1371570000	C.23
16 digital output	SDV541	AKB		16 digital						TBY-RS-DIO-2KB	1371540000	1371570000	C.23
Note:													

Yokogawa ProSafe – TBY Input/output interfaces for ProSafe

TBY-RS Input/output interfaces
for ProSafe analogue cards

Interface for 8 or 16 analogue signals (depend on marking)

- 2 KS connectors (40 poles) for redundancy
- Direct connection between the Yokogawa card and the field connectors.
- Basic modul also without marking available and markers as accessory for customer flexibility
- Complete modules with marking available
- Screw and tension clamp connection

TBY-



Technical data


Connected to	
Connection to the card	SAI143, SAV144, SAI553
Connection data and functionality	
Connection on control side	2 x KS (40P)
LED status display per channel	No
LED status of the supply voltage	No
Fuse per channel	No
Power supply fuse	No
Disconnection per channel	No
Type of test point	No
Rated data	
Operating voltage	50 V AC / 70 V DC
Max. current per channel	1 A
Operating voltage (supply)	50 V AC / 70 V DC
Operating current (supply)	1 A
General data	
Ambient temperature (operational)	-25...70°C
Storage temperature	-40...85 °C
Insulation coordination (EN 50178)	
Rated insulation voltage	< 50 V AC
Surge voltage category	III
Pollution severity level	2
Insulation test voltage	0.35 kVAC
Pulse voltage test (1,2/50µs)	0.8 kV
Dimensions	
Clamping range, min./max. (field)	0.13 mm ² / 6 mm ²
Clamping range, min./max. (supply)	0.13 mm ² / 6 mm ²
Mounting rail	TS 32, TS 35
Length x width	90 mm / 70 mm
Note	

Ordering data


Terminal block for:	Type	Height	Order No.
SAI143, SAV144, SAI533 without marking (S)	TBY-RS-AIQ-2KS-S	56 mm	1371130000
SAI143, SAV144, SAI533 without marking (Z)	TBY-RS-AIQ-2KS-Z	52 mm	1371140000
SAI143 (S)	TBY-SAI143-2KS-S	56 mm	1371150000
SAI143 (Z)	TBY-SAI143-2KS-Z	52 mm	1371170000
SAV144 (S)	TBY-SAV144-2KS-S	56 mm	1371180000
SAV144 (Z)	TBY-SAV144-2KS-Z	52 mm	1371190000
SAI553 (S)	TBY-SAI533-2KS-S	56 mm	1371200000
SAI553 (Z)	TBY-SAI533-2KS-Z	52 mm	1371210000
Note	S (screw connection), Z (tension-clamp connection)		

Accessories


Type	Units x TBY	Order No.
DEK 5 TB-V1	40	1379120000
DEK 5 TB-V2	40	1379110000
DEK 5 TB-V3	40	1371120000
KSW 4 TB-V1	0.1	1390700000
KSW 4 TB-V2	0.1	1394320000
KSW 4 TB-V3	0.1	1394330000
Note	S (screw connection), Z (tension-clamp connection)	

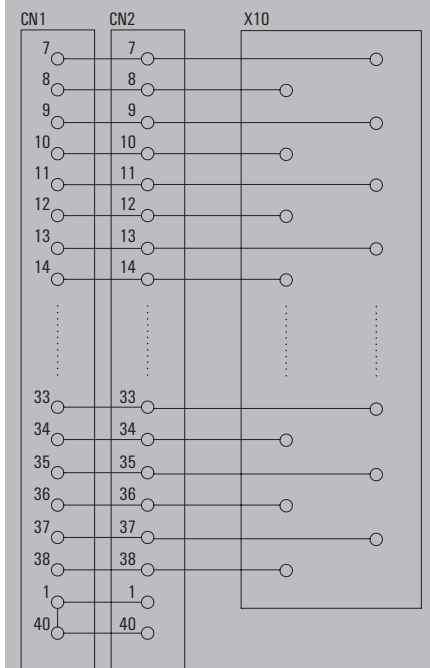


Schematic 1371130000/1371140000

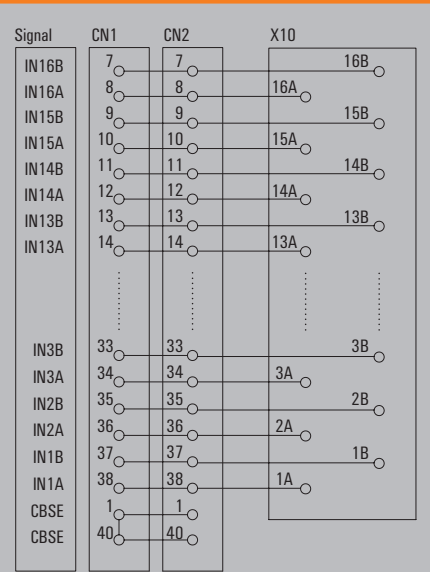


Schematic 1371150000/1371170000 (SAI143)

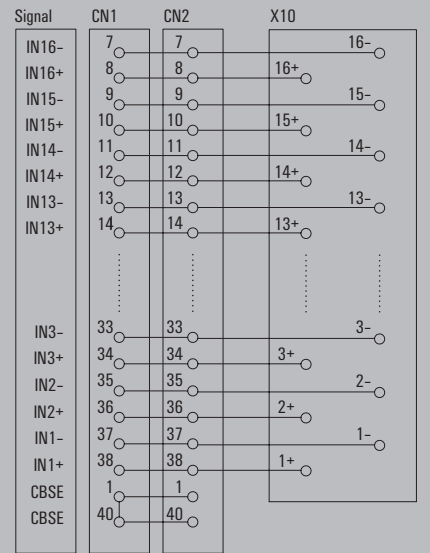


Schematic 1371180000/1371190000 (SAV144)

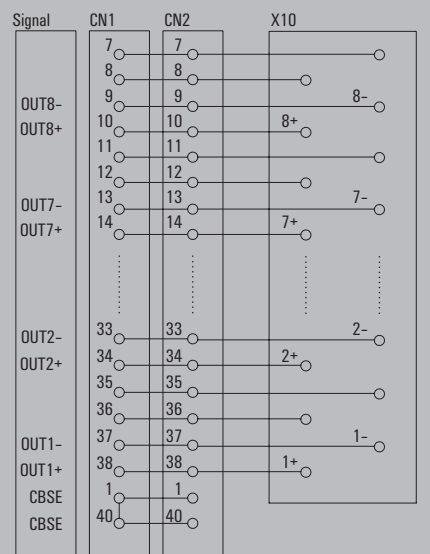


Schematic 1371200000/1371210000 (SAI533)

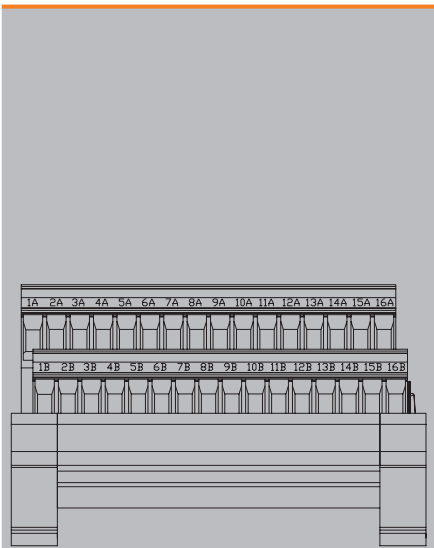

Field terminal view 1371150000

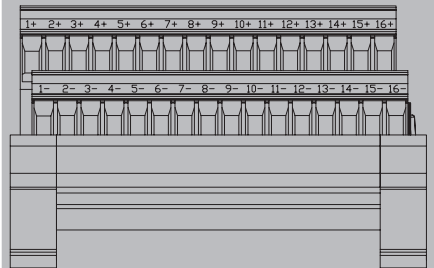

Field terminal view 1371180000

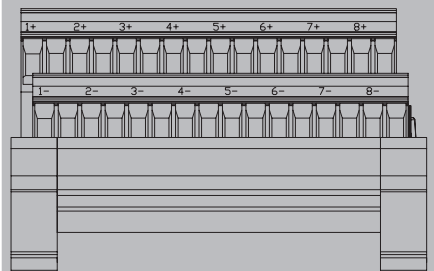

Field terminal view 1371200000

Yokogawa ProSafe – TBY Input/output interfaces for ProSafe

TBY-RS Input/output interfaces
for ProSafe analogue cards

Interface for 8 or 16 analogue signals

- 2 KS connectors (40 poles) for redundancy
- Disconnecting plugs and test points (2 mm diameter) for voltage or current measurement.
- The TBY is delivered with the marking for SAI143 and it's compatible with cards SAV144 and SAI533. Marker available as accessory.
- Screw and tension clamp connection

TBY-RS-AIO-I-2KS



Technical data


Connected to	
Connection to the card	SAI143, SAV144, SAI533
Connection data and functionality	
Connection on control side	2 x KS (40P)
LED status display per channel	No
LED status of the supply voltage	No
Fuse per channel	No
Power supply fuse	No
Disconnection per channel	Yes
Type of test point	Diameter: 2 mm
Rated data	
Operating voltage	50 V AC / 70 V DC
Max. current per channel	1 A
Operating voltage (supply)	50 V AC / 70 V DC
Operating current (supply)	1 A
General data	
Ambient temperature (operational)	-25...70°C
Storage temperature	-40...85 °C
Insulation coordination (EN 50178)	
Rated insulation voltage	< 50 V AC
Surge voltage category	III
Pollution severity level	2
Insulation test voltage	0.35 kVAC
Pulse voltage test (1,2/50µs)	0.8 kV
Dimensions	
Clamping range, min./max. (field)	0.13 mm ² / 6 mm ²
Clamping range, min./max. (supply)	0.13 mm ² / 6 mm ²
Mounting rail	TS 32, TS 35
Length x width	170 mm / 87 mm
Note	

Ordering data


Type	Height	Order No.
TBY-RS-AIO-I-2KS-S	56 mm	1371220000
TBY-RS-AIO-I-2KS-Z	59.2 mm	1371230000
Note		

Accessories

Type	Units x TBY	Order No.
DEK 5/5 TB-V15	40	1404320000
DEK 5/5 TB-V16	40	1404330000
KSW 5 TB-V15	0.1	1404550000
KSW 5 TB-V16	0.1	1404540000
PS 2.0 MC	1	0310000000
Note	S (screw connection), Z (tension-clamp connection)	

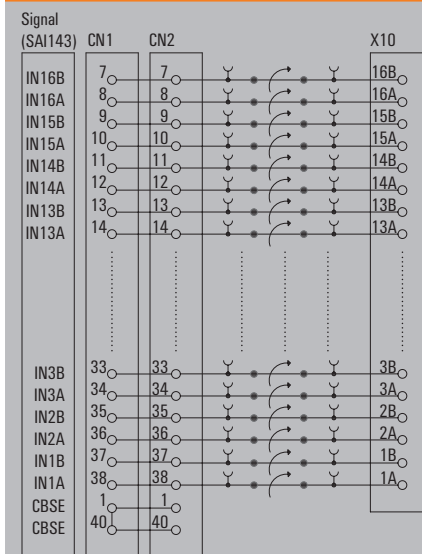


Connection for SAI143

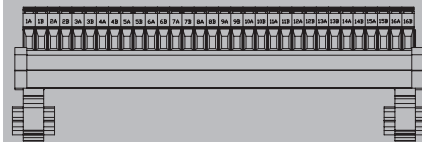


Field terminals view 1371220000

Application note: With the markers showed as accessories, is possible to configure the TBY for other cards

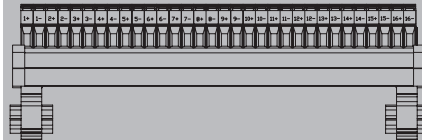

Field terminals view for SAV144

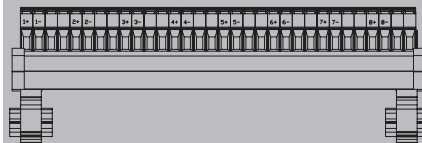

Field terminals view for SAI533

TBY-RS Input/output interfaces
for ProSafe analogue cards

- Interface for analogue signals
- 2 KS connectors (40 poles) for redundancy
 - Direct connection between the Yokogawa card and the field connectors.
 - The soldering tags allows the mounting of external components: voltage conversion or monitorization of the current loop.
 - Screw and tension clamp connection


Technical data

Connected to
Connection to the card
Connection data and functionality
Connection on control side
LED status display per channel
LED status of the supply voltage
Fuse per channel
Power supply fuse
Disconnection per channel
Type of test point
Rated data
Operating voltage
Max. current per channel
Operating voltage (supply)
Operating current (supply)
General data
Ambient temperature (operational)
Storage temperature
Insulation coordination (EN 50178)
Rated insulation voltage
Surge voltage category
Pollution severity level
Insulation test voltage
Pulse voltage test (1,2/50µs)
Dimensions
Clamping range, min./max. (field)
Clamping range, min./max. (supply)
Mounting rail
Length x width
Note

Ordering data


	Screw connection
	Tension-clamp connection
Note	

TBY-RS-UNIV-SP-2KS



SAI143, SAV144, SAI553	
2 x KS (40P)	
No	
No	
No	
No	
No	
Soldering tags	
50 V AC / 70 V DC	
1 A	
50 V AC / 70 V DC	
1 A	
-25...70°C	
-40...85 °C	
< 50 V AC	
III	
2	
0.35 kVAC	
0.8 kV	
Screw connection	Tension-clamp connection
0.13 mm² / 6 mm²	0.13 mm² / 2.5 mm²
0.13 mm² / 6 mm²	0.13 mm² / 2.5 mm²
TS 32, TS 35	TS 32, TS 35
112 mm / 109 mm	112 mm / 109 mm

Type	Height	Order No.
TBY-RS-UNIV-SP-2KS-S	70 mm	1371340000
TBY-RS-UNIV-SP-2KS-Z	65 mm	1371370000

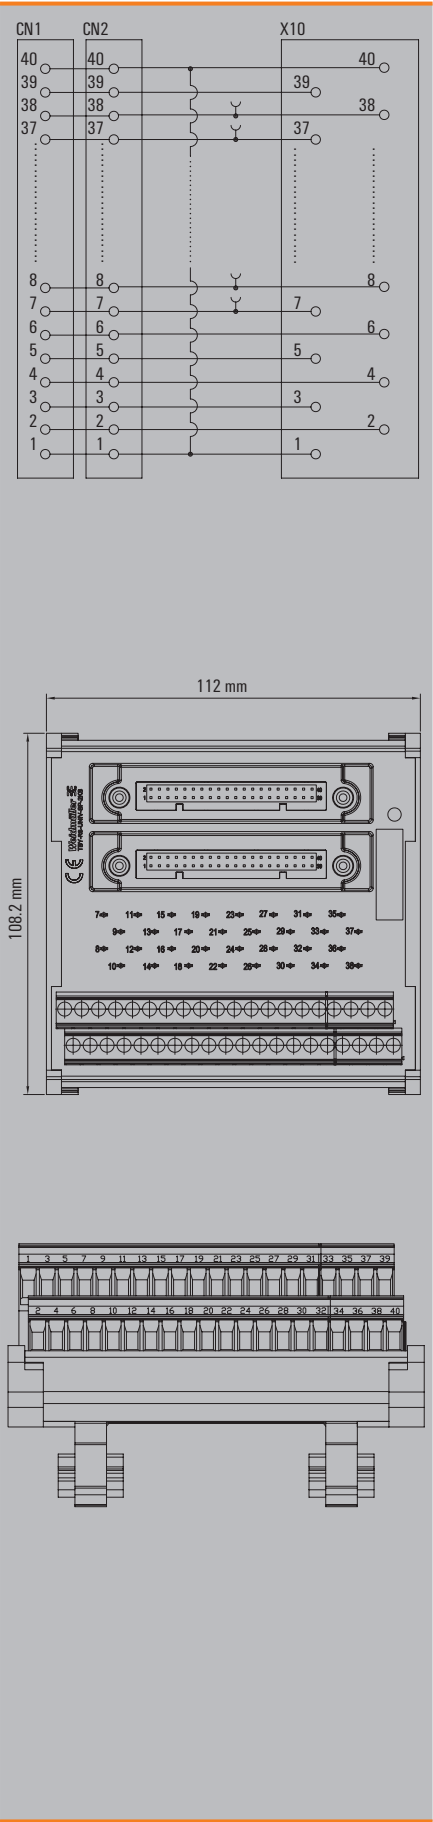

Yokogawa ProSafe – TBY Input/output interfaces for ProSafe

TBY-RS Input/output interfaces
for ProSafe analogue cards

- Interface for Pro-safe SA143 analogue input Card
- 2 KS connectors (40 poles) for redundancy
 - The input sensors are connected to the card with fuses.
 - Red LED show fuses status
 - Dual power supply can be connected to the TBY to supply sensors and Yokogawa Card.
 - Monotorization of the Power supply status with green LED and alarm contact (24 V DC / 2...100 mA): close contact and led shinning means no supply fault.
 - Screw and tension clamp connection

TBY-SAI143-F-L-PS-2KS



Technical data

Connected to
Connection to the card
Connection data and functionality
Connection on control side
LED status display per channel
LED status of the supply voltage
Fuse per channel
Power supply fuse
Disconnection per channel
Type of test point
Rated data
Operating voltage
Max. current per channel
Operating voltage (supply)
Operating current (supply)
General data
Ambient temperature (operational)
Storage temperature
Insulation coordination (EN 50178)
Rated insulation voltage
Surge voltage category
Pollution severity level
Insulation test voltage
Pulse voltage test (1,2/50µs)
Dimensions
Clamping range, min./max. (field)
Clamping range, min./max. (supply)
Mounting rail
Length x width
Note

SAI143
2 x KS (40P)
red
green
1 A
6.3 A
No
No
24 V DC
1 A
24 V DC
6.3 A
Screw connection
0.13 mm ² / 6 mm ²
0.13 mm ² / 6 mm ²
TS 32, TS 35
133 mm / 131 mm
Tension-clamp connection
0.13 mm ² / 2.5 mm ²
0.13 mm ² / 2.5 mm ²
TS 32, TS 35
133 mm / 131 mm

Ordering data


Screw connection
Tension-clamp connection
Note

Type	Height	Order No.
TBY-SAI143-F-L-PS-2KS-S	107 mm	1371240000
TBY-SAI143-F-L-PS-2KS-Z	107 mm	1371250000

Accessories

Fuse per channel
Supply fuse
Note

Type	Units x TBY	Order No.
FUSE MST250 1A TR5	16	1391770000
FUSE G 25/6.30A/F GN	2	4007550000

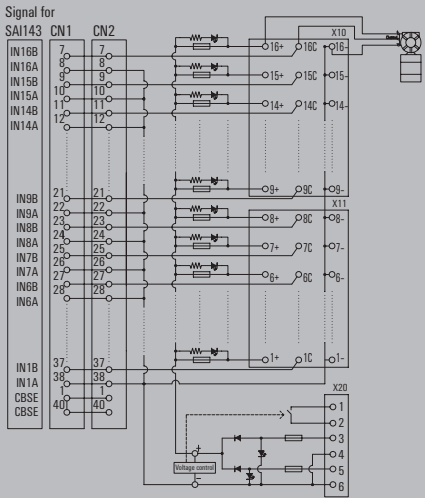

TBY-RS Input/output interfaces
for ProSafe digital cards

- Interface for Pro-safe digital Cards
- AKB connectors (50 poles) for redundancy
 - Direct connection between the Yokogawa card and the field connectors.
 - Screw and tension clamp connection


Technical data

Connected to
Connection to the card
Connection data and functionality
Connection on control side
LED status display per channel
LED status of the supply voltage
Fuse per channel
Power supply fuse
Disconnection per channel
Type of test point
Rated data
Operating voltage
Max. current per channel
Operating voltage (supply)
Operating current (supply)
General data
Ambient temperature (operational)
Storage temperature
Insulation coordination (EN 50178)
Rated insulation voltage
Surge voltage category
Pollution severity level
Insulation test voltage
Pulse voltage test (1,2/50µs)
Dimensions
Clamping range, min./max. (field)
Clamping range, min./max. (supply)
Mounting rail
Length x width
Note

Ordering data


	Screw connection
	Tension-clamp connection
Note	

TBY-RS-DIO-2KB



SDV144, SDV521, SDV531, SDV541	
2 x AKB (50P)	
No	
No	
No	
No	
No	
No	
50 V AC / 70 V DC	
1 A	
50 V AC / 70 V DC	
1 A	
-25...70°C	
-40...85 °C	
< 50 V AC	
III	
2	
0.35 kVAC	
0.8 kV	
Screw connection	Tension-clamp connection
0.13 mm ² / 6 mm ²	0.13 mm ² / 2.5 mm ²
0.13 mm ² / 6 mm ²	0.13 mm ² / 2.5 mm ²
TS 32, TS 35	TS 32, TS 35
135 mm / 70 mm	135 mm / 70 mm


Type	Height	Order No.
TBY-RS-DIO-2KB-S	56 mm	1371540000
TBY-RS-DIO-2KB-Z	52 mm	1371570000

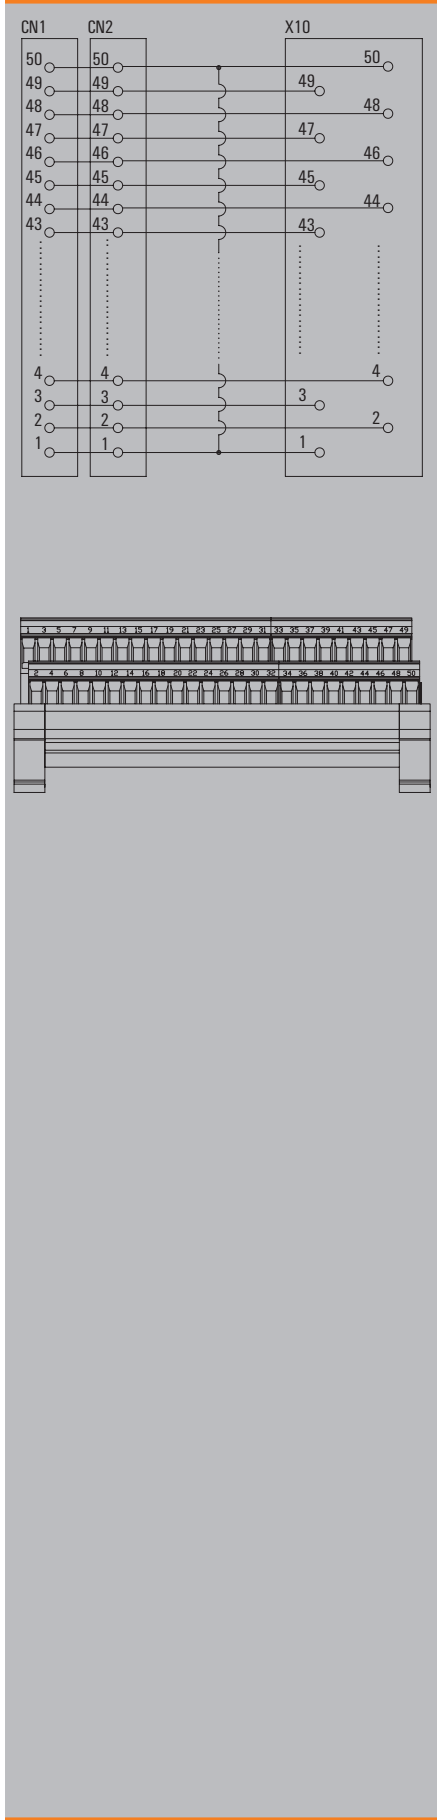

TBY-RS Input/output interfaces
for ProSafe digital cards

- Interface for Pro-safe SDV144 digital input Card
- 2 AKB connectors (50 poles) for redundancy
 - Dual power supply can be connected to the TBY to supply sensors and Yokogawa Card.
 - Monotorization of the Power supply status with green LED and alarm contact (24 V DC / 2...100 mA): close contact and led shinning means no supply fault.
 - Screw and tension clamp connection

TBY-SDV144-PS-2KB



Technical data

Connected to	
Connection to the card	SDV144
Connection data and functionality	
Connection on control side	2 x AKB (50P)
LED status display per channel	No
LED status of the supply voltage	green
Fuse per channel	No
Power supply fuse	2 A
Disconnection per channel	No
Type of test point	No
Rated data	
Operating voltage	24 V DC
Max. current per channel	1 A
Operating voltage (supply)	24 V DC
Operating current (supply)	2 A
General data	
Ambient temperature (operational)	-25...70°C
Storage temperature	-40...85 °C
Insulation coordination (EN 50178)	
Rated insulation voltage	< 50 V AC
Surge voltage category	III
Pollution severity level	2
Insulation test voltage	0.35 kVAC
Pulse voltage test (1,2/50µs)	0.8 kV
Dimensions	
Clamping range, min./max. (field)	0.13 mm² / 6 mm²
Clamping range, min./max. (supply)	0.13 mm² / 6 mm²
Mounting rail	TS 32, TS 35
Length x width	134 mm / 109 mm
Note	

Ordering data

	Screw connection
	Tension-clamp connection
Note	


Accessories

	Supply fuse
Note	

Screw connection		Tension-clamp connection
0.13 mm² / 6 mm²		0.13 mm² / 2.5 mm²
0.13 mm² / 6 mm²		0.13 mm² / 2.5 mm²
TS 32, TS 35		TS 32, TS 35
134 mm / 109 mm		134 mm / 109 mm

Type	Height	Order No.
TBY-SDV144-PS-2KB-S	80 mm	1371390000
TBY-SDV144-PS-2KB-Z	80 mm	1371410000


Type	Units x TBY	Order No.
FUSE G 25/2A/F BL	2	4007530000

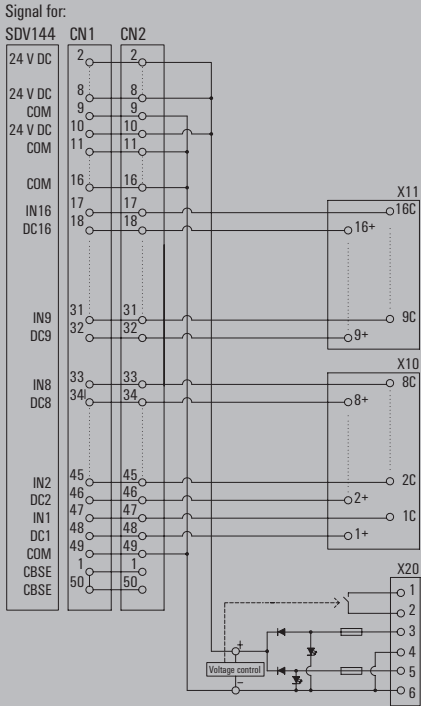

TBY-RS Input/output interfaces
for ProSafe digital cards

- Interface for Pro-safe SDV144 digital input Card
- 2 AKB connectors (50 poles) for redundancy
 - The input sensors are connected to the card with fuses.
 - Dual power supply can be connected to the TBY to supply sensors and Yokogawa Card.
 - Monotorization of the Power supply status with green LED and alarm contact (24 V DC / 2...100 mA).

TBY-SDV144-F-PS-2KB



Technical data

Connected to
Connection to the card
Connection data and functionality
Connection on control side
LED status display per channel
LED status of the supply voltage
Fuse per channel
Power supply fuse
Disconnection per channel
Type of test point
Rated data
Operating voltage
Max. current per channel
Operating voltage (supply)
Operating current (supply)
General data
Ambient temperature (operational)
Storage temperature
Insulation coordination (EN 50178)
Rated insulation voltage
Surge voltage category
Pollution severity level
Insulation test voltage
Pulse voltage test (1,2/50µs)
Dimensions
Clamping range, min./max. (field)
Clamping range, min./max. (supply)
Mounting rail
Length x width
Note

SDV144, SDV521, SDV531, SDV541	
2 x AKB (50P)	
No	
No	
100 mA	
2 A	
No	
No	
50 V AC / 70 V DC	
1 A	
50 V AC / 70 V DC	
1 A	
-25...70°C	
-40...85 °C	
< 50 V AC	
III	
2	
0.35 kVAC	
0.8 kV	
Screw connection	Tension-clamp connection
0.13 mm ² / 6 mm ²	0.13 mm ² / 2.5 mm ²
0.13 mm ² / 6 mm ²	0.13 mm ² / 2.5 mm ²
TS 32, TS 35	TS 32, TS 35
134 mm / 109 mm	134 mm / 109 mm

Ordering data


	Screw connection
	Tension-clamp connection
Note	

Type	Height	Order No.
TBY-SDV144-F-PS-2KB-S	80 mm	1395370000
TBY-SDV144-F-PS-2KB-Z	80 mm	1395380000

Accessories

	Fuse per channel
	Supply fuse
Note	

Type	Units x TBY	Order No.
FUSE MST250 0.1A TR5	16	1391740000
FUSE G 25/2A/F BL	2	4007530000

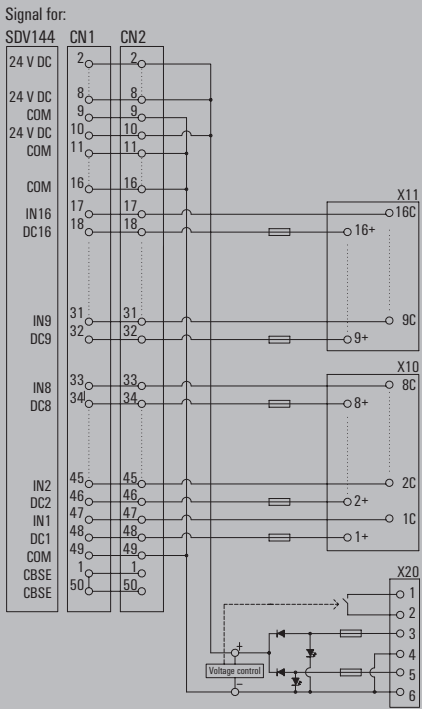

MIL cables

PAC-YOK - MIL Pre-made cables

- Pre-built cable according:
- MIL connector - MIL connector
 - MIL connector - ferrules
 - Colour code according DIN47100



PAC-YOK-MIL-F

MIL connector to ferrules



PAC-YOK-MIL-V0

MIL connector to MIL connector



Technical data

Rated data
Operating voltage
Permissible current strength per path, max.
Total current, max.
Resistance
Capacity wire / wires
Capacity wire / shield
Nominal rating, control cable
Cable
Material
Wire cross-section
General data
Ambient temperature (operational)
Storage temperature

1.00 A
3.00 A
≤ 150 mΩ/m
300 pF/m
Cable LiYY
PVC
0.14 mm²
-10...50°C
-10...60 °C

1.00 A
3.00 A
≤ 150 mΩ/m
300 pF/m
300 pF/m
Cable LiYCY
PVC
0.14 mm²
-10...50°C
-10...60 °C

Note

Note

Note

Ordering data

40-pole connector
50-pole connector

Type	Qty.	Order No.
PAC-YOK-MIL40-F-1M	1	2420520010
PAC-YOK-MIL50-F-1M	1	2420530010

Type	Qty.	Order No.
PAC-YOK-MIL40-V0-1M	1	1536840010
PAC-YOK-MIL50-V0-1M	1	1536820010

Note

The last 3 digits of the cable code indicate its length. For example, if the code ends in 100, the cable is 10 m long.
--

The last 3 digits of the cable code indicate its length. For example, if the code ends in 100, the cable is 10 m long.
--

Accessories

Note

Note

Note

Passive interfaces for general applications

Passive interfaces for general applications	Introduction	D.2
	RS F – Interface for flat cable in accordance with IEC 60603-13/ DIN 41651	D.6
	RS SD – Interface for connector SUB-D in accordance with IEC 60807-2/ DIN 41652	D.8
	RS SD HD – Interface for connector SUB-D high density	D.10
	RS RJ45 – Interfaces with RJ45 connector	D.11
	RS ELCO – Interface with ELCO plug-in connectors	D.12
	RS VERT – Supply voltage distributor modules	D.18
	RSD – Interfaces with diodes	D.21

Passive interfaces for general applications

Due to the need for cost reductions in the construction of electric cabinets, our interfaces for general applications offer an alternative to end-to-end wiring concepts. Their main function is as an adapter to enable a functional and safe operation between standard plug-in connectors connected to any controller or PLC, and printed circuit terminals connected to application sensors/activators.

Weidmüller's universal interfaces for applications have the following individual features:

- Extruded profile for inserting the PCB
- End plates for fitting on the mounting rail
- Clip-on feet for locking on standardised mounting rails TS 32 and TS 35
- Printed circuit board where the following elements can be identified:
 - Plug-in connectors
 - Weidmüller terminals for screw or tension clamp connection
 - Markings

The plug-in connectors used for interconnection can be divided into the following groups:


- Ribbon cable connector in accordance with IEC 60603-13/DIN 41651 (RSF)
- Miniature SUB-D plug-in connectors acc. to IEC 60807-2/DIN 41652
- RJ45 connectors for data lines
- Plug-in ELCO connectors for applications in high-demand industrial areas.

Pre-assembled cables with the corresponding plug-in connector systems are used in the connection between the controller and the interface. These pre-assembled cables allow maximum savings for the user, as they achieve a cost reduction in the materials, due to fewer individual cables, conductors and cable ducting.

Advantages of the interface units:

- Space savings thanks to the 2 and 3 floor interface terminals.
- Conventional end-to-end wiring is only needed on one side, therefore assembly and start-up times are reduced,
- Greater safety, preventing wiring errors
- Simplified setup and documentation


RS F – Interface for ribbon cable in accordance with IEC 60603-13/ DIN41651

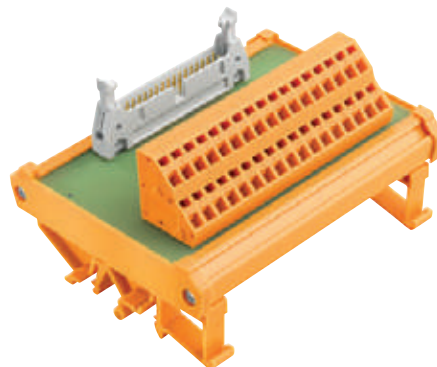

Passive interfaces for transmitting signals from a plug-in flat cable connector, based on IEC 60603-13 / DIN41651, to a tension clamp or screw connection.

Connection between both connectors is 1 to 1 and the range includes male connectors with between 10 and 64-poles.

RS SD – Interface for connector SUB-D in accordance with IEC 60807-2/ DIN41652

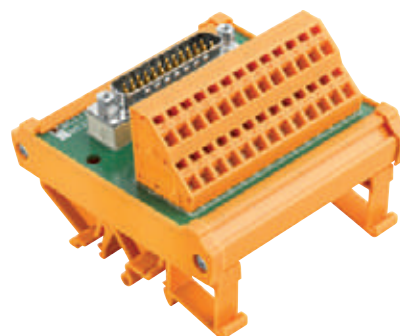

Passive interfaces for transmitting signals from a plug-in SUB-D connector based on IEC 60807-2 / DIN41652, to a tension clamp connection or screw connection.

Thanks to the metal casing of the SUB-D these connectors are ideal for transmitting analogue signals or for connection with shielded cables.

Connection between both connectors is 1 to 1 and the range includes male and female connectors with between 9 and 50-poles.

Sub-d High density 15,26,44 and 62 poles also available in screw connection.

RS RJ45 - Interfaces with RJ45 connector

Passive interfaces transport signals from a modem, router, computer or any other communications equipment using RJ45 connectors to screw or tension clamp connections.

They can be used to adapt the shielded RJ-45 8-pole connectors to screw connections or for coupling 2 data lines.


For data transmission rates of up to 100 Mbps, it is advisable to connect one end of the shield of the data cable to a protective earth.



The modules can be fixed to standard TS32 and/or TS35 mounting rails.

RS ELCO – Interface with ELCO plug-in connectors

Passive interfaces that transport signals proceeding from a 20 to 90-pole male/female ELCO plug-in connector to screw or tension clamp connection techniques.

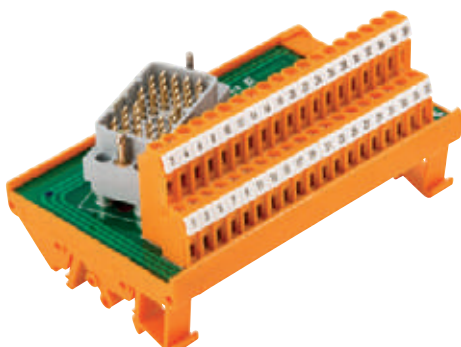


The ELCO connectors are used, for example, in electric power stations, refineries and in different processing applications in which a robust, reliable connection is needed for a large number of signals. The main feature of an ELCO connector is its reliability thanks to its hermaphrodite contact, which is shaped like a fork.

The diagonal disposition of the connector (from right to left) facilitates the wiring of the cables in the electrical cabinet and avoids them from crossing one other.

RS VERT – Supply voltage distributor modules


Passive interfaces for the distribution of AC or DC voltage. These interfaces can distribute from 2 to 6 different voltages. This allows distributing voltages of 230/400 V AC and DC control signals.

These interfaces provide an easy visualisation, and can be fixed to standard TS35 and/or TS32 assembly rails.

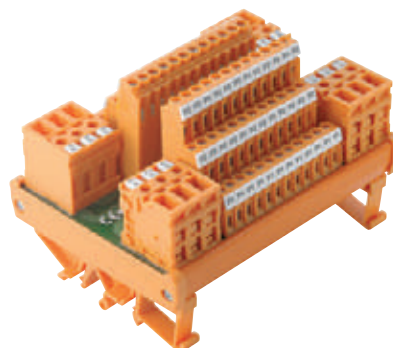

Passive interfaces for general applications

RSD – Interfaces with diodes

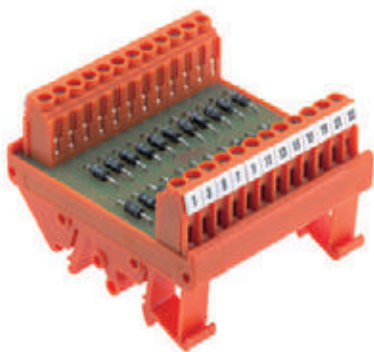

The diode interface is used for protection from surges, testing lamps or for preventing reverse polarity.

We therefore supply the following interfaces, namely:

- In common anode
- In common cathode
- Transverse diode

All come with screw connection and can be assembled onto TS-32 and TS-35 rails.



RS F - Interface for flat cable in accordance with IEC 60603-13 / DIN 41651

RS F - Interface for flat cable
in accordance with IEC 60603-13/DIN41651

Interface for flat cable in accordance with IEC 60603-13/
DIN41651



- 1:1 connection
- 10 to 64 poles
- Screw or tension clamp connection

RSF Z



N: Number of poles

RSF S



N: Number of poles

Technical data

Connection data
Connection on control side
Connection (field side)
Rated data
Operating voltage
Operating current per connection
General data
Ambient temperature (operational)
Storage temperature
Approvals
Insulation coordination (EN 50178)
Rated insulation voltage
Surge voltage category
Pollution severity level
Pulse voltage test (1,2/50µs)
Dimensions
Clamping range, min./max. (field)
Mounting rail
Width x height
Note

Connector according IEC60603-13/DIN41651
LM2NZF 5.08mm
60 V AC / 75 V DC
1 A
0...55°C
-40...70 °C
CE; EAC
100 V
II
2
0.8 kV
0.13 mm² / 2.5 mm²
TS 35, TS 32
87 mm / 64 mm

Connector according IEC60603-13/DIN41651
LP2N 5.08mm
60 V AC / 75 V DC
1 A
0...55°C
-40...60 °C
CE; EAC
100 V
II
2
0.8 kV
0.13 mm² / 6 mm²
TS 35, TS 32
87 mm / 70 mm

Ordering data

Type	Length	Order No.
RS F10 Z	50 mm	8537190000
RS F14 Z	50 mm	8537200000
RS F20 Z	65 mm	8537110000
RS F26 Z	80 mm	8537180000
RS F34 Z	110 mm	8537130000
RS F40 Z	115 mm	8537140000
RS F50 Z	145 mm	8537150000

Type	Length	Order No.
RS F10 Z	50 mm	8537190000
RS F14 Z	50 mm	8537200000
RS F20 Z	65 mm	8537110000
RS F26 Z	80 mm	8537180000
RS F34 Z	110 mm	8537130000
RS F40 Z	115 mm	8537140000
RS F50 Z	145 mm	8537150000

Type	Length	Order No.
RS F10 LP2N 5/10	50 mm	0224961001
RS F14 LP2N 5/14	50 mm	0225061001
RS F16 LP2N 5/16	55 mm	0225161001
RS F20 LP2N 5/20	65 mm	0224261001
RS F26 LP2N 5/26	80 mm	0224861001
RS F34 LP2N 5/34	110 mm	0224361001
RS F40 LP2N 5/40	115 mm	0224461001
RS F50 LP2N 5/50	145 mm	0224561001
RS F60 LP2N 5/60	180 mm	0224661001
RS F64 LP2N 5/64	180 mm	0224761001

Note

Note

Note


Accessories

Note

Refer to the „Universal cables PAC-UNIV“ section in chapter F

Refer to the „Universal cables PAC-UNIV“ section in chapter F

RSF S/ COMPACT

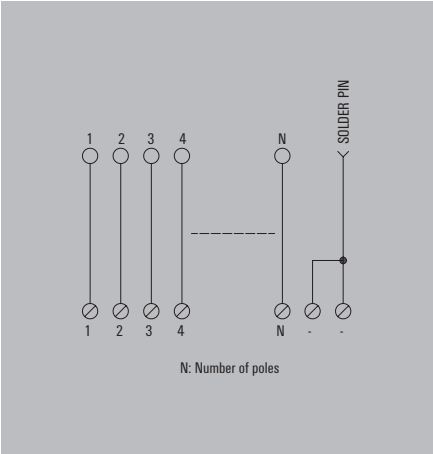


Connector according IEC60603-13/DIN41651
LP3R 5.08mm
60 V AC / 75 V DC
1 A
0...55°C
-40...70 °C
CE; EAC
100 V
II
2
0.8 kV
0.13 mm² / 6 mm²
TS 35, TS 32
87 mm / 76 mm

Type	Length	Order No.
RS F10 LP3R 3/12	40 mm	8012850000
RS F14 LP3R 3/14	45 mm	8012860000
RS F16 LP3R 3/18	50 mm	8012870000
RS F20 LP3R 3/21	50 mm	8012910000
RS F26 LP3R 3/27	55 mm	8012920000
RS F34 LP3R 3/36	70 mm	8012930000
RS F40 LP3R 3/42	80 mm	8012940000
RS F50 LP3R 3/51	95 mm	8012950000
RS F60 LP3R 3/63	115 mm	8012960000
RS F64 LP3R 3/66	120 mm	8012970000

Refer to the „Universal cables PAC-UNIV“ section in chapter F

RSF S/ RS45

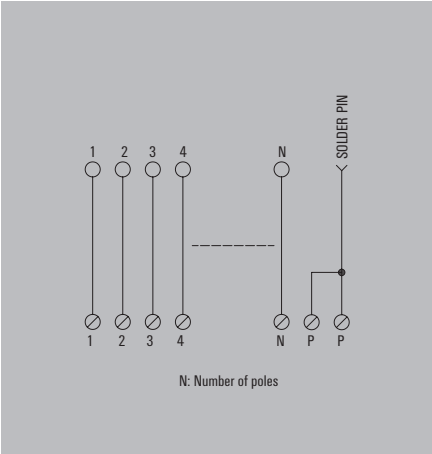

Connector according IEC60603-13/DIN41651
LPK 2H 5.08mm
60 V AC / 75 V DC
1 A
0...55°C
-40...70 °C
CE; EAC
100 V
II
2
0.8 kV
0.15 mm² / 1.5 mm²
TS 35
45 mm / 65.5 mm

Type	Length	Order No.
RS F10 LPK 2H/12	49 mm	8155610000
RS F14 LPK 2H/16	56 mm	8258980000
RS F16 LPK 2H/18	64 mm	8265540000
RS F20 LPK 2H/22	71 mm	8155600000
RS F26 LPK 2H/28	86 mm	8213470000
RS F34 LPK 2H/36	106 mm	8155590000
RS F40 LPK 2H/42	121 mm	8155580000
RS F50 LPK 2H/52	151 mm	8155570000
RS F60 LPK 2H/62	180 mm	8259000000
RS F64 LPK 2H/66	186 mm	8155550000

Refer to the „Universal cables PAC-UNIV“ section in chapter F


RS SD - Interface for SUB-D connector in accordance with IEC 60807-2 / DIN 41652

RS SD - Interface for SUB-D connector in accordance with IEC 60807-2 / DIN 41652

Interface for SUB-D connector in accordance with IEC 60807-2 / DIN41652.



- 1:1 connection
- 9 to 50 poles
- Screw or tension clamp connection

RSSD Z



N: Number of poles

RSSD S



N: Number of poles

Technical data

Connection data
Connection on control side
Connection (field side)
Rated data
Operating voltage
Operating current per connection
General data
Ambient temperature (operational)
Storage temperature
Approvals
Insulation coordination (EN 50178)
Rated insulation voltage
Surge voltage category
Pollution severity level
Pulse voltage test (1,2/50µs)
Dimensions
Clamping range, min./max. (field)
Mounting rail
Width x height
Note

D-sub connectors, acc. to IEC 60807 / DIN 41652
LM2NZF 5.08mm
100 V
1.5 A
0...55°C
-40...70 °C
CE; EAC
100 V
II
2
0.8 kV
0.13 mm ² / 2.5 mm ²
TS 35, TS 32
87 mm / 63.6 mm

D-sub connectors, acc. to IEC 60807 / DIN 41652
LP2N 5.08mm
100 V
1.5 A
0...55°C
-40...70 °C
CE; EAC
100 V
II
2
0.8 kV
0.13 mm ² / 6 mm ²
TS 35, TS 32
87 mm / 76 mm

Ordering data

9-pole male connector
15-pole male connector
25-pole male connector
37-pole male connector
50-pole male connector
9-pole female connector
15-pole female connector
25-pole female connector
37-pole female connector
50-pole female connector

Type	Length	Order No.
RS SD9 SZ	45 mm	8537260000
RS SD15 SZ	60 mm	8537390000
RS SD25 SZ	80 mm	8537370000
RS SD37 SZ	110 mm	8537240000
RS SD50 SZ	145 mm	8537350000
RS SD9 BZ	45 mm	8537320000
RS SD15 BZ	60 mm	8537400000
RS SD25 BZ	80 mm	8537380000
RS SD37 BZ	110 mm	8537250000
RS SD50 BZ	87 mm	8537360000

Type	Length	Order No.
RS SD9S UNC 4.40 LP2N	45 mm	8003901001
RS SD15S UNC 4.40 LP2N	60 mm	8005201001
RS SD25S UNC 4.40 LP2N	80 mm	8005181001
RS SD37S UNC 4.40 LP2N	110 mm	8003881001
RS SD50S UNC 4.40 LP2N	154 mm	8005161001
RS SD9B UNC 4.40 LP2N	45 mm	8003911001
RS SD15B UNC 4.40 LP2N	60 mm	8005211001
RS SD25B UNC 4.40 LP2N	80 mm	8005191001
RS SD37B UNC 4.40 LP2N	110 mm	8003891001
RS SD50B UNC 4.40 LP2N	154 mm	8005171001

Note

Accessories

Note


Note

Refer to the „Universal cables PAC-UNIV“ section in chapter F

Note


Refer to the „Universal cables PAC-UNIV“ section in chapter F

RSSD/ COMPACT



N: Number of poles

RSSD / RS45



N: Number of poles

D-sub connectors, acc. to IEC 60807 / DIN 41652

LP3R 5.08mm

100 V

1.5 A

0...55°C

-40...70 °C

CE; EAC

100 V

II

2

0.8 kV

0.13 mm² / 6 mm²

TS 35, TS 32

87 mm / 80 mm

D-sub connectors, acc. to IEC 60807 / DIN 41652

LPK 2H 5.08mm

100 V

1.5 A

0...55°C

-40...70 °C

CE; EAC

100 V

II

2

0.8 kV

0.15 mm² / 1.5 mm²

TS 35

45 mm / 65.5 mm

Type	Length	Order No.
RS SD9S LP3R	40 mm	8019930000
RS SD15S LP3R	45 mm	8019940000
RS SD25S LP3R	60 mm	8019950000
RS SD37S LP3R	80 mm	8019960000
RS SD50S LP3R	145 mm	8019970000
RS SD9B LP3R	40 mm	8019880000
RS SD15B LP3R	45 mm	8019890000
RS SD25B LP3R	60 mm	8019900000
RS SD37B LP3R	80 mm	8019910000
RS SD50B LP3R	100 mm	8019920000

Type	Length	Order No.
RS SD9S UNC LPK2	50 mm	8259010000
RS SD15S UNC LPK2	61 mm	8233350000
RS SD25S UNC LPK2	86 mm	8155650000
RS SD37S UNC LPK2	116 mm	8155660000
RS SD50S UNC LPK2	154 mm	8155670000
RS SD9B UNC LPK2	50 mm	8216480000
RS SD15B UNC LPK2	61 mm	8209730000
RS SD25B UNC LPK2	86 mm	8155620000
RS SD37B UNC LPK2	116 mm	8155630000
RS SD50B UNC LPK2	45 mm	8155640000

Refer to the „Universal cables PAC-UNIV“ section in chapter F


Refer to the „Universal cables PAC-UNIV“ section in chapter F

RS SD HD - Interface for connector SUB-D high density

Interface for connector
SUB-D high-density

- Connection 1:1
- 15,26,44,62 poles
- Screw connection

RS SD HD

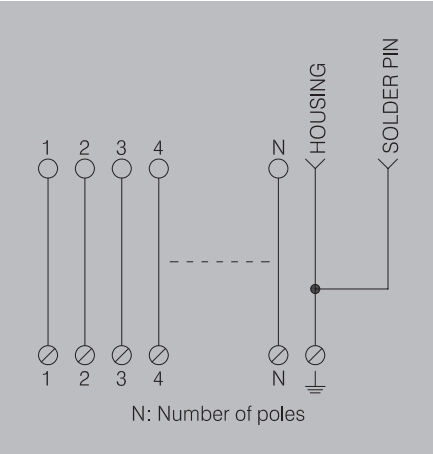

Technical data

Connection data
Connection on control side
Connection (field side)
Rated data
Operating voltage
Operating current per connection
General data
Ambient temperature (operational)
Storage temperature
Approvals
Insulation coordination (EN 50178)
Rated insulation voltage
Surge voltage category
Pollution severity level
Pulse voltage test (1,2/50µs)
Dimensions
Clamping range, min./max. (field)
Mounting rail
Width x height
Note

High-density SUB-D plug-in connectors
LP3R 5.08mm
125 V AC / 175 V DC
1 A
-25...50°C
-40...60 °C
CE; EAC
125V AC / 175 V DC
II
2
1.15 kV
0.13 mm² / 6 mm²
TS 32, TS 35
70 mm / 71 mm

Ordering data

15-pole male connector
26-pole male connector
44-pole male connector
62-pole male connector
15-pole female connector
26-pole female connector
44-pole female connector
62-pole female connector

Type	Length	Order No.
RS SD15M HD UNC4.40 S	40 mm	1428080000
RS SD26M HD UNC4.40 S	55 mm	1428090000
RS SD44M HD UNC4.40 S	95 mm	1428110000
RS SD62M HD UNC4.40 S	135 mm	1428120000
RS SD15F HD UNC4.40 S	40 mm	1428130000
RS SD26F HD UNC4.40 S	55 mm	1428140000
RS SD44F HD UNC4.40 S	95 mm	1428150000
RS SD62F HD UNC4.40 S	135 mm	1428160000

Note

Accessories

Note


Note

Refer to the „Universal cables PAC-UNIV“ section in chapter F


RS RJ45 - Interfaces with RJ45 connector

- Interface for the screw connection of communication devices
- Phosphor-bronze connector 6 μ AU
- Data rate Cat5 100 Mbit

RS RJ45

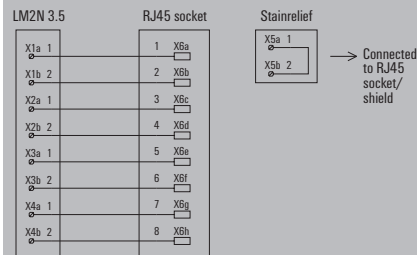

RS RJ45 2WAY



Technical data

Connection data

Connection on control side
Connection (field side)

Rated data

Operating voltage
Operating current per connection

General data

Ambient temperature (operational)
Storage temperature
Approvals

Insulation coordination (EN 50178)

Rated insulation voltage
Surge voltage category
Pollution severity level
Pulse voltage test (1,2/50 μ s)

Dimensions

Clamping range, min./max. (field)
Mounting rail
Width x height

Note

RJ45 plug-in connectors
LM2N 3.5mm

50 V
1 A

0...55 °C
-40...70 °C
CE; EAC

< 50 V AC
III
2
0.8 kV

Screw connection

0.08 mm² / 2.08 mm²
TS 35
70 mm / 48 mm
Connect shielding of data line to protective earth at one end

2 x RJ45 connector
2 x RJ45 plug-in connectors

50 V
1 A

0...55 °C
-40...70 °C
CE; EAC

< 50 V AC
III
2
0.8 kV

TS 35
45 mm / 44.2 mm

Connect shielding of data line to protective earth at one end

Ordering data

Type	Length	Order No.
RS RJ45	30 mm	8611320000

Type	Length	Order No.
RS RJ45 2WAY	46.8 mm	8555440000

Note

Accessories

Note

RS ELCO - Interface with ELCO plug-in connectors

RS ELCO - Interface
with male ELCO plug-in connectors

Passive interface for transporting signals originating from a male ELCO plug-in connector to screw or tension clamp connection techniques.

- Family with male plug-in connectors with 20, 38, 56 and 90 poles
- The connector is polarised to avoid errors in the connection (Position 1)
- High resistance to vibration and low contact resistance

RS ELCO S



RS ELCO Z



Technical data

Rated data
Operating voltage
Operating current per connection
General data
Ambient temperature (operational)
Storage temperature
Approvals
Insulation coordination (EN 50178)
Rated insulation voltage
Surge voltage category
Pollution severity level
Pulse voltage test (1,2/50µs)

150 V AC / 200 V DC
1.5 A
-25...50°C
-40...60 °C
CE; EAC
< 150 V AC
II
2
2.5 kV

150 V AC / 200 V DC
1.5 A
-25...50°C
-40...60 °C
CE; EAC
< 150 V AC
II
2
2.5 kV

Dimensions
Clamping range, min./max. (field)
Mounting rail
Width x height
Note

Screw connection
0.13 mm² / 6 mm²
TS 32, TS 35
70 mm / 60 mm
Polarizer in position 1

Tension-clamp connection
0.13 mm² / 2.5 mm²
TS 32, TS 35
70 mm / 60 mm
Polarizer in position 1

Ordering data

	20-pole Right
	20-pole Left
	38-pole Right
	38-pole Left
	56-pole Right
	56-pole Left
	56-pole Right
	56-pole Left
	56-pole Right
	56-pole Left
	56-pole Right
	56-pole Left
	90-pole Right
	90-pole Left
Note	

Type	Length	Order No.
RS ELCO 20/20RM S	60 mm	1126610000
RS ELCO 20/20LM S	60 mm	1126630000
RS ELCO 38/38RM S	105 mm	1126650000
RS ELCO 38/38LM S	105 mm	1126670000
RS ELCO 56/32RM S	95 mm	1126690000
RS ELCO 56/32LM S	95 mm	1126710000
RS ELCO 56/54RM S	155 mm	1126730000
RS ELCO 56/54LM S	155 mm	1126750000
RS ELCO 56/56RM S	155 mm	1126770000
RS ELCO 56/56LM S	155 mm	1126790000
Note		

Type	Length	Order No.
RS ELCO 20/20RM Z	60 mm	1126620000
RS ELCO 20/20LM Z	60 mm	1126640000
RS ELCO 38/38RM Z	105 mm	1126660000
RS ELCO 38/38LM Z	105 mm	1126680000
RS ELCO 56/32RM Z	95 mm	1126700000
RS ELCO 56/32LM Z	95 mm	1126720000
RS ELCO 56/54RM Z	155 mm	1126740000
RS ELCO 56/54LM Z	155 mm	1126760000
RS ELCO 56/56RM Z	155 mm	1126780000
RS ELCO 56/56LM Z	155 mm	1126800000
Note		


Accessories

Note

Refer to the „Universal cables PAC-ELCO“ section in chapter F

Refer to the „Universal cables PAC-ELCO“ section in chapter F

RS ELCO 90/90 S



150 V AC / 200 V DC
0.5 A
-25...50 °C
-40...60 °C
CE; EAC
< 150 V AC
II
2
2.5 kV

Screw connection
0.13 mm ² / 6 mm ²
TS 32, TS 35
109 mm / 76 mm
Polarizer in position 1

Type	Length	Order No.
RS ELCO 90/90RM S	242 mm	1126810000
RS ELCO 90/90LM S	242 mm	1126870000

Refer to the „Universal cables PAC-ELCO“ section in chapter F

RS ELCO 90/90 Z



150 V AC / 200 V DC
0.5 A
-25...50 °C
-40...60 °C
CE, EAC
< 150 V AC
II
2
2.5 kV

Tension-clamp connection
0.13 mm ² / 2.5 mm ²
TS 32, TS 35
109 mm / 76 mm
Polarizer in position 1

[illegible]

Refer to the „Universal cables PAC-ELCO“ section in chapter F

RS ELCO - Interface with ELCO plug-in connectors

RS ELCO - Interface
with female ELCO plug-in connectors

Passive interfaces for transmitting signals from a plug-in ELCO female connector to a screw connection.

- Family of 20, 38, to 56-pole female plug-in connectors
- Polarisation of the connector to prevent errors in connection (position 1)
- High resistance to vibration and low contact resistance

RS ELCO F



RS ELCO F 56



Technical data

Rated data
Operating voltage
Operating current per connection
General data
Ambient temperature (operational)
Storage temperature
Approvals
Insulation coordination (EN 50178)
Rated insulation voltage
Surge voltage category
Pollution severity level
Pulse voltage test (1,2/50µs)

150 V AC / 200 V DC
1.5 A
-25...50°C
-40...60 °C
CE; EAC
< 150 V AC
II
2
2.5 kV

150 V AC / 200 V DC
5 A
-25...50°C
-40...60 °C
CE; EAC
< 150 V AC
II
2
2.5 kV

Dimensions
Clamping range, min./max. (field)
Mounting rail
Width x height
Note

0.13 mm² / 6 mm²
TS 32, TS 35
70 mm / 60 mm
Polariser in position 1

0.13 mm² / 6 mm²
TS 32, TS 35
70 mm / 60 mm
Polariser in position 1

Ordering data

20-pole Right
20-pole Left
38-pole Right
38-pole Left
56-pole Right
56-pole Left

Type	Length	Order No.
RS ELCOF 20/20RM S	60 mm	1480740000
RS ELCOF 20/20LM S	60 mm	1480750000
RS ELCOF 38/38RM S	105 mm	1480760000
RS ELCOF 38/38LM S	105 mm	1480770000

Type	Length	Order No.
RS ELCOF 56/56RM S	155 mm	1480780000
RS ELCOF 56/56LM S	155 mm	1480790000

Note

Accessories

Note

Note

Refer to the "PAC-ELCO universal cables" section in this chapter
--

Note

Refer to the "PAC-ELCO universal cables" section in this chapter
--

Pin assignment


ELCO connector 20-pole	RS ELCO 20/20RM S/Z RS ELCO 20/20LM S/Z RS ELCOF 20/20RM S RS ELCOF 20/20LM S
A	1
B	2
C	3
D	4
E	5
F	6
H	7
J	8
K	9
L	10
M	11
N	12
P	13
R	14
S	15
T	16
U	17
V	18
W	19
X	20
Note	

ELCO connector 38-pole	RS ELCO 38/38RM S/Z RS ELCO 38/38LM S/Z RS ELCOF 38/38RM S RS ELCOF 38/38LM S
A	1
B	2
C	3
D	4
E	5
F	6
H	7
J	8
K	9
L	10
M	11
N	12
P	13
R	14
S	15
T	16
U	17
V	18
W	19
X	20
Y	21
Z	22
AA	23
BB	24
CC	25
DD	26
EE	27
FF	28
HH	29
JJ	30
KK	31
LL	32
MM	33
NN	34
PP	35
RR	36
SS	37
TT	38
Note	


ELCO connector 56-pole	RS ELCO 56/32RM S/Z RS ELCO 56/32LM S/Z	RS ELCO 56/54RM S/Z RS ELCO 56/54LM S/Z	RS ELCO 56/56RM S/Z RS ELCO 56/56LM S/Z
A	1	1	1
B	2	2	2
C	3	3	3
D	4	4	4
E	5	5	5
F	6	6	6
H	7	7	7
J	8	8	8
K	9	9	9
L	10	10	10
M	11	11	11
N	12	12	12
P	13	13	13
R	14	14	14
S	15	15	15
T	16	16	16
U	17	17	17
V	18	18	18
W	19	19	19
X	20	20	20
Y	Y	YY	21
Z	21	-	22
a	22	21	23
b	23	22	24
c	24	23	25
d	25	24	26
e	26	25	27
f	27	26	28
h	28	27	29
j	29	28	30
k	30	29	31
l	31	30	32
m	32	31	33
n	-	32	34
p	-	33	35
r	-	34	36
s	-	35	37
t	-	36	38
u	-	37	39
v	-	38	40
w	-	39	41
x	-	40	42
y	-	41	43
z	-	42	44
AA	-	43	45
BB	-	44	46
CC	-	45	47
DD	-	46	48
EE	-	47	49
FF	-	48	50
HH	-	49	51
JJ	-	50	52
KK	-	51	53
LL	-	52	54
MM	-	53	55
NN	Y	54	56
Note			

ELCO connector 90-pole	RS ELCO 90/90RM S/Z RS ELCO 90/90LM S/Z
A	1
B	2
C	3
D	4
E	5
F	6
H	7
J	8
K	9
L	10
M	11
N	12
P	13
R	14
S	15
T	16
U	17
V	18
W	19
X	20
Y	21
Z	22
AA	23
AB	24
AC	25
AD	26
AE	27
AF	28
AH	29
AJ	30
AK	31
AL	32
AM	33
AN	34
AP	35
AR	36
AS	37
AT	38
AU	39
AV	40
AW	41
AX	42
AY	43
AZ	44
BA	45
BB	46
BC	47
BD	48
BE	49
BF	50
BH	51
BJ	52
BK	53
BL	54
BM	55
BN	56
BP	57
BR	58
BS	59
BT	60
BU	61
BV	62
BW	63
BX	64
BY	65
BZ	66
CA	67
CB	68
CC	69
CD	70
CE	71
CF	72
CH	73
CJ	74
CK	75
CL	76
CM	77
CN	78
CP	79
CR	80
CS	81
CT	82
CU	83
CV	84
CW	85
CX	86
CY	87
CZ	88
DA	89
DB	90
Note	


RS ELCO male connector: Dimensional Drawings

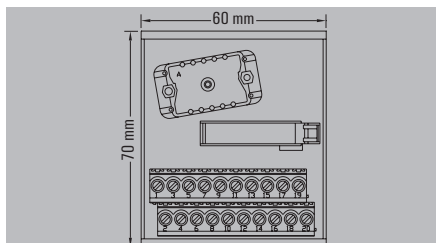


ELCO 20/20L LEFT

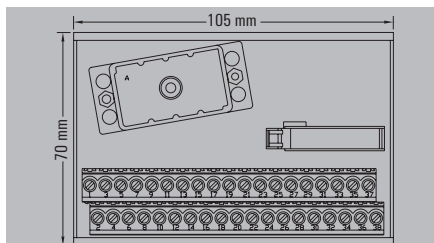


ELCO 38/38L LEFT

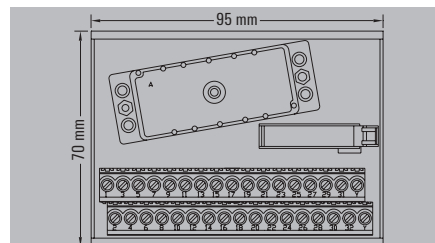


ELCO 56/32L LEFT

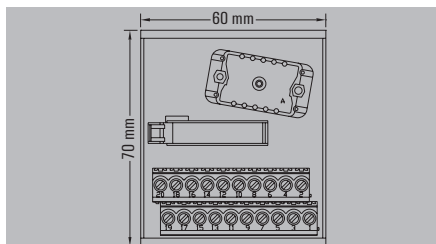


ELCO 20/20R RIGHT

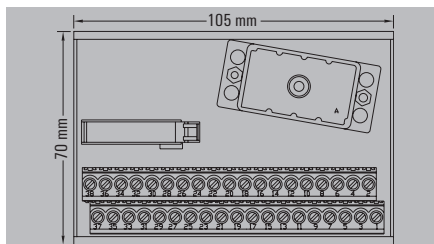


ELCO 38/38R RIGHT

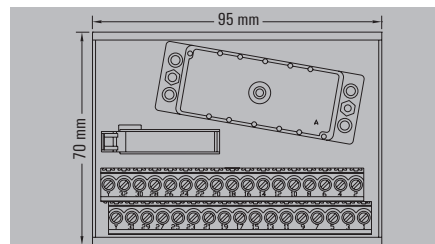


ELCO 56/32R RIGHT

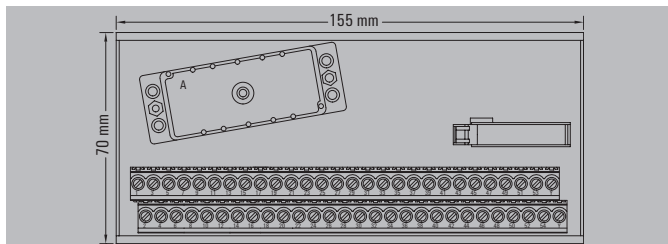


ELCO 56/54L LEFT

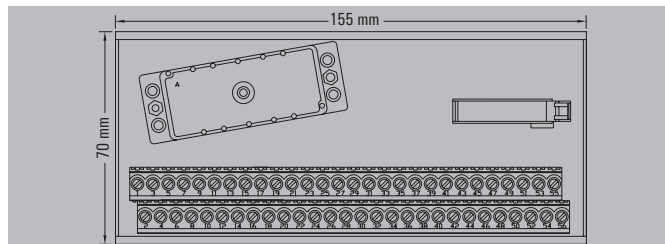


ELCO 56/56L LEFT

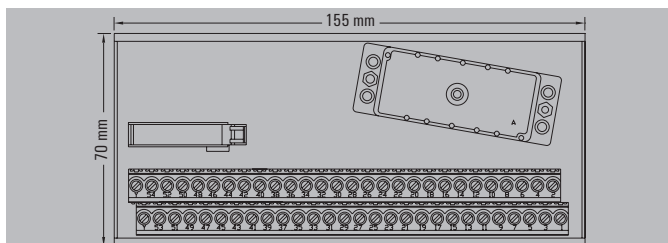


ELCO 56/54R RIGHT

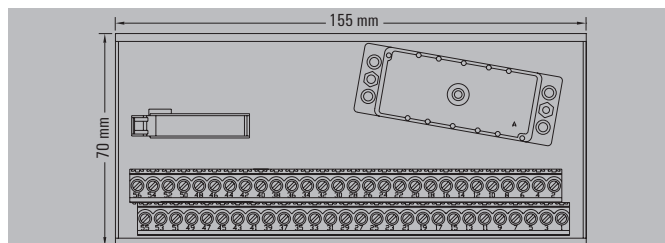

ELCO 56/56R RIGHT

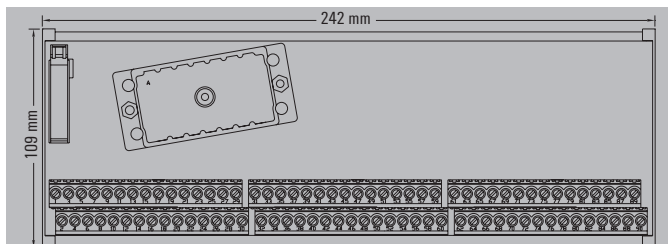


ELCO 90/90L LEFT

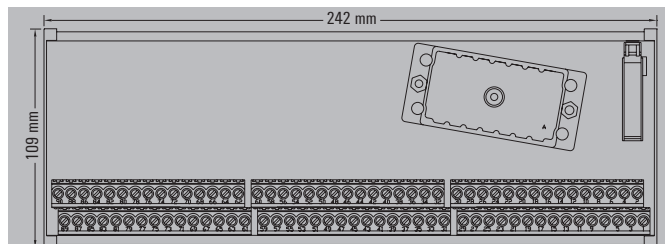


ELCO 90/90R RIGHT


RS ELCOF female connector: Dimensional Drawings

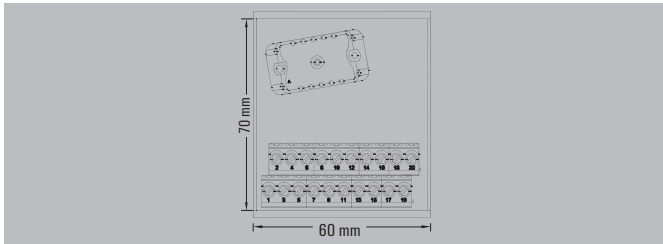


RS ELCOF 20/20LM S

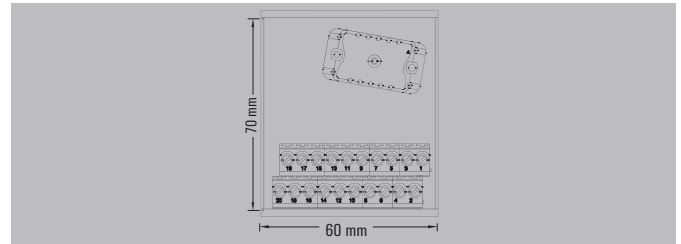


RS ELCOF 20/20RM S

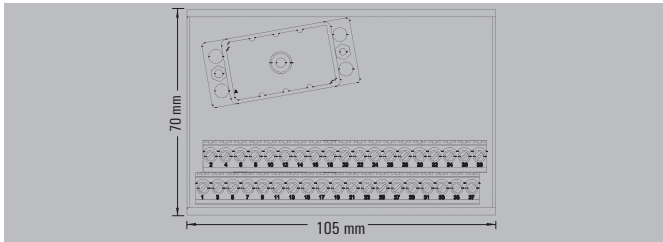


RS ELCOF 38/38LM S

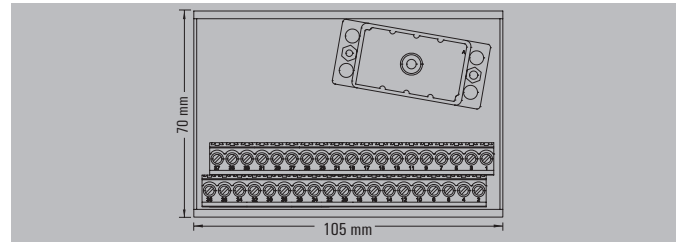

RS ELCOF 38/38RM S

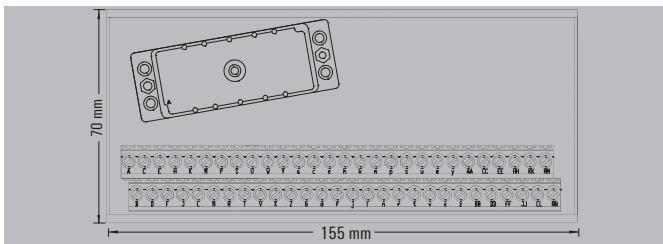

RS ELCOF 56/56LM S

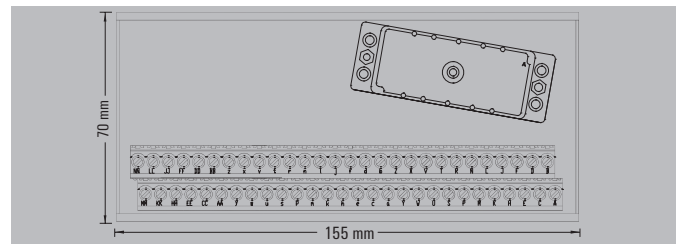


RS ELCOF 56/56RM S

RS VERT - Supply voltage distributor modules


RS VERT - 2 potentials

- Distribution module with 2, 4 or 6 potentials
- Distribution current from 10 to 120 A
- Screw or tension clamp connection

RS VERT 2P/ 8P1-8P2 S

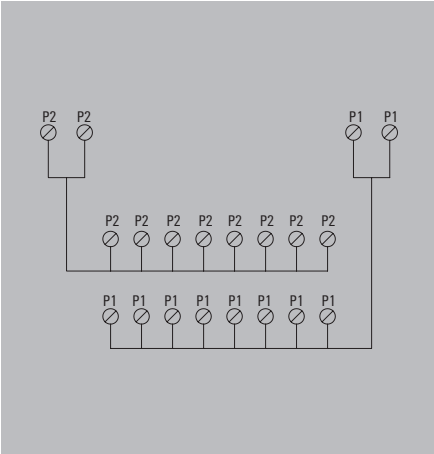

RS VERT 2P/ 16P1-16P2 S

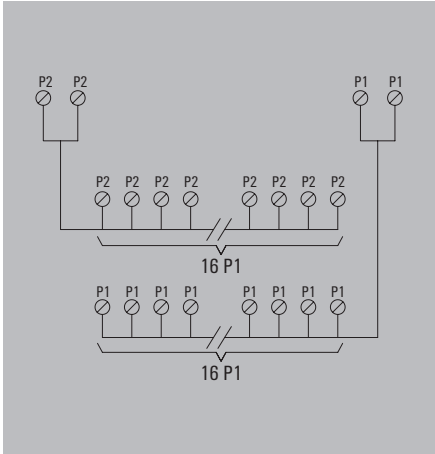

Technical data

Rated data	
Operating voltage	max. 30 V
Maximum current per distributor connection	5 A
Maximum current per potential connection	5 A
Total operating current	10 A
General data	
Ambient temperature (operational)	0...55°C
Storage temperature	-40...60 °C
Approvals	CE; EAC
Insulation coordination (EN 50178)	
Rated insulation voltage	< 50 V AC
Surge voltage category	III
Pollution severity level	2
Pulse voltage test (1,2/50µs)	0.8 kV

Rated data	
Operating voltage	max. 30 V
Maximum current per distributor connection	5 A
Maximum current per potential connection	5 A
Total operating current	10 A
General data	
Ambient temperature (operational)	0...55°C
Storage temperature	-40...60 °C
Approvals	CE; EAC
Insulation coordination (EN 50178)	
Rated insulation voltage	< 50 V AC
Surge voltage category	III
Pollution severity level	2
Pulse voltage test (1,2/50µs)	0.8 kV

Rated data	
Operating voltage	max. 30 V
Maximum current per distributor connection	5 A
Maximum current per potential connection	5 A
Total operating current	10 A
General data	
Ambient temperature (operational)	0...55°C
Storage temperature	-40...60 °C
Approvals	CE; EAC
Insulation coordination (EN 50178)	
Rated insulation voltage	< 50 V AC
Surge voltage category	III
Pollution severity level	2
Pulse voltage test (1,2/50µs)	0.8 kV

Dimensions
Clamping range, min./max. (field)
Clamping range, min./max. (supply)
Mounting rail
Length x width
Note

Screw connection
0.15 mm² / 1.5 mm²
0.15 mm² / 1.5 mm²
TS 35
51.5 mm / 45 mm
The module may be used for a nominal voltage of 250 V AC, considering an overvoltage category of II

Screw connection
0.15 mm² / 1.5 mm²
0.15 mm² / 1.5 mm²
TS 35
92.5 mm / 45 mm
The module may be used for a nominal voltage of 250 V AC, considering an overvoltage category of II

Ordering data

Screw connection

Type	Height	Order No.
RS VERT8 LPK2	64 mm	8252010000

Type	Height	Order No.
RS VERT16 LPK2	64 mm	8234620000

Note

Accessories

Note

Note

Note



Note

Note

RS VERT - 2 potentials

- Distribution module with 2, 4 or 6 potentials
- Distribution current from 10 to 120 A
- Screw or tension clamp connection

RS VERT 2P/ 72P1 -72P2 S

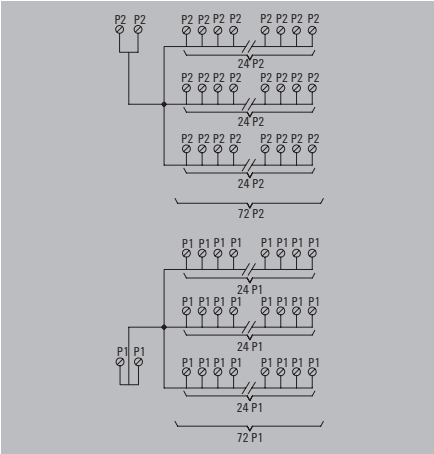

Technical data

Rated data	
Operating voltage	≤ 250 V DC ≤ 250 V AC
Maximum current per distributor connection	10 A
Maximum current per potential connection	10 A
Total operating current	20 A
General data	
Ambient temperature (operational)	0...55°C
Storage temperature	-40...60 °C
Approvals	CE; EAC
Insulation coordination (EN 50178)	
Rated insulation voltage	< 300 V AC
Surge voltage category	III
Pollution severity level	2
Pulse voltage test (1,2/50µs)	4 kV

≤ 250 V DC ≤ 250 V AC
10 A
10 A
20 A
0...55°C
-40...60 °C
CE; EAC
< 300 V AC
III
2
4 kV

Dimensions	
Clamping range, min./max. (field)	0.15 mm² / 1.5 mm²
Clamping range, min./max. (supply)	0.15 mm² / 6 mm²
Mounting rail	TS 32, TS 35
Length x width	160 mm / 109 mm
Note	

Screw connection
0.15 mm ² / 1.5 mm ²
0.15 mm ² / 6 mm ²
TS 32, TS 35
160 mm / 109 mm

Ordering data

Screw connection

Type	Height	Order No.
RS LPK3/144 VERT	68 mm	8199510000

Note

Accessories



Note

RS VERT - Supply voltage distributor modules



RS VERT - 4 and 6 potentials

- Distribution module with 4 or 6 potentials
- Distribution current from 10 to 120 A
- Screw or tension clamp connection

RS VERT 4P/4X20P S/Z

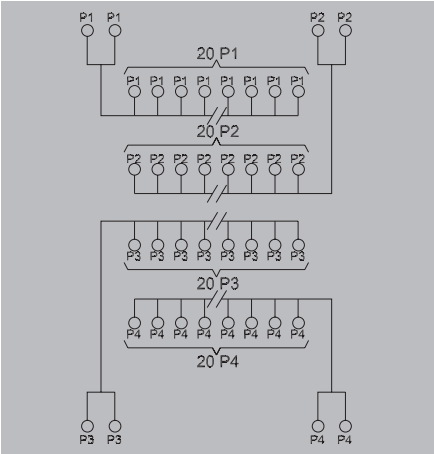

RS VERT 6P/6X12P S/Z

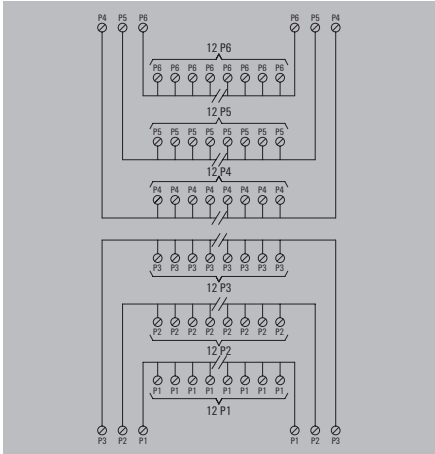

Technical data

Rated data	
Operating voltage	< 600 V AC
Maximum current per distributor connection	15 A
Maximum current per potential connection	30 A
Total operating current	120 A
General data	
Ambient temperature (operational)	-25...50 °C
Storage temperature	-40...60 °C
Approvals	CE; EAC
Insulation coordination (EN 50178)	
Rated insulation voltage	< 600 V AC
Surge voltage category	III
Pollution severity level	2
Pulse voltage test (1,2/50µs)	6 kV

Rated data	
Operating voltage	< 600 V AC
Maximum current per distributor connection	15 A
Maximum current per potential connection	30 A
Total operating current	120 A
General data	
Ambient temperature (operational)	-25...50 °C
Storage temperature	-40...60 °C
Approvals	CE; EAC
Insulation coordination (EN 50178)	
Rated insulation voltage	< 600 V AC
Surge voltage category	III
Pollution severity level	2
Pulse voltage test (1,2/50µs)	6 kV

Rated data	
Operating voltage	250 V AC
Maximum current per distributor connection	15 A
Maximum current per potential connection	20 A
Total operating current	120 A
General data	
Ambient temperature (operational)	-25...50 °C
Storage temperature	-40...60 °C
Approvals	CE; EAC
Insulation coordination (EN 50178)	
Rated insulation voltage	< 300 V AC
Surge voltage category	III
Pollution severity level	2
Pulse voltage test (1,2/50µs)	4 kV

Dimensions
Clamping range, min./max. (field)
Clamping range, min./max. (supply)
Mounting rail
Length x width
Note

Screw connection	Tension clamp conn.
0.13 mm ² / 6 mm ²	0.13 mm ² / 2.5 mm ²
0.13 mm ² / 6 mm ²	0.13 mm ² / 6 mm ²
TS 32, TS 35	TS 32, TS 35
145 mm / 70 mm	145 mm / 70 mm

Screw connection	Tension clamp conn.
0.13 mm ² / 6 mm ²	0.13 mm ² / 2.5 mm ²
0.13 mm ² / 6 mm ²	0.13 mm ² / 6 mm ²
TS 32, TS 35	TS 32, TS 35
122 mm / 87 mm	122 mm / 87 mm

Ordering data

Type	Height	Order No.
RS VERT 4P 20X4 S	55 mm	1128100000
RS VERT 4P 20X4 Z	52 mm	1128110000

Type	Height	Order No.
RS VERT 4P 20X4 S	55 mm	1128100000
RS VERT 4P 20X4 Z	52 mm	1128110000

Type	Height	Order No.
RS VERT 6P 12X6 S	83 mm	1128120000
RS VERT 6P 12X6 Z	75 mm	1128130000

Note

Note

Note

Accessories

Note

Note

Note



RSD - interfaces with diodes

Diode bases for current peak protection, lamp tests or preventing reverse polarity.


- Diode 1N4007
- Mounting on TS32/35

RSD A / RSD K

Common anode or cathode





RSD A



RSD K

RSD

Independent diodes



Technical data

Rated data
Operating voltage
Operating current per connection
General data
Ambient temperature (operational)
Storage temperature
Approvals
Insulation coordination (EN 50178)
Rated insulation voltage
Surge voltage category
Pollution severity level
Pulse voltage test (1,2/50µs)

230 V
1 A
0...55°C
-40...60 °C
CE; EAC
230 V
II
2
2 kV

230 V
1 A
0...55°C
-40...60 °C
CE; EAC
230 V
II
2
2 kV

Dimensions

Clamping range, min./max. (field)
Mounting rail
Width x height
Note

0.13 mm² / 6 mm²
TS 32, TS 35
70 mm / 42 mm

0.13 mm² / 6 mm²
TS 32, TS 35
70 mm / 42 mm

Ordering data

10 independent diodes
12 independent diodes
20 independent diodes
40 independent diodes
5 A diodes (shared plus pole)
5 K diodes (shared negative pole)
10 A diodes (shared plus pole)
10 K diodes (shared negative pole)
20 A diodes (shared plus pole)
20 K diodes (shared negative pole)
22 A diodes (shared plus pole)
22 K diodes (shared negative pole)
Note

Type	Length	Order No.
RSD A5 LP/LP	20 mm	1312740000
RSD K5 LP/LP	20 mm	1312750000
RSD A10 LP/LP	35 mm	1312760000
RSD K10 LP/LP	35 mm	1312770000
RSD A20 LP/LP	60 mm	1312780000
RSD K20 LP/LP	60 mm	1312790000
RSD A22 LP/LP	65 mm	0180961001
RSD K22 LP/LP	65 mm	0181061001

Type	Length	Order No.
RSD 10 LP/LP	60 mm	8022901001
RSD 12 LP/LP	65 mm	0181461001
RSD 20 LP/LP	120 mm	8022911001
RSD 40 LP/LP	220 mm	8022921001

Accessories

Note

Note

Note

Isolated Interfaces and solutions for general applications

Isolated Interfaces and solutions for general applications	RSM/RSMS multiple relay modules – General description	E.2
	RSM multiple relay modules – Interfaces with 12,5mm relays (RCL)	E.5
	RSMS multiple relay modules – Interfaces with 6,1mm relays (RCL)	E.13
	TERMSERIES PLC'S system cables – General description	E.16
	TERMSERIES PLC'S system cables – Selection tables	E.18
	PLC ABB S800 – Selection table	E.19
	PLC EMERSON DELTA V – Selection table	E.20
	PLC GEFANUC 90-30 – Selection table	E.21
	PLC GEFANUC RX3I – Selection table	E.23
	PLC HONEYWELL C200 – Selection table	E.25
	PLC HONEYWELL C300 – Selection table	E.26
	PLC MITSUBISHI MELSEC Q – Selection table	E.28
	PLC OMRON CJ1W – Selection table	E.30
	PLC ROCKWELL COMPACT LOGIX – Selection table	E.34
	PLC ROCKWELL CONTROL LOGIX – Selection table	E.36
	PLC SCHNEIDER M340 – Selection table	E.38
	PLC SCHNEIDER PREMIUM – Selection table	E.40
	PLC SCHNEIDER QUANTUM – Selection table	E.41
	PLC SIEMENS S7-300 – Selection table	E.42
	PLC SIEMENS S7-400 – Selection table	E.44
	PLC SIEMENS S7-1500 – Selection table	E.45
	PLC YOKOGAWA CENTUM – Selection table	E.46
	PLC YOKOGAWA STARDOM – Selection table	E.47
	PLC WEIDMÜLLER U-REMOTE – Selection table	E.48
	TERMSERIES adapters	E.50
	TERMSERIES – relays modules from 6mm width	E.54

Connecting relay modules to controls in a compact fashion

It's child's play with our RSM multiple relay modules

You want relay modules that save space and can be wired with minimal effort. Our compact RSM modules save time and money. Let's connect.

A growing number of applications require dense wiring to be connected in a very small space, in a very short time. Our RSM relay modules form interfaces with 4, 8 or 16 electromechanical and/or solid-state relays.

E

Our RSM modules are extremely compact. For quick wiring, the DC variants come with a shared positive or negative potential. An optional IEC603-13 plug-in connector allows pre-assembled lines to be connected.

The RSM series comes in various functional variants, making it highly flexible. Available with 1 or 2 CO contacts and a 16/8 A relay (RCL), as a slim 6 A relay (RSS) or with a test button (RCL).



Relay modules that save a lot of space



A growing number of applications require dense wiring to be connected in a very small space, in a very short time – for instance in machinery, process and conventional power stations. RSM relay modules allow extremely compact solutions.

Fast, safe and easy connection.

With PAC-UNIV pre-assembled cables, it's easy to connect the interfaces to almost any controller on the market.


**Clear marking**

One green LED per channel ensures that each contact is clearly identified.

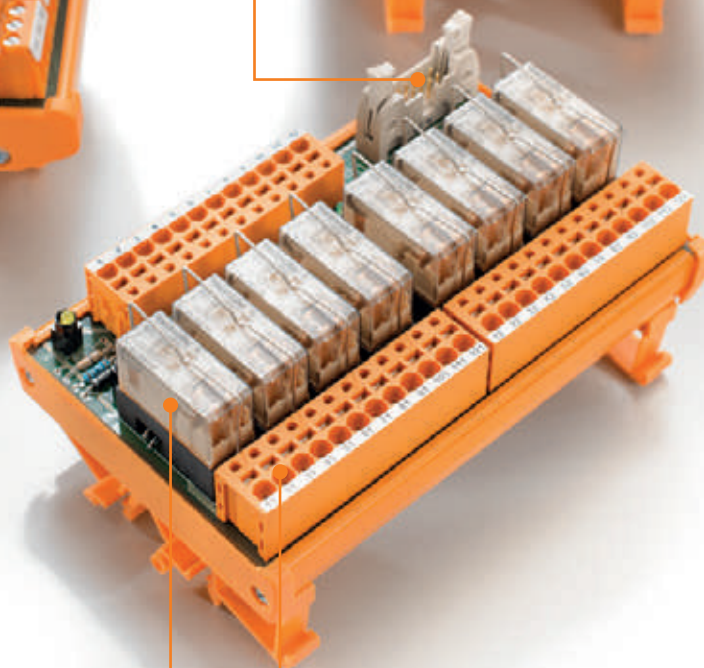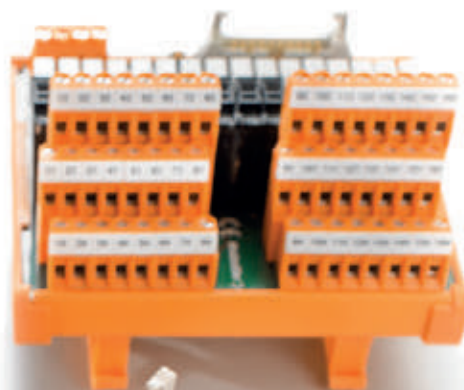**Excellent electrical properties**


Galvanic isolation with electromechanical or solid-state relay allows the voltage of the controller to be adjusted to that of the field elements (e.g. sensors).

PUSH IN connection
for 1 changeover version



RSM 1CO/2CO – Relay interface**1 or 2 changeover**


- Interface from 4 to 16 electromechanical relays
- 1 or 2 changeover
- Positive or negative switching or ac/dc
- With optional test button with latching function (RCL relays)
- Empty boards available (BASE)
- Flat-connector available to make easy the connection to PLC'S
- Compatible with solid-state relays
- Screw and "PUSH IN" for 1 changeover
- Screw and tension clamp for 2 changeover

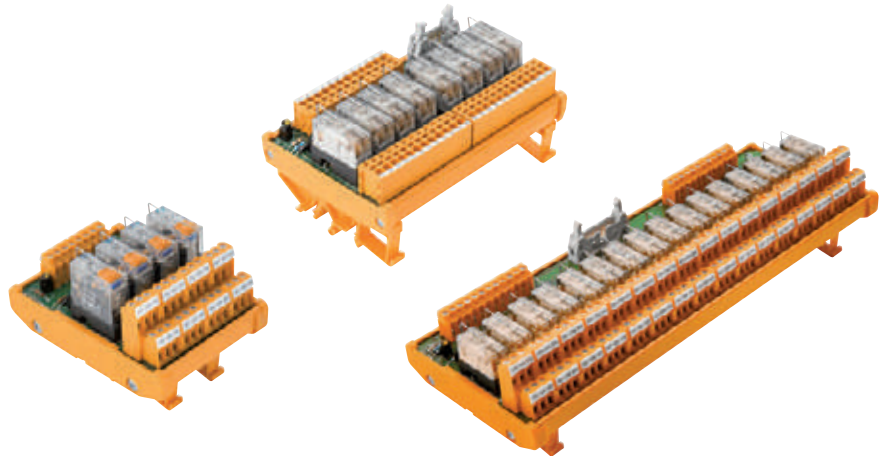**General technical data**

General features	
Relay	
LED status display per channel	
LED status of the supply voltage	
Nominal output data	
Contact material	AgNi 90/10
Operative voltage	250 V AC
Max. AC continuous current	6 A
Minimum contact current	100 mA
Minimum contact voltage	5 V DC
Mechanical service life (dc coil)	30 x 10 ⁶ / 10 x 10 ⁶ (RCL) switchings
Mechanical service life (ac coil)	10 x 10 ⁶ / 5 x 10 ⁶ (RCL) switching cycles
Operating temperature	-25...+50 °C
Storage temperature	-40...+60 °C
Insulation coordination (EN 50178)	
Rated input insulation voltage	< 50 V AC
Rated output insulation voltage	250 V AC
Overvoltage category input/output	III
Overvoltage category input/output	II
Pollution severity level	2
Impulse voltage test (1.2/50µs)	6 kV
Insulation test voltage	1.2 kV AC
Clearance input/output	≥ 5.5 mm
Dimensions	
Clamping range, min. [Field]/ Clamping range, max. [Field]	0.13 mm ² / 6 mm ²
Clamping range, min. [supply]/Clamping range, max. [supply]	0.13 mm ² / 6 mm ²
Mounting rail	TS 32 / TS 35
Width / height	87 x 66
Width / height (RCL)	87 x 77
Width / height (BASE)	87 x 53
Note	
Electromechanical relays: 12 V DC: Spare relay RCL314012 8693240000; 24 V DC: Spare relay RCL314024 8693260000; 24 V AC/DC: Spare relay relay RCL314024 8693260000; 48 V DC: Spare relay RCL31404 8693380000; 115 V AC/DC: Spare relay RT314110 4058500000; 230 V AC: Spare relay RCL314730 8693320000. Solid-state relays: SSR 24 V DC/0-24 V DC 3.5 A 1132310000; SSR 24 V DC/max. 240 V AC 1 A 113229000. RCL relay: Spare relay RCL374024 8869960000	


RSM multiple relay modules – Interfaces with 12,5mm relays (RCL)

4 Relays – Screw/PUSH IN/Tension clamp

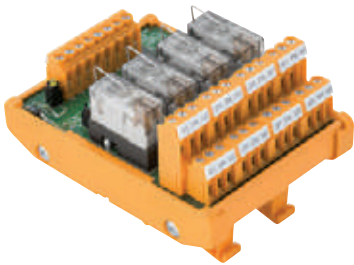


Technical data

Connection control side	LP 5.08 / LMFS 5.08 / LMZF 5.08
Connection field side (1CO)	LP 5.08 / LMFS 5.08 / LMZF 5.08
Connection field side (2CO)	LP2N 5.08 / LM2NZF
Length	69 mm (1CO) / 75 mm (2CO)
12 V DC	
Operating voltage	12 V DC $\pm 10\%$
Rated current (dc)	33 mA
Free wheel diode	Yes
24 V DC	
Operating voltage	24 V DC $\pm 10\%$
Rated current (dc)	16.7 mA
Free wheel diode	Yes
24 V AC/DC	
Operating voltage	24 V AC/DC $\pm 10\%$
Rated current (dc)	22.9 mA
Rated current (ac)	13.9 mA
Free wheel diode	No
48 V DC	
Operating voltage	48 V DC $\pm 10\%$
Rated current (dc)	8.7 mA
Free wheel diode	Yes
115 V AC/DC	
Operating voltage	115 V AC/DC $\pm 10\%$
Rated current (dc)	4.8 mA
Rated current (ac)	3.3 mA
Free wheel diode	No
230 V AC	
Operating voltage	230 V AC $\pm 10\%$
Rated current (ac)	3.3 mA
Free wheel diode	No
Note	

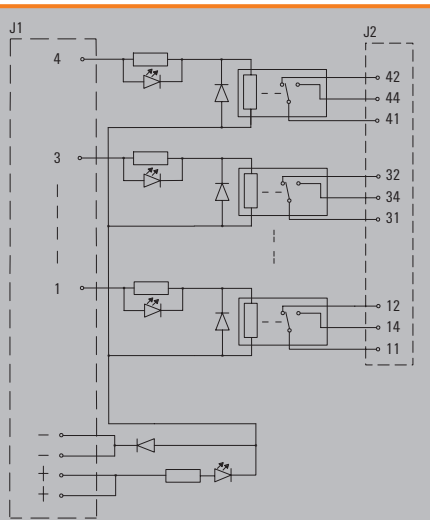


RSM-4 12 V+/24 V+/48 V+ 1CO
RSM-4I 24 V+
RSM-4 24 V+ BASE

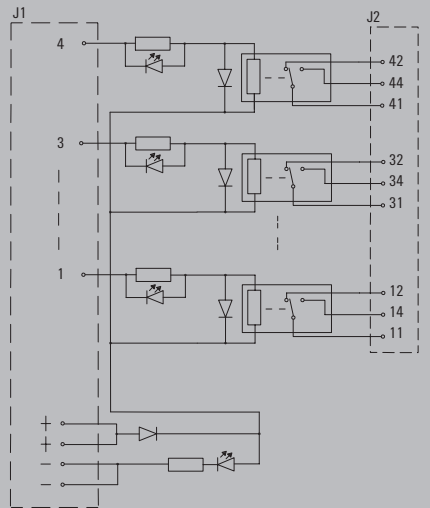


RSM-4 12 V-/24 V-/48 V- 1CO

Ordering data

12 V DC	Type	Screw (S) 1CO	PUSH IN (Z) 1CO	Screw (S) 2CO	Tension clamp (Z) 2CO
12 V DC positive switching (negative common)	RSM-4 12V+	1447400000	1447420000	1448610000	1448630000
12 V DC negative switching (positive common)	RSM-4 12V-	1447410000	1447430000	1448620000	1448640000
24 V DC					
24 V DC positive switching (negative common)	RSM-4 24V+	1447440000	1447470000	1448650000	1448680000
24 V DC negative switching (positive common)	RSM-4 24V-	1447450000	1447480000	1448670000	1448690000
24 V DC positive switching (negative common) with test button	RSM-4I 24V+	1447740000	1447750000	1448820000	1448830000
24 V DC positive switching (negative common) without relays	RSM-4 24V+ BASE	1457430000	1457440000		
24 V AC/DC					
24 V AC/DC	RSM-4 24VAC/DC	1447540000	1447550000	1448740000	1448770000
48 V DC					
48 V DC positive switching (negative common)	RSM-4 48V+	1447500000	1447520000	1448700000	1448720000
48 V DC negative switching (positive common)	RSM-4 48V-	1447510000	1447530000	1448710000	1448730000
115 V AC/DC					
115 VAC/DC	RSM-4 115VAC/DC	1447570000	1447580000	1448780000	1448790000
230 V AC					
230 V AC	RSM-4 230Vac	1447600000	1447610000	1448800000	1448810000
Note					

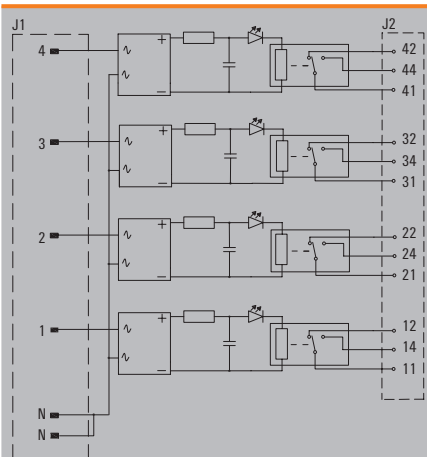


RSM-4 24 V AC/DC 1C0
RSM-4 115 V AC/DC 1C0

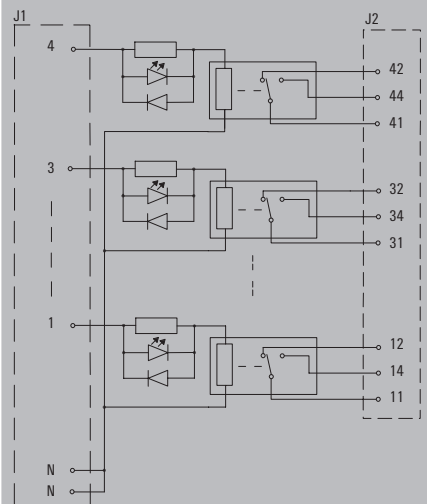


RSM-4 230 V AC 1C0

Note: Contact configuration for 2 changeover versions (2C0)



RSM multiple relay modules – Interfaces with 12,5mm relays (RCL)

8 Relays – Screw/PUSH IN/Tension clamp

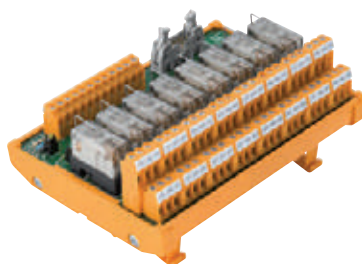


Technical data


Connection control side	Flat connector ¹⁾ 10 poles + LP 5.08 / LMFS 5.08 / LMZF 5.08
Connection field side (1C0)	LP 5.08 / LMFS 5.08 / LMZF 5.08
Connection field side (2C0)	LP2N 5.08 / LM2NZF
Length	130 mm (1C0) / 149 mm (2C0)
12 V DC	
Operating voltage	12 V DC $\pm 10\%$
Rated current (dc)	33 mA
Free wheel diode	Yes
24 V DC	
Operating voltage	24 V DC $\pm 10\%$
Rated current (dc)	16.7 mA
Free wheel diode	Yes
24 V AC/DC	
Operating voltage	24 V AC/DC $\pm 10\%$
Rated current (dc)	22.9 mA
Rated current (ac)	13.9 mA
Free wheel diode	No
48 V DC	
Operating voltage	48 V DC $\pm 10\%$
Rated current (dc)	8.7 mA
Free wheel diode	Yes
115 V AC/DC	
Operating voltage	115 V AC/DC $\pm 10\%$
Rated current (dc)	4.8 mA
Rated current (ac)	3.3 mA
Free wheel diode	No
230 V AC	
Operating voltage	230 V AC $\pm 10\%$
Rated current (ac)	3.3 mA
Free wheel diode	No
Note	1) Flat connector not mounted in 115 V AC/DC and 230 V AC

Ordering data


12 V DC	Type	Screw (S) 1C0	PUSH IN (Z) 1C0	Screw (S) 2C0	Tension clamp (Z) 2C0
12 V DC positive switching (negative common)	RSM-8 12V+	1447820000	1447840000	1448890000	1448910000
12 V DC negative switching (positive common)	RSM-8 12V-	1447830000	1447850000	1448900000	1448920000
24 V DC					
24 V DC positive switching (negative common)	RSM-8 24V+	1447870000	1447890000	1448930000	1448950000
24 V DC negative switching (positive common)	RSM-8 24V-	1447880000	1447900000	1448940000	1448970000
24 V DC positive switching (negative common) with test button	RSM-8I 24V+	1448140000	1448170000	1449100000	1449110000
24 V DC positive switching (negative common) without relays	RSM-8 24V+ BASE	1457370000	1457380000		
24 V AC/DC					
24 V AC/DC	RSM-8 24VAC/DC	1447950000	1447970000	1449030000	1449040000
48 V DC					
48 V DC positive switching (negative common)	RSM-8 48V+	1447910000	1447930000	1448980000	1449010000
48 V DC negative switching (positive common)	RSM-8 48V-	1447920000	1447940000	1448990000	1449020000
115 V AC/DC					
115 VAC/DC	RSM-8 115VAC/DC	1447980000	1447990000	1449050000	1449070000
230 V AC					
230 V AC	RSM-8 230Vac	1448000000	1448010000	1449080000	1449090000
Note					

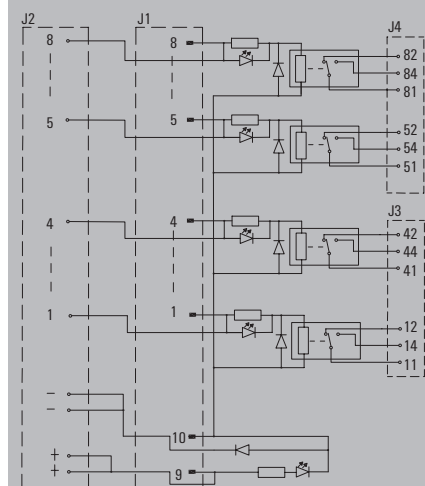


RSM-8 12 V+/24 V+/48 V+ 1C0
RSM-8I 24 V+
RSM-8 24 V+ BASE

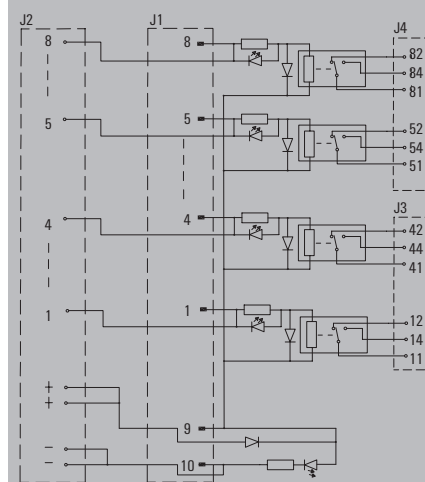


RSM-8 12 V-/24 V-/48 V- 1C0

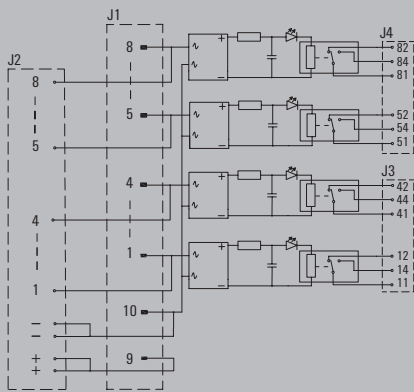

RSM-8 24 V AC/DC 1CO

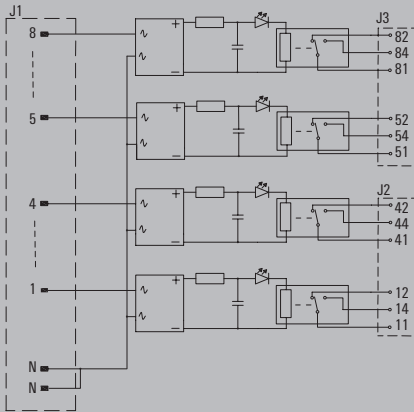


RSM-8 115 V AC/DC 1CO

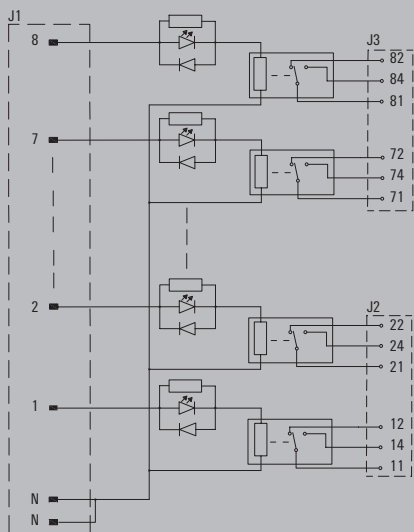

RSM-8 230 V AC 1CO

Note: Contact configuration for 2 changeover versions (2CO)




RSM multiple relay modules – Interfaces with 12,5mm relays (RCL)

16 Relays – Screw/PUSH IN/Tension clamp



Technical data


Connection control side	Flat connector ¹⁾ 20 poles + LP 5.08 / LMFS 5.08 / LMZF 5.08
Connection field side (1CO)	LP 5.08 / LMFS 5.08 / LMZF 5.08
Connection field side (2CO)	LP2N 5.08 / LM2NZF
Length	259 mm (1CO) / 290 mm (2CO)
12 V DC	
Operating voltage	12 V DC $\pm 10\%$
Rated current (dc)	33 mA
Free wheel diode	Yes
24 V DC	
Operating voltage	24 V DC $\pm 10\%$
Rated current (dc)	16.7 mA
Free wheel diode	Yes
24 V AC/DC	
Operating voltage	24 V AC/DC $\pm 10\%$
Rated current (dc)	22.9 mA
Rated current (ac)	13.9 mA
Free wheel diode	No
48 V DC	
Operating voltage	48 V DC $\pm 10\%$
Rated current (dc)	8.7 mA
Free wheel diode	Yes
115 V AC/DC	
Operating voltage	115 V AC/DC $\pm 10\%$
Rated current (dc)	4.8 mA
Rated current (ac)	3.3 mA
Free wheel diode	No
230 V AC	
Operating voltage	230 V AC $\pm 10\%$
Rated current (ac)	3.3 mA
Free wheel diode	No
Note	1) Flat connector not mounted in 115 V AC/DC and 230 V AC

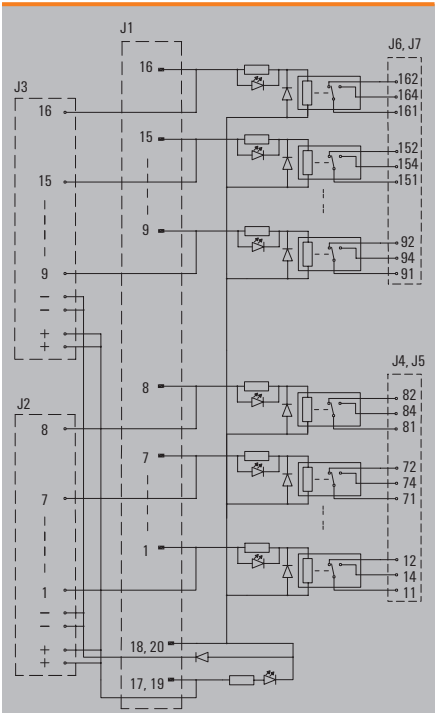


RSM-16 12 V+/24 V+/48 V+ 1CO
RSM-16I 12 V+/24 V+/48 V+ 1CO
RSM-16 24 V+ BASE

Ordering data


12 V DC	Type	Screw (S) 1CO	PUSH IN (Z) 1CO	Screw (S) 2CO	Tension clamp (Z) 2CO
12 V DC positive switching (negative common)	RSM-16 12V+	1448230000	1448250000	1449170000	1449190000
12 V DC negative switching (positive common)	RSM-16 12V-	1448240000	1448270000	1449180000	1449200000
24 V DC					
24 V DC positive switching (negative common)	RSM-16 24V+	1448280000	1448300000	1449210000	1449230000
24 V DC negative switching (positive common)	RSM-16 24V-	1448290000	1448310000	1449220000	1449250000
24 V DC positive switching (negative common) with test button	RSM16I 24V+	1448540000	1448550000	1449380000	1449390000
24 V DC positive switching (negative common) without relays	RSM-16 24V+ BASE	1448480000	1448490000		
24 V AC/DC					
24 V AC/DC	RSM-16 24VAC/DC	1448370000	1448380000	1449310000	1449320000
48 V DC					
48 V DC positive switching (negative common)	RSM-16 48V+	1448320000	1448340000	1449270000	1449290000
48 V DC negative switching (positive common)	RSM-16 48V-	1448330000	1448350000	1449280000	1449300000
115 V AC/DC					
115 VAC/DC	RSM-16 115VAC/DC	1448390000	1448400000	1449330000	1449340000
230 V AC					
230 V AC	RSM-16 230Vac	1448410000	1448420000	1449350000	1449370000

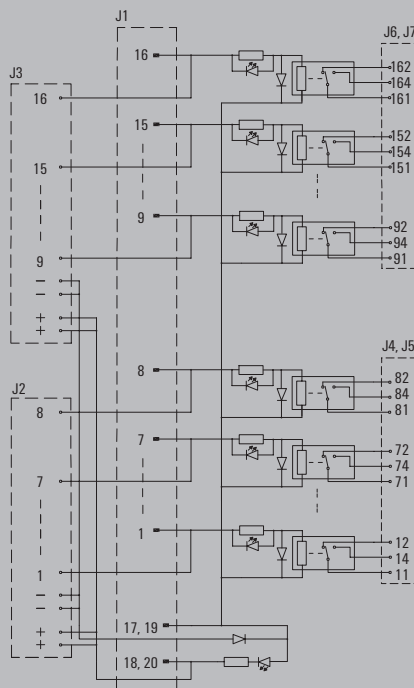

RSM-16 12 V/24 V/48 V 1C0


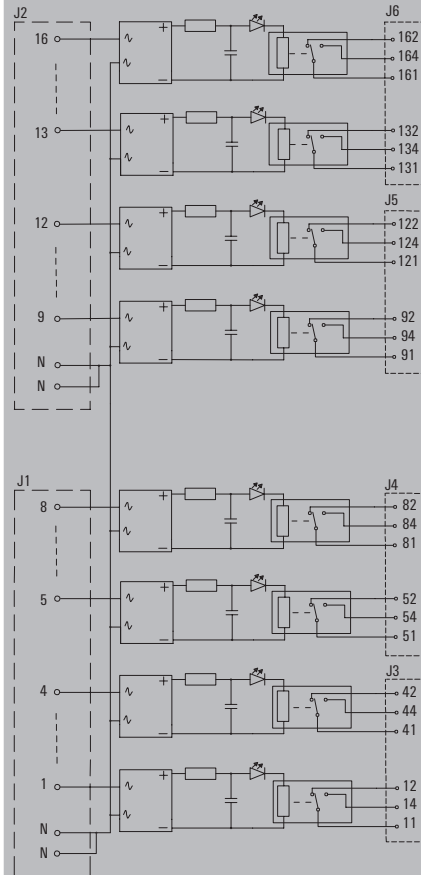


RSM-16 115 V AC/DC 1C0

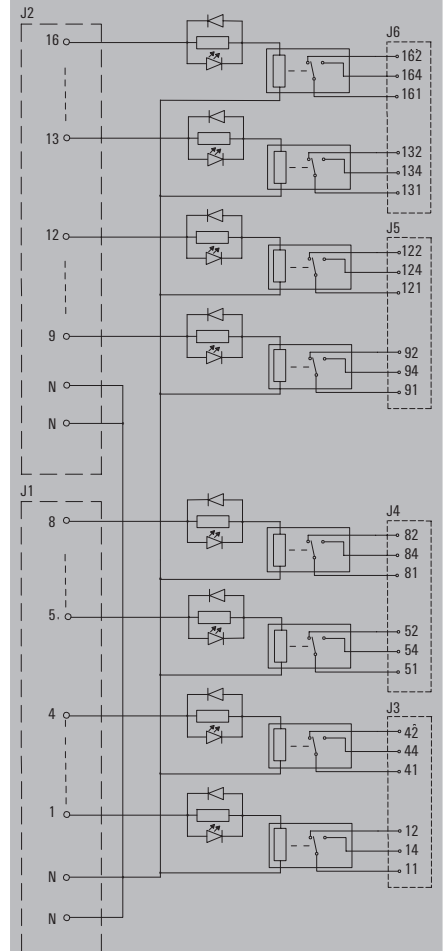

RSM-16 230 V AC 1C0


Note: Contact configuration for 2 changeover versions (2C0)

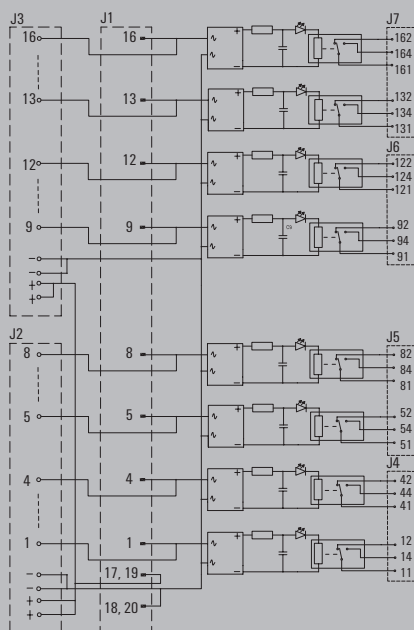

RSM-16 24 V AC/DC 1C0

RSMS 1CO – Relay interface**1 changeover**


- Interface from 8 to 16 electromechanical relays
- 1 changeover
- Positive or negative switching or ac/dc
- Flat-connector available to make easy the connection to PLC'S
- Compatible with solid-state relays
- With optional gold contact relay
- Screw and tension clamp

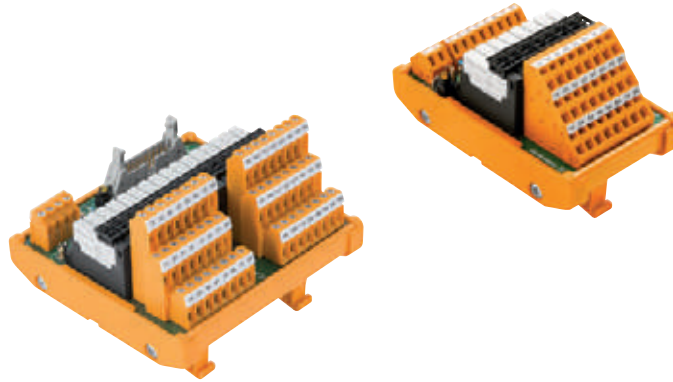**General technical data**

General features	
Relay	RSS relay
LED status display per channel	Green
LED status of the supply voltage	Yellow
Nominal output data	
Contact material	AgNi 90/10 / AgNi 5µAu
Operative voltage	250 V AC
Max. AC continuous current	4.5 A
Minimum contact current standard / Gold	100 mA / 1 mA
Minimum contact voltage standard / Gold	5 V / 1 V
Mechanical service life (dc coil)	5 x 10 ⁶ Switching cycles
Operating temperature	-25...+50 °C
Storage temperature	-40...+60 °C
Insulation coordination (EN 50178)	
Rated input insulation voltage	< 50 V AC
Rated output insulation voltage	250 V AC
Overvoltage category input/output	III
Overvoltage category output/input	II
Pollution severity level	2
Impulse voltage test (1.2/50µs)	6 kV
Insulation test voltage	1.2 kV AC
Clearance input/output	≥ 5.5 mm
Dimensions	
Clamping range, min. [Field]/ Clamping range, max. [Field]	
Clamping range, min. [supply]/Clamping range, max. [supply]	
Mounting rail	
Width / height	mm
Note	
Electromechanical relays: 5 V DC: Spare Relay RSS113005 4061580000; 12 V DC: Spare relay RSS113012 4061610000; 24 V DC: Spare relay RSS113024 4060120000; 24 V AC/DC: Spare relay RSS113024 4060120000; 48 V DC: Spare relay RSS113048 4061620000; 24 V DC Gold contact: Spare relay RSS112024 4061590000 Solid-state relays: SSR 24 V DC/24 V DC 0.1 A 4061180000; SSR 24 V DC/24 V DC 2 A 4061190000; SSR 24 V DC/230 V AC 1 A 4061210000.	

Screw connection		Tension clamp	
0.13 mm ² / 6 mm ²		0.13 mm ² / 2.5 mm ²	
0.13 mm ² / 6 mm ²		0.2 mm ² / 2.5 mm ²	
TS 32 / TS 35		TS 32 / TS 35	
109 x 85		109 x 76	

8-16 Relays – Screw/Tension clamp connection

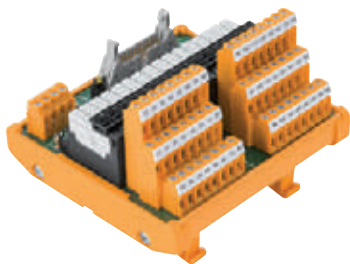


Technical data


Connection control side	Flat connector 20 poles
Connection field side	LP3R 5.08 / LM3RZF 5.08
Length (RSM-8 / RSM-16)	61 / 112 mm
24 V DC	
Operating voltage	24 V DC $\pm 10\%$
Rated current (dc)	7.1 mA
Free wheel diode	Yes
Note	

Ordering data

24 V DC	Type	Screw (S)	Tension clamp (Z)
8 Relays	24 V DC positive switching (negative common) with flat connector	RSMS-8H 24V+ 1C0	1456540000
	24 V DC negative switching (positive common) with flat connector	RSMS-8H 24V- 1C0	1456550000
16 Relays	24 V DC positive switching (negative common) with flat connector	RSMS-16H 24V+ 1C0	1457300000
	24 V DC negative switching (positive common) with flat connector	RSMS-16H 24V- 1C0	1457330000
Note			

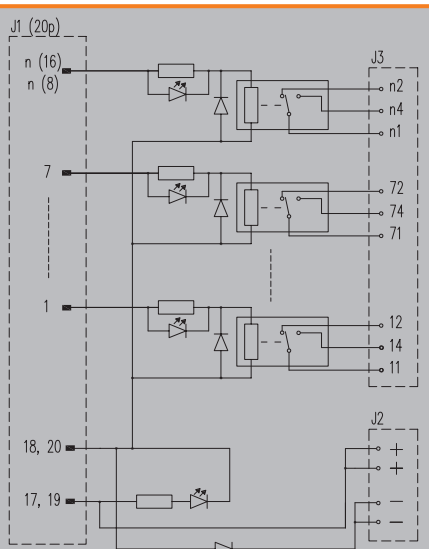


RSMS-8H 24 V+ 1C0
RSMS-16H 24 V+ 1C0

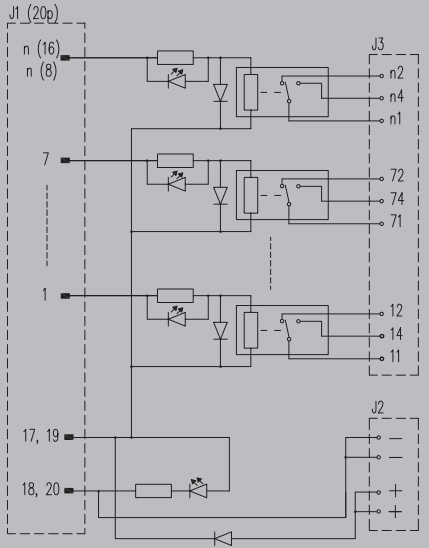

RSMS-8H 24 V- 1C0
RSMS-16H 24 V- 1C0

8-16 Relays – Screw/Tension clamp connection




Technical data


Connection control side	LP 5.08 / LMZF 5.08
Connection field side	LP3R 5.08 / LM3RZF 5.08
Length (8 relays) / Length (16 relays)	61 / 112 mm
12 V DC	
Operating voltage	12 V DC $\pm 10\%$
Rated current (dc)	14.2 mA
Free wheel diode	Yes
24 V DC	
Operating voltage	24 V DC $\pm 10\%$
Rated current (dc)	7.1 mA
Free wheel diode	Yes
24 V AC/DC	
Operating voltage	24 V AC/DC $\pm 10\%$
Rated current (dc)	6 mA
Rated current (ac)	15.6 mA
Free wheel diode	No
48 V DC	
Operating voltage	48 V DC $\pm 10\%$
Rated current (dc)	4.5 mA
Free wheel diode	Yes
Note	

Ordering data


		Type	Screw (S)	Tension clamp (Z)
8 Relays	12 V DC positive switching (negative common)	RSMS-8 12V+ 1CO	1456590000	1456690000
	12 V DC negative switching (positive common)	RSMS-8 12V- 1CO	1456640000	1456730000
	12 V DC positive switching (negative common)	RSMS-16 12V+ 1CO		1457040000
	12 V DC negative switching (positive common)	RSMS-16 12V- 1CO	1457000000	1457090000
8 Relays	24 V DC positive switching (negative common)	RSMS-8 24V+ 1CO	1456610000	1456700000
	24 V DC negative switching (positive common)	RSMS-8 24V- 1CO	1456650000	1456740000
	24 V DC positive switching (negative common) without relays	RSMS-8 24V+ BASE	1456810000	
	24 V DC positive switching (negative common)	RSMS-16 24V+ 1CO	1456970000	1457050000
	24 V DC negative switching (positive common)	RSMS-16 24V- 1CO	1457010000	1457100000
	24 V DC positive switching (negative common) without relays	RSMS-16 24V+ BASE	1457170000	1457180000
8 Relays	24 V AC/DC	RSMS-8 24VAC/DC 1CO	1456830000	
	24 V AC/DC with Gold contact	RSMS-8 24VUC AU 1CO	1456840000	
	24 V AC/DC	RSMS-16 24VAC/DC 1CO	1457190000	1457210000
	24 V AC/DC with Gold contact	RSMS-16 24VUC AU 1CO	1457200000	1457220000
8 Relays	48 V DC positive switching (negative common)	RSMS-8 48V+ 1CO	1456620000	1456710000
	48 V DC negative switching (positive common)	RSMS-8 48V- 1CO	1456670000	1456750000
	48 V DC positive switching (negative common)	RSMS-16 48V+ 1CO	1456980000	1457070000
	48 V DC negative switching (positive common)	RSMS-16 48V- 1CO	1457020000	1457110000
Note				

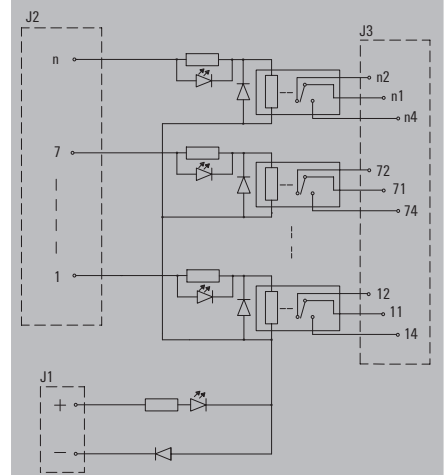

RSMS-8 12 V+/24 V+/48 V+ 1CO
RSMS-16 12 V+/24 V+/48 V+ 1CO
RSMS-8 24 V+ BASE
RSMS-16 24 V+ BASE

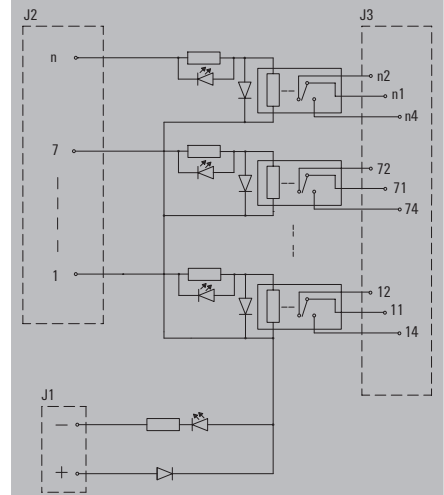

RSMS-8 12 V-/24 V-/48 V- 1CO
RSMS-16 12 V-/24 V-/48 V- 1CO

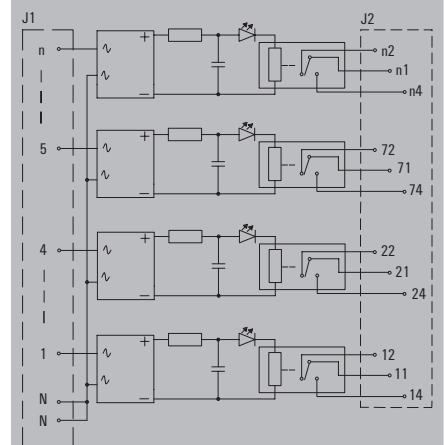

RSMS-8 24 V AC/DC 1CO
RSMS-16 24 V AC/DC 1CO

Faster signal wiring taking up less space

Our interface adapters for TERMSERIES relays reduce wiring times thanks to plug-and-play


Extensive wiring complexity leads to high throughput times in electrical cabinets. Thanks to our TERMSERIES interface adapter, you benefit from the speed of our plug-and-play solution. Let's connect.

To reduce wiring times, pre-assembled lines are used between the controller and interface level and are simply connected to the TERMSERIES adapter. This enables electrical cabinet throughput times to be significantly reduced.

E

Our pre-assembled plug-and-play solution with TERMSERIES interface adapter minimises wiring complexity. The adapter has a universal fit and offers a genuine space advantage in conjunction with TERMSERIES products with identical contours.

Thanks to its symmetrical structure, the adapter can be connected to both TERMSERIES coil and contact connections. The use of positive and negative switching logic is also possible for the lower level with the aid of the potential changeover switch.

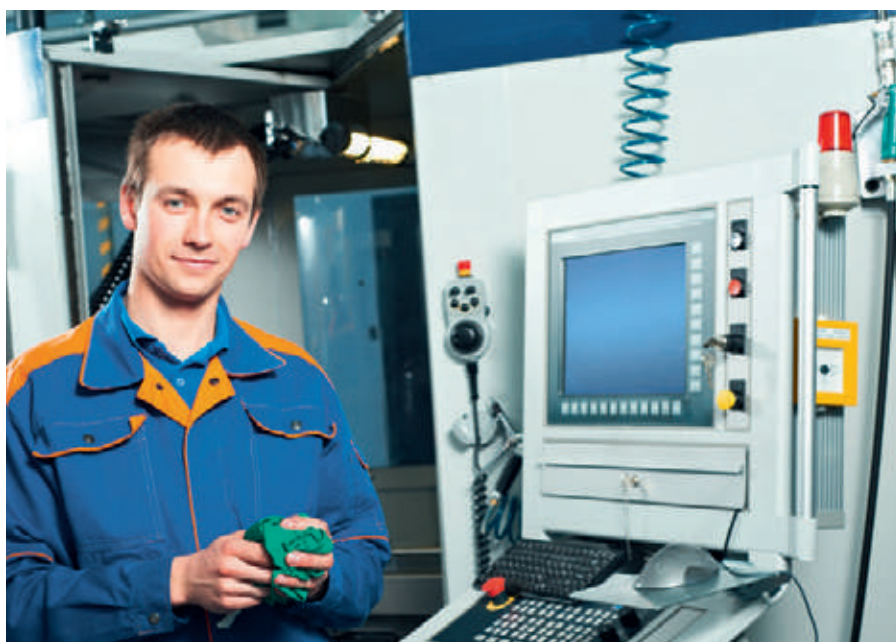

Configure wiring-intensive cabinets faster

Wiring complexity is especially high for electrical cabinets builders of standardised series cabinets in the field of machine construction and plant manufacture, process control technology and in shipbuilding. The wiring and throughput times of your machines can be reduced with the use of TERMSERIES interface adapters.

Connection to a variety of controllers

The standardised ribbon cable plug-in connections enable connection of all the interface system's pre-assembled cable types.

Fast supply and bridging of the auxiliary voltage

Quick and safe supply of the auxiliary voltage as a result of the TOP connection with "PUSH IN" technology. Simple bridging is also possible thanks to duplication of the connections.

Reliable and unambiguous wiring

Installation is unambiguous and safe thanks to practical marking of the connections, assignment of the contacts and the option of individual marking using MultiCard.



Both types of logic with one device

The potential switch for the lower level allows the adapter for plus and minus switching logic to be used.



Connection with our remote I/O system u-remote

Use our perfectly matched cable harness for connecting our u-remote DI/DO sub assemblies and TERMSERIES relays.



PLC interface selection tables

The following Selection guides enable you to quickly and easily choose the correct products according to your application needs

Choose the PLC Card:

In the same row you can find the number of cable required, the TERMSERIES adapter and the TERMSERIES relays to make the connection with the selected PLC Card.

3 options are possible:

- 8 channels with TERMSERIES 6.4 mm
- 8 channels with TERMSERIES 12.8 mm
- 16 channels with TERMSERIES 6.4 mm

Note: Technical information about TERMSERIES Adapter and relays can be found in Weimüller Catalogue 4.2 Relays and solid-state relays

PLC ABB S800

8-channel solution

	PLC		Cables		Connection		TERMSERIES adapter				TERMSERIES adapter			
	Input/Output cards		Standard				TERMSERIES adapter (Relay 6.4 mm)				TERMSERIES adapter (Relay 12.8 mm)			
							TERMSERIES adapter		Inputs or outputs with relays		TERMSERIES adapter		Inputs or outputs with relays	
	Manufacturer code	Number/ Type of channels	Order No.	Qty.			Screw connection	Tension-clamp connection	Order No.	Qty.	Order No.	Qty.	Order No.	Qty.
DI	DI810	16 DI ^{B)}	1512410xxx	1			1463520000	2	1123000000	16	1463540000	2	1123730000	16
									1123120000				1123850000	
	DI814	16 DI ^{A)}	1512410xxx	1			1463520000	2	1123000000	16	1463540000	2	1123730000	16
									1123120000				1123850000	
	DI830	16 DI ^{B)}	1512410xxx	1			1463520000	2	1123000000	16	1463540000	2	1123730000	16
									1123120000				1123850000	
	DI840	16 DI ^{B)}	1512410xxx	1			1463520000	2	1123000000	16	1463540000	2	1123730000	16
									1123120000				1123850000	
	DI880	16 DI ^{B)}	1512410xxx	1			1463520000	2	1123000000	16	1463540000	2	1123730000	16
									1123120000				1123850000	
DO	DO810	16 DO ^{A)}	1512410xxx	1			1463520000	2	1122770000	16	1463540000	2	1123490000	16
									1122880000				1123610000	
	DO814	16 DO ^{B)}	1512410xxx	1			1463520000	2	1122780000	16	1463540000	2	1123500000	16
									1122890000				1123620000	
	DO815	8 DO ^{A)}	1512390xxx	1			1463520000	1	1122770000	8	1463540000	1	1123490000	8
									1122880000				1123610000	
	DO840	16 DO ^{A)}	1512410xxx	1			1463520000	2	1122770000	16	1463540000	2	1123490000	16
									1122880000				1123610000	
	DO880	16 DO ^{A)}	1512410xxx	1			1463520000	2	1122770000	16	1463540000	2	1123490000	16
									1122880000				1123610000	
Note	A) The TERMSERIES adapter switch, should be positioned on the "-" side. B) The TERMSERIES adapter switch, should be positioned on the "+" side.													

Note

A) The TERMSERIES adapter switch, should be positioned on the "+" side.
B) The TERMSERIES adapter switch, should be positioned on the "+" side.

- The adapters should receive power from an external supply.
- The last 3 digits of the cable code indicates its length in decimeters. For example, if the code ends in 100, the cable would be 10 m long.
- The relays indicated in the table are chosen for 24 V DC control voltage. For digital input cards these can be replaced by TERMSERIES relays with control voltages from 5 V DC to 230 V AC.

PLC ABB S800

16-channel solution

	PLC		Cables		Connection		TERMSERIES adapter			
	Input/Output cards		Standard				TERMSERIES adapter (Relay 6.4 mm)			
							TERMSERIES adapter		Inputs or outputs with relays	
Manufacturer code	Number/ Type of channels	Order No.	Qty.	Screw connection	Tension-clamp connection	Order No.	Qty.	Order No.	Qty.	
DI	DI810	16 DI ^{B)}	7789641xxx	1			1463550000	1	1123000000	16
	DI814	16 DI ^{A)}	7789641xxx	1			1463550000	1	1123000000	16
	DI830	16 DI ^{B)}	7789641xxx	1			1463550000	1	1123000000	16
	DI840	16 DI ^{B)}	7789641xxx	1			1463550000	1	1123000000	16
	DI880	16 DI ^{B)}	7789641xxx	1			1463550000	1	1123000000	16
	DO	DO810	16 DO ^{A)}	7789641xxx	1			1463550000	1	1122770000
DO814		16 DO ^{B)}	7789641xxx	1			1463550000	1	1122780000	16
DO840		16 DO ^{A)}	7789641xxx	1			1463550000	1	1122770000	16
DO880		16 DO ^{A)}	7789641xxx	1			1463550000	1	1122770000	16
									1122880000	16
Note	A) The TERMSERIES adapter switch, should be positioned on the "−" side. B) The TERMSERIES adapter switch, should be positioned on the "+" side.									

Note

A) The TERMSERIES adapter switch, should be positioned on the "+" side.
B) The TERMSERIES adapter switch, should be positioned on the "+" side.

- The adapters should receive power from an external supply.
- The last 3 digits of the cable code indicates its length in decimeters. For example, if the code ends in 100, the cable would be 10 m long.
- The relays indicated in the table are chosen for 24 V DC control voltage. For digital input cards these can be replaced by TERMSERIES relays with control voltages from 5 V DC to 230 V AC.

PLC EMERSON DELTA V

8-channel solution

	PLC		Cables		Connection		TERMSERIES adapter				TERMSERIES adapter			
	Input/Output cards		Standard				TERMSERIES adapter (Relay 6.4 mm)				TERMSERIES adapter (Relay 12.8 mm)			
							TERMSERIES adapter		Inputs or outputs with relays		TERMSERIES adapter		Inputs or outputs with relays	
	Manufacturer code	Number/ Type of channels	Order No.	Qty.	Screw connection	Tension-clamp connection	Order No.	Qty.	Order No.	Qty.	Order No.	Qty.	Order No.	Qty.
DI	VE4001S2T2B4	32 DI A)	1349730xxx	4			1463520000	4	1123000000	32	1463540000	4	1123730000	32
					1123120000	1123850000								
	VE4001S2T2B5	32 DI A)	1512370xxx	2			1463520000	4	1123000000	32	1463540000	4	1123730000	32
					1123120000	1123850000								
DO	VE4002S1T2B5	32 DO A)	134973xxx	4			1463520000	4	1122770000	32	1463540000	4	1123490000	32
					1122880000	1123610000								
	VE4002S1T2B6	32 DO A)	1512370xxx	2			1463520000	4	1122770000	32	1463540000	4	1123490000	32
					1122880000	1123610000								
Note	A) The TERMSERIES adapter switch, should be positioned on the "+" side. B) The TERMSERIES adapter switch, should be positioned on the "+" side.													

- The adapters should receive power from an external supply
- The last 3 digits of the cable code indicates its length in decimeters. For example, if the code ends in 100, the cable would be 10 m long
- The relays indicated in the table are chosen for 24 V DC control voltage. For digital input cards these can be replaced by TERMSERIES relays with control voltages from 5 V DC to 230 V AC.

PLC EMERSON DELTA V

16-channel solution

	PLC		Cables		Connection		TERMSERIES adapter			
	Input/Output cards		Standard				TERMSERIES adapter (Relay 6.4 mm)			
							TERMSERIES adapter		Inputs or outputs with relays	
	Manufacturer code	Number/ Type of channels	Order No.	Qty.	Screw connection	Tension-clamp connection	Order No.	Qty.	Order No.	Qty.
DI	VE4001S2T2B4	32 DI ^{A)}	7789100xxx	2			1463550000	2	1123000000	32
					1123120000					
	VE4001S2T2B5	32 DI ^{A)}	7789301xxx	2			1463550000	2	1123000000	32
					1123120000					
DO	VE4002S1T2B5	32 DO ^{A)}	7789100xxx	2			1463550000	2	1122770000	32
					1122880000					
	VE4002S1T2B6	32 DO ^{A)}	7789301xxx	2			1463550000	2	1122770000	32
					1122880000					
Note	A) The TERMSERIES adapter switch, should be positioned on the "+" side. B) The TERMSERIES adapter switch, should be positioned on the "+" side.									

- The adapters should receive power from an external supply
- The last 3 digits of the cable code indicates its length in decimeters. For example, if the code ends in 100, the cable would be 10 m long
- The relays indicated in the table are chosen for 24 V DC control voltage. For digital input cards these can be replaced by TERMSERIES relays with control voltages from 5 V DC to 230 V AC.

PLC GEFANUC 90-30

8-channel solution

	PLC		Cables		Connection		TERMSERIES adapter				TERMSERIES adapter				
	Input/Output cards		Standard				TERMSERIES adapter (Relay 6.4 mm)				TERMSERIES adapter (Relay 12.8 mm)				
							TERMSERIES adapter		Inputs or outputs with relays		TERMSERIES adapter		Inputs or outputs with relays		
	Manufacturer code	Number/ Type of channels	Order No.	Qty.	Screw connection	Tension-clamp connection	Order No.	Qty.	Order No.	Qty.	Order No.	Qty.	Order No.	Qty.	
DI	IC693MDL241	16 DI, DC positive logic ^{B)}	1511520xxx	1			1463520000	2	1123000000	16	1463540000	2	1123730000	16	
		16 DI, DC negative logic ^{A)}	1511530xxx	1			1463520000	2	1123000000	16	1463540000	2	1123730000	16	
	IC693MDL634	8 DI, positive logic ^{B)}	1511630xxx	1			1463520000	1	1123000000	8	1463540000	1	1123730000	8	
		8 DI, negative logic ^{A)}	1511640xxx	1			1463520000	1	1123000000	8	1463540000	1	1123730000	8	
	IC693MDL645	16 DI, positive logic ^{B)}	1511520xxx	1			1463520000	2	1123000000	16	1463540000	2	1123730000	16	
		16 DI, negative logic ^{A)}	1511530xxx	1			1463520000	2	1123000000	16	1463540000	2	1123730000	16	
	IC693MDL646	16 DI, positive logic ^{B)}	1511520xxx	1			1463520000	2	1123000000	16	1463540000	2	1123730000	16	
		16 DI, negative logic ^{A)}	1511530xxx	1			1463520000	2	1123000000	16	1463540000	2	1123730000	16	
	IC693MDL655	32 DI, positive logic ^{B)}	1511540xxx	2			1463520000	4	1123000000	32	1463540000	4	1123730000	32	
		32 DI, negative logic ^{A)}	1511570xxx	2			1463520000	4	1123000000	32	1463540000	4	1123730000	32	
	DO	IC693MDL730	8 DO, 24 V DC ^{A)}	1511690xxx	1			1463520000	1	1122770000	8	1463540000	1	1123490000	8
		IC693MDL731	8 DO, 24 V DC ^{B)}	1511690xxx	1			1463520000	1	1122780000	8	1463540000	1	1123500000	8
IC693MDL732		8 DO, 24 V DC ^{A)}	1511670xxx	1			1463520000	1	1122770000	8	1463540000	1	1123490000	8	
IC693MDL733		8 DO, 24 V DC ^{B)}	1511670xxx	1			1463520000	1	1122780000	8	1463540000	1	1123500000	8	
IC693MDL740		16 DO, 24 V DC ^{A)}	1511590xxx	1			1463520000	2	1122770000	16	1463540000	2	1123490000	16	
IC693MDL741		16 DO, 24 V DC ^{B)}	1511590xxx	1			1463520000	2	1122780000	16	1463540000	2	1123500000	16	
IC693MDL742		16 DO, 24 V DC ^{A)}	1511590xxx	1			1463520000	2	1122770000	16	1463540000	2	1123490000	16	
IC693MDL752		32 DO, 24 V DC ^{B)}	1511620xxx	1			1463520000	4	1122780000	32	1463540000	4	1123500000	32	
IC693MDL753		32 DO, 24 V DC ^{A)}	1511620xxx	1			1463520000	4	1122770000	32	1463540000	4	1123490000	32	
Note A) The TERMSERIES adapter switch, should be positioned on the "A" side. B) The TERMSERIES adapter switch, should be positioned on the "B" side.															

- The adapters should receive power from an external supply.
- The last 3 digits of the cable code indicates its length in decimeters. For example, if the code ends in 100, the cable would be 10 m long.
- The relays indicated in the table are chosen for 24 V DC control voltage. For digital input cards these can be replaced by TERMSERIES relays with control voltages from 5 V DC to 230 V AC.

PLC GEFANUC 90-30

16-channel solution

	PLC		Cables		Connection		TERMSERIES adapter				
	Input/Output cards		Standard				TERMSERIES adapter (Relay 6.4 mm)				
							TERMSERIES adapter		Inputs or outputs with relays		
	Manufacturer code	Number/ Type of channels	Order No.	Qty.	Screw connection	Tension-clamp connection	Order No.	Qty.	Order No.	Qty.	
DI	IC693MDL241	16 DI, DC positive logic ^{B)}	7789067xxx	1			1463550000	1	1123000000	16	
		16 DI, DC negative logic ^{A)}	1511710xxx	1			1463550000	1	1123000000	16	
	IC693MDL645	16 DI, positive logic ^{B)}	7789067xxx	1			1463550000	1	1123000000	16	
		16 DI, negative logic ^{A)}	1511710xxx	1			1463550000	1	1123000000	16	
	IC693MDL646	16 DI, positive logic ^{B)}	7789067xxx	1			1463550000	1	1123000000	16	
		16 DI, negative logic ^{A)}	1511710xxx	1			1463550000	1	1123000000	16	
	IC693MDL655	32 DI, positive logic ^{B)}	7789066xxx	2			1463550000	2	1123000000	32	
		32 DI, negative logic ^{A)}	1511720xxx	2			1463550000	2	1123000000	32	
	DO	IC693MDL740	16 DO, 24 V DC ^{A)}	7789068xxx	1			1463550000	1	1122770000	16
			16 DO, 24 V DC ^{B)}	7789068xxx	1			1463550000	1	1122880000	16
		IC693MDL742	16 DO, 24 V DC ^{A)}	7789068xxx	1			1463550000	1	1122770000	16
			32 DO, 24 V DC ^{B)}	7789066xxx	2			1463550000	2	1122880000	32
IC693MDL752		32 DO, 24 V DC ^{B)}	7789066xxx	2			1463550000	2	1122880000	32	
		32 DO, 24 V DC ^{A)}	7789066xxx	2			1463550000	2	1122770000	32	
Note A) The TERMSERIES adapter switch, should be positioned on the "L" side. B) The TERMSERIES adapter switch, should be positioned on the "N" side.											

- The adapters should receive power from an external supply.
- The last 3 digits of the cable code indicates its length in decimeters. For example, if the code ends in 100, the cable would be 10 m long.
- The relays indicated in the table are chosen for 24 V DC control voltage. For digital input cards these can be replaced by TERMSERIES relays with control voltages from 5 V DC to 230 V AC.

PLC GEFANUC RX3I

8-channel solution

	PLC		Cables		Connection		TERMSERIES adapter				TERMSERIES adapter				
	Input/Output cards		Standard				TERMSERIES adapter (Relay 6.4 mm)				TERMSERIES adapter (Relay 12.8 mm)				
							TERMSERIES adapter		Inputs or outputs with relays		TERMSERIES adapter		Inputs or outputs with relays		
	Manufacturer code	Number/ Type of channels	Order No.	Qty.	Screw connection	Tension-clamp connection	Order No.	Qty.	Order No.	Qty.	Order No.	Qty.	Order No.	Qty.	
DI	IC694MDL241	16 DI, DC positive logic ^{B)}	1511520xxx	1			1463520000	2	1123000000	16	1463540000	2	1123730000	16	
		16 DI, DC negative logic ^{A)}	1511530xxx	1			1463520000	2	1123000000	16	1463540000	2	1123730000	16	
	IC694MDL634	8 DI, positive logic ^{B)}	1511630xxx	1			1463520000	1	1123000000	8	1463540000	1	1123730000	8	
		8 DI, negative logic ^{A)}	1511640xxx	1			1463520000	1	1123000000	8	1463540000	1	1123730000	8	
	IC694MDL645	16 DI, positive logic ^{B)}	1511520xxx	1			1463520000	2	1123000000	16	1463540000	2	1123730000	16	
		16 DI, negative logic ^{A)}	1511530xxx	1			1463520000	2	1123000000	16	1463540000	2	1123730000	16	
	IC694MDL646	16 DI, positive logic ^{B)}	1511520xxx	1			1463520000	2	1123000000	16	1463540000	2	1123730000	16	
		16 DI, negative logic ^{A)}	1511530xxx	1			1463520000	2	1123000000	16	1463540000	2	1123730000	16	
	IC694MDL655	32 DI, positive logic ^{B)}	1511540xxx	2			1463520000	4	1123000000	32	1463540000	4	1123730000	32	
		32 DI, negative logic ^{A)}	1511570xxx	2			1463520000	4	1123000000	32	1463540000	4	1123730000	32	
	IC694MDL660	32 DI, positive logic ^{B)}	1511840xxx	1			1463520000	4	1123000000	32	1463540000	4	1123730000	32	
		32 DI, negative logic ^{A)}	1511840xxx	1			1463520000	4	1123000000	32	1463540000	4	1123730000	32	
	DO	IC694MDL732	8 DO, 24 V DC ^{A)}	1511670xxx	1			1463520000	1	1122770000	8	1463540000	1	1123490000	8
		IC694MDL740	16 DO, 24 V DC ^{A)}	1511590xxx	1			1463520000	2	1122770000	16	1463540000	2	1123490000	16
			16 DO, 24 V DC ^{B)}	1511590xxx	1			1463520000	2	1122780000	16	1463540000	2	1123500000	16
		IC694MDL742	16 DO, 24 V DC ^{A)}	1511590xxx	1			1463520000	2	1122770000	16	1463540000	2	1123490000	16
16 DO, 24 V DC ^{B)}			1511620xxx	2			1463520000	4	1122780000	32	1463540000	4	1123500000	32	
IC694MDL752		32 DO, 24 V DC ^{A)}	1511620xxx	2			1463520000	4	1122770000	32	1463540000	4	1123490000	32	
		32 DO, 24 V DC ^{B)}	1511620xxx	2			1463520000	4	1122780000	32	1463540000	4	1123500000	32	
IC694MDL754		32 DO, 24 V DC ^{A)}	1512670xxx	1			1463520000	4	1122770000	32	1463540000	4	1123490000	32	
Note	A) The TERMSERIES adapter switch, should be positioned on the "H" side. B) The TERMSERIES adapter switch, should be positioned on the "+V" side.														

Note

A) The TERMSERIES adapter switch, should be positioned on the "+" side.
B) The TERMSERIES adapter switch, should be positioned on the "-" side.

- The adapters should receive power from an external supply.
- The last 3 digits of the cable code indicates its length in decimeters. For example, if the code ends in 100, the cable would be 10 m long.
- The relays indicated in the table are chosen for 24 V DC control voltage. For digital input cards these can be replaced by TERMSERIES relays with control voltages from 5 V DC to 230 V AC.

PLC GEFANUC RX3I

16-channel solution

	PLC		Cables		Connection		TERMSERIES adapter				
	Input/Output cards		Standard				TERMSERIES adapter (Relay 6.4 mm)				
							TERMSERIES adapter		Inputs or outputs with relays		
	Manufacturer code	Number/ Type of channels	Order No.	Qty.	Screw connection	Tension-clamp connection	Order No.	Qty.	Order No.	Qty.	
DI	IC694MDL241	16 DI, DC positive logic ^{B)}	7789067xxx	1			1463550000	1	1123000000	16	
		16 DI, DC negative logic ^{A)}	1511710xxx	1			1463550000	1	1123000000	16	
	IC694MDL645	16 DI, positive logic ^{B)}	7789067xxx	1			1463550000	1	1123000000	16	
		16 DI, negative logic ^{A)}	1511710xxx	1			1463550000	1	1123000000	16	
	IC694MDL646	16 DI, positive logic ^{B)}	7789067xxx	1			1463550000	1	1123000000	16	
		16 DI, negative logic ^{A)}	1511710xxx	1			1463550000	1	1123000000	16	
	IC694MDL655	32 DI, positive logic ^{B)}	7789066xxx	2			1463550000	2	1123000000	32	
		32 DI, negative logic ^{A)}	1511710xxx	2			1463550000	2	1123000000	32	
	IC694MDL660	32 DI, positive logic ^{B)}	7789619xxx	1			1463520000	2	1123000000	32	
	DO	IC694MDL740	16 DO, 24 V DC ^{A)}	7789068xxx	1			1463550000	1	1122770000	16
		IC694MDL741	16 DO, 24 V DC ^{B)}	7789068xxx	1			1463550000	1	1122780000	16
		IC694MDL742	16 DO, 24 V DC ^{A)}	7789068xxx	1			1463550000	1	1122770000	16
IC694MDL752		32 DO, 24 V DC ^{B)}	7789066xxx	1			1463550000	2	1122780000	32	
IC694MDL753		32 DO, 24 V DC ^{A)}	7789066xxx	1			1463550000	2	1122770000	32	
IC694MDL754		32 DO, 24 V DC ^{A)}	7789618xxx	1			1463550000	2	1122770000	32	
Note											
A) The TERMSERIES adapter switch, should be positioned on the "L" side. B) The TERMSERIES adapter switch, should be positioned on the "N" side.											

- The adapters should receive power from an external supply.
- The last 3 digits of the cable code indicates its length in decimeters. For example, if the code ends in 100, the cable would be 10 m long.
- The relays indicated in the table are chosen for 24 V DC control voltage. For digital input cards these can be replaced by TERMSERIES relays with control voltages from 5 V DC to 230 V AC.

PLC HONEYWELL C200

8-channel solution

	PLC		Cables		Connection		TERMSERIES adapter				TERMSERIES adapter			
	Input/Output cards		Standard				TERMSERIES adapter (Relay 6.4 mm)				TERMSERIES adapter (Relay 12.8 mm)			
							TERMSERIES adapter		Inputs or outputs with relays		TERMSERIES adapter		Inputs or outputs with relays	
	Manufacturer code	Number/ Type of channels	Order No.	Qty.			Screw connection	Tension-clamp connection	Order No.	Qty.	Order No.	Qty.	Order No.	Qty.
DI	TC-IDX161/ TK-IDX161	16 DI ^{B)}	1511990xxx	1			1463520000	2	1123000000	16	1463540000	2	1123730000	16
									1123120000				1123850000	
	TC-IDJ161/ TK-IDJ161	16 DI ^{B)}	1511990xxx	1			1463520000	2	1123000000	16	1463540000	2	1123730000	16
									1123120000				1123850000	
	TC-IDD321/ TK-IDD321	32 DI ^{B)}	1512010xxx	1			1463520000	4	1123000000	32	1463540000	4	1123730000	32
									1123120000				1123850000	
DO	TC-ODX161/ TK-ODX161	16 DO ^{A)}	1512030xxx	1			1463520000	2	1122770000	16	1463540000	2	1123490000	16
									1122880000				1123610000	
	TC-ODJ161/ TK-ODJ161	16 DO ^{A)}	1512070xxx	1			1463520000	2	1122770000	16	1463540000	2	1123490000	16
									1122880000				1123610000	
	TC-ODD321/ TK-ODD321	32 DO ^{A)}	1512020xxx	1			1463520000	4	1122770000	32	1463540000	4	1123490000	32
									1122880000				1123610000	
Note	A) The TERMSERIES adapter switch, should be positioned on the "+" side. B) The TERMSERIES adapter switch, should be positioned on the "+" side.													

- The adapters should receive power from an external supply
- The last 3 digits of the cable code indicates its length in decimeters. For example, if the code ends in 100, the cable would be 10 m long
- The relays indicated in the table are chosen for 24 V DC control voltage. For digital input cards these can be replaced by TERMSERIES relays with control voltages from 5 V DC to 230 V AC.

PLC HONEYWELL C200

16-channel solution

	PLC		Cables		Connection		TERMSERIES adapter			
	Input/Output cards		Standard				TERMSERIES adapter (Relay 6.4 mm)			
							TERMSERIES adapter		Inputs or outputs with relays	
Manufacturer code	Number/ Type of channels	Order No.	Qty.	Screw connection	Tension-clamp connection	Order No.	Qty.	Order No.	Qty.	
DI	TC-IDX161/ TK-IDX161	16 DI ^{B)}	7789049xxx	1			1463550000	1	1123000000	16
								1123120000		
	TC-IDJ161/ TK-IDJ161	16 DI ^{B)}	7789049xxx	1			1463550000	1	1123000000	16
								1123120000		
	TC-IDD321/ TK-IDD321	32 DI ^{B)}	7789041xxx	1			1463550000	2	1123000000	32
								1123120000		
DO	TC-ODX161/ TK-ODX161	16 DO ^{A)}	7789040xxx	1			1463550000	1	1122770000	16
								1122880000		
	TC-ODJ161/ TK-ODJ161	16 DO ^{A)}	7789059xxx	1			1463550000	1	1122770000	16
								1122880000		
	TC-ODD321/ TK-ODD321	32 DO ^{A)}	7789042xxx	1			1463550000	2	1122770000	32
								1122880000		
Note	A) The TERMSERIES adapter switch, should be positioned on the "+" side. B) The TERMSERIES adapter switch, should be positioned on the "+" side.									

- The adapters should receive power from an external supply
- The last 3 digits of the cable code indicates its length in decimeters. For example, if the code ends in 100, the cable would be 10 m long
- The relays indicated in the table are chosen for 24 V DC control voltage. For digital input cards these can be replaced by TERMSERIES relays with control voltages from 5 V DC to 230 V AC.

PLC HONEYWELL C300

8-channel solution

	PLC		Cables		Connection		TERMSERIES adapter				TERMSERIES adapter			
	Input/Output cards		Standard				TERMSERIES adapter (Relay 6.4 mm)				TERMSERIES adapter (Relay 12.8 mm)			
							TERMSERIES adapter		Inputs or outputs with relays		TERMSERIES adapter		Inputs or outputs with relays	
	Manufacturer code	Number/ Type of channels	Order No.	Qty.	Screw connection	Tension-clamp connection	Order No.	Qty.	Order No.	Qty.	Order No.	Qty.	Order No.	Qty.
DI	CC-TDIL01	32 DI, 24 Vdc ^{B)}	2065090xxx	2			1463520000	4	1123000000	32	1463540000	4	1123730000	32
					1123120000	1123850000								
	CC-TDIL11	32 DI, 24 Vdc ^{B)}	2065090xxx	2			1463520000	4	1123000000	32	1463540000	4	1123730000	32
					1123120000	1123850000								
DO	CC-TDOB01	32 DO, 24 Vdc ^{A)}	2065080xxx	2			1463520000	4	1122770000	32	1463540000	4	1123490000	32
					1122880000	1123610000								
	CC-TDOB11	32 DO, 24 Vdc ^{A)}	2065080xxx	2			1463520000	4	1122780000	32	1463540000	4	1123490000	32
					1122890000	1123610000								
Note	A) The TERMSERIES adapter switch, should be positioned on the "+" side. B) The TERMSERIES adapter switch, should be positioned on the "+" side.													

- The adapters should receive power from an external supply.
- The last 3 digits of the cable code indicates its length in decimeters. For example, if the code ends in 100, the cable would be 10 m long.
- The relays indicated in the table are 24 V DC for the digital input cards. These relays can be replaced by MICROSERIES relays with other voltages, from 5 V DC to 230 V DC.

PLC HONEYWELL C300

16-channel solution

	PLC		Cables		Connection		TERMSERIES adapter			
	Input/Output cards		Standard				TERMSERIES adapter (Relay 6.4 mm)			
							TERMSERIES adapter		Inputs or outputs with relays	
Manufacturer code	Number/ Type of channels	Order No.	Qty.	Screw connection	Tension-clamp connection	Order No.	Qty.	Order No.	Qty.	
DI	CC-TDIL01	32 DI, 24 Vdc ^{B)}	2021450xxx	2			1463550000	2	1123000000	32
					1123120000					
	CC-TDIL11	32 DI, 24 Vdc ^{B)}	2021450xxx	2			1463550000	2	1123000000	32
					1123120000					
DO	CC-TDOB01	32 DO, 24 Vdc ^{A)}	2021440xxx	2			1463550000	2	1122770000	32
					1122880000					
	CC-TDOB11	32 DO, 24 Vdc ^{A)}	2021440xxx	2			1463550000	2	1122780000	32
					1122890000					
Note	A) The TERMSERIES adapter switch, should be positioned on the "H" side. B) The TERMSERIES adapter switch, should be positioned on the "L" side.									

- The adapters should receive power from an external supply.
- The last 3 digits of the cable code indicates its length in decimeters. For example, if the code ends in 100, the cable would be 10 m long.
- The relays indicated in the table are 24 V DC for the digital input cards. These relays can be replaced by MICROSERIES relays with other voltages, from 5 V DC to 230 V DC.

PLC HONEYWELL C300

8-channel solution

	PLC		Cables		Connection		TERMSERIES adapter			
	Input/Output cards		Standard				TERMSERIES adapter (Relay 6.4 mm)			
							TERMSERIES adapter		Inputs or outputs with relays	
	Manufacturer code	Number/ Type of channels	Order No.	Qty.	Screw connection	Tension-clamp connection	Order No.	Qty.	Order No.	Qty.
DI	CC-TDIL01	32 DI, 24 Vdc ^{B)}	2065110xxx	2			1463530000	4	1123000000	32
	CC-TDIL11	32 DI, 24 Vdc ^{B)}	2065110xxx	2			1463530000	4	1123000000	32
									1123120000	
DO	CC-TDOB01	32 DO, 24 Vdc ^{A)}	2065100xxx	2			1463530000	4	1122770000	32
									1122880000	
	CC-TDOB11	32 DO, 24 Vdc ^{A)}	2065100xxx	2			1463530000	4	1122780000	32
									1122890000	
Note	A) The TERMSERIES adapter switch, should be positioned on the "L" side. B) The TERMSERIES adapter switch, should be positioned on the "N" side.									

- The adapters should receive power from an external supply.
- The last 3 digits of the cable code indicates its length in decimeters. For example, if the code ends in 100, the cable would be 10 m long.
- The relays indicated in the table are 24 V DC for the digital input cards. These relays can be replaced by MICROSERIES relays with other voltages, from 5 V DC to 230 V DC.

PLC MITSUBISHI MELSEC Q

8-channel solution

	PLC		Cables		Connection		TERMSERIES adapter				TERMSERIES adapter			
	Input/Output cards		Standard				TERMSERIES adapter (Relay 6.4 mm)				TERMSERIES adapter (Relay 12.8 mm)			
							TERMSERIES adapter		Inputs or outputs with relays		TERMSERIES adapter		Inputs or outputs with relays	
	Manufacturer code	Number/ Type of channels	Order No.	Qty.	Screw connection	Tension-clamp connection	Order No.	Qty.	Order No.	Qty.	Order No.	Qty.	Order No.	Qty.
DI	QX40	16 DI ^{A)}	1349730xxx	2			1463520000	2	1123000000 1123120000	16	1463540000	2	1123730000 1123850000	16
	QX40-S1	16 DI ^{A)}	1349730xxx	2			1463520000	2	1123000000 1123120000	16	1463540000	2	1123730000 1123850000	16
	QX41	32 DI ^{A)}	1512290xxx	1			1463520000	4	1123000000 1123120000	32	1463540000	4	1123730000 1123850000	32
	QX41-S1	32 DI ^{A)}	1512290xxx	1			1463520000	4	1123000000 1123120000	32	1463540000	4	1123730000 1123850000	32
	QX42	64 DI ^{A)}	1512290xxx	2			1463520000	8	1123000000 1123120000	64	1463540000	8	1123730000 1123850000	64
	QX42-S1	64 DI ^{A)}	1512290xxx	2			1463520000	8	1123000000 1123120000	64	1463540000	8	1123730000 1123850000	64
	QX80	16 DI ^{B)}	1349730xxx	2			1463520000	2	1123000000 1123120000	16	1463540000	2	1123730000 1123850000	16
	QX81	32 DI ^{B)}	1512320xxx	1			1463520000	4	1123000000 1123120000	32	1463540000	4	1123730000 1123850000	32
	QX82	64 DI ^{B)}	1512330xxx	2			1463520000	8	1123000000 1123120000	64	1463540000	8	1123730000 1123850000	64
	QX82-S1	64 DI ^{B)}	1512330xxx	2			1463520000	8	1123000000 1123120000	64	1463540000	8	1123730000 1123850000	64
DO	QY40P	16 DO ^{B)}	1349730xxx	2			1463520000	2	1122780000 1122890000	16	1463540000	2	1123500000 1123620000	16
	QY41P	32 DO ^{B)}	1512310xxx	1			1463520000	4	1122780000 1122890000	32	1463540000	4	1123500000 1123620000	32
	QY42P	64 DO ^{B)}	1512310xxx	2			1463520000	8	1122780000 1122890000	64	1463540000	8	1123500000 1123620000	64
	QY50	16 DO ^{B)}	1349730xxx	2			1463520000	2	1122780000 1122890000	16	1463540000	2	1123500000 1123620000	16
	QY80	16 DO ^{A)}	1349730xxx	2			1463520000	2	1122770000 1122880000	16	1463540000	2	1123490000 1123610000	16
DI/DO	QH42P	32 DI ^{A)}	1512290xxx	1			1463520000	4	1123000000 1123120000	32	1463540000	4	1123730000 1123850000	32
		32 DO ^{B)}	1512310xxx	1			1463520000	4	1122780000 1122890000	32	1463540000	4	1123500000 1123620000	32
	QX41Y41P	32 DI ^{A)}	1512290xxx	1			1463520000	4	1123000000 1123120000	32	1463540000	4	1123730000 1123850000	32
		32 DO ^{B)}	1512290xxx	1			1463520000	4	1122780000 1122890000	32	1463540000	4	1123500000 1123620000	32
Note	A) The TERMSERIES adapter switch, should be positioned on the "0" side. B) The TERMSERIES adapter switch, should be positioned on the "+V" side.													

Note

A) The TERMSERIES adapter switch, should be positioned on the "A" side.
B) The TERMSERIES adapter switch, should be positioned on the "B" side.

- The adapters should receive power from an external supply.
- The last 3 digits of the cable code indicates its length in decimeters. For example, if the code ends in 100, the cable would be 10 m long.
- The relays indicated in the table are chosen for 24 V DC control voltage. For digital input cards these can be replaced by TERMSERIES relays with control voltages from 5 V DC to 230 V AC.

PLC MITSUBISHI MELSEC Q

16-channel solution

	PLC		Cables		Connection		TERMSERIES adapter			
	Input/Output cards		Standard				TERMSERIES adapter (Relay 6.4 mm)			
							TERMSERIES adapter		Inputs or outputs with relays	
	Manufacturer code	Number/ Type of channels	Order No.	Qty.	Screw connection	Tension-clamp connection	Order No.	Qty.	Order No.	Qty.
DI	QX40	16 DI ^{A)}	7789100xxx	1			1463550000	1	1123000000	16
	QX40-S1	16 DI ^{A)}	7789100xxx	1			1463550000	1	1123120000	16
									1123000000	
	QX41	32 DI ^{A)}	7789681xxx	2			1463550000	2	1123000000	32
									1123120000	
	QX41-S1	32 DI ^{A)}	7789681xxx	2			1463550000	2	1123000000	32
									1123120000	
	QX42	64 DI ^{A)}	7789681xxx	4			1463550000	4	1123000000	64
									1123120000	
	QX42-S1	64 DI ^{A)}	7789681xxx	4			1463550000	4	1123000000	64
									1123120000	
	QX80	16 DI ^{B)}	7789100xxx	1			1463550000	1	1123000000	16
1123120000										
QX81	32 DI ^{B)}	1512340xxx	1			1463550000	2	1123000000	32	
								1123120000		
QX82	64 DI ^{B)}	7789683xxx	4			1463550000	4	1123000000	64	
								1123120000		
QX82-S1	64 DI ^{B)}	7789683xxx	4			1463550000	4	1123000000	64	
								1123120000		
DO	QY40P	16 DO ^{B)}	7789100xxx	1			1463550000	1	1122780000	16
	QY41P	32 DO ^{B)}	7789708xxx	2			1463550000	2	1122780000	32
									1122890000	
	QY42P	64 DO ^{B)}	7789708xxx	4			1463550000	4	1122780000	64
									1122890000	
QY50	16 DO ^{B)}	7789100xxx	2			1463550000	1	1122780000	16	
QY80	16 DO ^{A)}	7789100xxx	2			1463550000	1	1122770000	16	
								1122880000		
DI/DO	QH42P	32 DI ^{A)}	7789681xxx	2			1463550000	2	1123000000	32
		32 DO ^{B)}	7789708xxx	2			1463550000	2	1122780000	32
	QX41Y41P	32 DI ^{A)}	7789681xxx	2			1463550000	2	1123000000	32
		32 DO ^{B)}	7789708xxx	2			1463550000	2	1123120000	32
									1122780000	
								1122890000		
Note	A) The TERMSERIES adapter switch, should be positioned on the "-" side. B) The TERMSERIES adapter switch, should be positioned on the "+" side.									

Note

A) The TERMSERIES adapter switch, should be positioned on the "L" side.
B) The TERMSERIES adapter switch, should be positioned on the "H" side.

- The adapters should receive power from an external supply.
- The last 3 digits of the cable code indicates its length in decimeters. For example, if the code ends in 100, the cable would be 10 m long.
- The relays indicated in the table are chosen for 24 V DC control voltage. For digital input cards these can be replaced by TERMSERIES relays with control voltages from 5 V DC to 230 V AC.

PLC OMRON CJ1W

8-channel solution

	PLC		Cables		Connection		TERMSERIES adapter				TERMSERIES adapter				
	Input/Output cards		Standard				TERMSERIES adapter (Relay 6.4 mm)				TERMSERIES adapter (Relay 12.8 mm)				
							TERMSERIES adapter		Inputs or outputs with relays		TERMSERIES adapter		Inputs or outputs with relays		
	Manufacturer code	Number/ Type of channels	Order No.	Qty.	Screw connection	Tension-clamp connection	Order No.	Qty.	Order No.	Qty.	Order No.	Qty.	Order No.	Qty.	
DI	ID211	16 DI, positive logic ^{B)}	1511070xxx	1			1463520000	2	1123000000	16	1463540000	2	1123730000	16	
		16 DI, negative logic ^{A)}	1511090xxx	1			1463520000	2	1123000000	16	1463540000	2	1123730000	16	
	ID212	16 DI, positive logic ^{B)}	1511070xxx	1			1463520000	2	1123000000	16	1463540000	2	1123730000	16	
		16 DI, negative logic ^{A)}	1511090xxx	1			1463520000	2	1123000000	16	1463540000	2	1123730000	16	
	ID231	32 DI, positive logic ^{B)}	1511270xxx	1			1463520000	4	1123000000	32	1463540000	4	1123730000	32	
		32 DI, negative logic ^{A)}	1511290xxx	1			1463520000	4	1123000000	32	1463540000	4	1123730000	32	
	ID232	32 DI, positive logic ^{B)}	1511320xxx	1			1463520000	4	1123000000	32	1463540000	4	1123730000	32	
		32 DI, negative logic ^{A)}	1511330xxx	1			1463520000	4	1123000000	32	1463540000	4	1123730000	32	
	ID233	32 DI, positive logic ^{B)}	1511320xxx	1			1463520000	4	1123000000	32	1463540000	4	1123730000	32	
		32 DI, negative logic ^{A)}	1511330xxx	1			1463520000	4	1123000000	32	1463540000	4	1123730000	32	
	ID261	64 DI, positive logic ^{B)}	1511270xxx	2			1463520000	8	1123000000	64	1463540000	8	1123730000	64	
		64 DI, negative logic ^{A)}	1511290xxx	2			1463520000	8	1123000000	64	1463540000	8	1123730000	64	
	ID262	64 DI, positive logic ^{B)}	1511320xxx	2			1463520000	8	1123000000	64	1463540000	8	1123730000	64	
		64 DI, negative logic ^{A)}	1511330xxx	2			1463520000	8	1123000000	64	1463540000	8	1123730000	64	
	DO	OD201	8 DO ^{B)}	1511390xxx	1			1463520000	1	1122780000	8	1463540000	1	1123500000	8
		OD202	8 DO ^{A)}	1511390xxx	1			1463520000	1	1122770000	8	1463540000	1	1123490000	8
OD203		8 DO ^{B)}	1511420xxx	1			1463520000	1	1122780000	8	1463540000	1	1123500000	8	
OD204		8 DO ^{A)}	1511420xxx	1			1463520000	1	1122770000	8	1463540000	1	1123490000	8	
OD211		16 DO ^{B)}	1511120xxx	1			1463520000	2	1122780000	16	1463540000	2	1123500000	16	
OD212		16 DO ^{A)}	1511120xxx	1			1463520000	2	1122770000	16	1463540000	2	1123490000	16	
OD213		16 DO ^{B)}	1511120xxx	1			1463520000	2	1122780000	16	1463540000	2	1123500000	16	
OD231		32 DO ^{B)}	1511340xxx	1			1463520000	4	1122780000	32	1463540000	4	1123500000	32	
OD232		32 DO ^{A)}	1511370xxx	1			1463520000	4	1122770000	32	1463540000	4	1123490000	32	
OD233		32 DO ^{B)}	1511370xxx	1			1463520000	4	1122780000	32	1463540000	4	1123500000	32	
OD234		32 DO ^{B)}	1511370xxx	1			1463520000	4	1122780000	32	1463540000	4	1123500000	32	
OD261		64 DO ^{B)}	1511340xxx	2			1463520000	8	1122780000	64	1463540000	8	1123500000	64	
OD262		64 DO ^{A)}	1511370xxx	2			1463520000	8	1122770000	64	1463540000	8	1123490000	64	
OD263		64 DO ^{B)}	1511370xxx	2			1463520000	8	1122780000	64	1463540000	8	1123500000	64	
									1122890000				1123620000		
Note	A) The TERMSERIES adapter switch, should be positioned on the "I" side. B) The TERMSERIES adapter switch, should be positioned on the "+V" side.														

Note

A) The TERMSERIES adapter switch, should be positioned on the "A" side.
 B) The TERMSERIES adapter switch, should be positioned on the "A+" side.

- The adapters should receive power from an external supply.
- The last 3 digits of the cable code indicates its length in decimeters. For example, if the code ends in 100, the cable would be 10 m long.
- The relays indicated in the table are chosen for 24 V DC control voltage. For digital input cards these can be replaced by TERMSERIES relays with control voltages from 5 V DC to 230 V AC.

PLC OMRON CJ1W

8-channel solution

	PLC		Cables		Connection		TERMSERIES adapter				TERMSERIES adapter			
	Input/Output cards		Standard				TERMSERIES adapter (Relay 6.4 mm)				TERMSERIES adapter (Relay 12.8 mm)			
							TERMSERIES adapter		Inputs or outputs with relays		TERMSERIES adapter		Inputs or outputs with relays	
	Manufacturer code	Number/ Type of channels	Order No.	Qty.			Screw connection	Tension-clamp connection	Order No.	Qty.	Order No.	Qty.	Order No.	Qty.
DI/DO	MD231	16 DI, positive logic ^{B)}	1511130xxx	1			1463520000	2	1123000000	16	1463540000	2	1123730000	16
			1123120000			1123850000								
		16 DI, negative logic ^{A)}	1511140xxx	1			1463520000	2	1123000000	16	1463540000	2	1123730000	16
			1123120000			1123850000								
		16 DO ^{B)}	1511170xxx	1			1463520000	2	1122780000	16	1463540000	2	1123500000	16
			1122890000			1123620000								
	MD232	16 DI, positive logic ^{B)}	1511190xxx	1			1463520000	2	1123000000	16	1463540000	2	1123730000	16
			1123120000			1123850000								
		16 DI, negative logic ^{A)}	1511220xxx	1			1463520000	2	1123000000	16	1463540000	2	1123730000	16
			1123120000			1123850000								
		16 DO ^{A)}	1511240xxx	1			1463520000	2	1122770000	16	1463540000	2	1123490000	16
			1122880000			1123610000								
	MD233	16 DI, positive logic ^{B)}	1511190xxx	1			1463520000	2	1123000000	16	1463540000	2	1123730000	16
			1123120000			1123850000								
		16 DI, negative logic ^{A)}	1511220xxx	1			1463520000	2	1123000000	16	1463540000	2	1123730000	16
			1123120000			1123850000								
		16 DO ^{B)}	1511230xxx	1			1463520000	2	1122780000	16	1463540000	2	1123500000	16
			1122890000			1123620000								
	MD261	32 DI, positive logic ^{B)}	1511270xxx	1			1463520000	4	1123000000	32	1463540000	4	1123730000	32
			1123120000			1123850000								
		32 DI, negative logic ^{A)}	1511290xxx	1			1463520000	4	1123000000	32	1463540000	4	1123730000	32
			1123120000			1123850000								
		32 DO ^{B)}	1511340xxx	1			1463520000	4	1122780000	32	1463540000	4	1123500000	32
			1122890000			1123620000								
	MD263	32 DI, positive logic ^{B)}	1511320xxx	1			1463520000	4	1123000000	32	1463540000	4	1123730000	32
			1123120000			1123850000								
		32 DI, negative logic ^{A)}	1511330xxx	1			1463520000	4	1123000000	32	1463540000	4	1123730000	32
			1123120000			1123850000								
		32 DO ^{B)}	1511370xxx	1			1463520000	4	1122780000	32	1463540000	4	1123500000	32
			1122890000			1123620000								
Note	A) The TERMSERIES adapter switch, should be positioned on the "I" side. B) The TERMSERIES adapter switch, should be positioned on the "A" side.													

Note

A) The TERMSERIES adapter switch, should be positioned on the "L" side.
B) The TERMSERIES adapter switch, should be positioned on the "N+" side.

- The adapters should receive power from an external supply.
- The last 3 digits of the cable code indicates its length in decimeters. For example, if the code ends in 100, the cable would be 10 m long.
- The relays indicated in the table are chosen for 24 V DC control voltage. For digital input cards these can be replaced by TERMSERIES relays with control voltages from 5 V DC to 230 V AC.

PLC OMRON CJ1W

16-channel solution

	PLC		Cables		Connection		TERMSERIES adapter				
	Input/Output cards		Standard				TERMSERIES adapter (Relay 6.4 mm)				
							TERMSERIES adapter		Inputs or outputs with relays		
	Manufacturer code	Number/ Type of channels	Order No.	Qty.	Screw connection	Tension-clamp connection	Order No.	Qty.	Order No.	Qty.	
DI	ID211	16 DI, positive logic ^{B)}	7789645xxx	1			1463550000	1	1123000000	16	
		16 DI, negative logic ^{A)}	7789833xxx	1			1463550000	1	1123000000	16	
	ID212	16 DI, positive logic ^{B)}	7789645xxx	1			1463550000	1	1123000000	16	
		16 DI, negative logic ^{A)}	7789833xxx	1			1463550000	1	1123000000	16	
	ID231	32 DI, positive logic ^{B)}	7789771xxx	1			1463550000	2	1123000000	32	
		32 DI, negative logic ^{A)}	7789768xxx	1			1463550000	2	1123000000	32	
	ID232	32 DI, positive logic ^{B)}	7789772xxx	1			1463550000	2	1123000000	32	
		32 DI, negative logic ^{A)}	7789767xxx	1			1463550000	2	1123000000	32	
	ID233	32 DI, positive logic ^{B)}	7789772xxx	1			1463550000	2	1123000000	32	
		32 DI, negative logic ^{A)}	7789767xxx	1			1463550000	2	1123000000	32	
	ID261	64 DI, positive logic ^{B)}	7789771xxx	2			1463550000	4	1123000000	64	
		64 DI, negative logic ^{A)}	7789768xxx	2			1463550000	4	1123000000	64	
	ID262	64 DI, positive logic ^{B)}	7789772xxx	2			1463550000	4	1123000000	64	
		64 DI, negative logic ^{A)}	7789767xxx	2			1463550000	4	1123000000	64	
	DO	OD211	16 DO ^{B)}	7789794xxx	1			1463550000	1	1122780000	16
		OD212	16 DO ^{A)}	7789794xxx	1			1463550000	1	1122770000	16
OD213		16 DO ^{B)}	7789794xxx	1			1463550000	1	1122800000	16	
OD231		32 DO ^{B)}	7789793xxx	1			1463550000	2	1122780000	32	
OD232		32 DO ^{A)}	7789373xxx	1			1463550000	2	1122770000	32	
OD233		32 DO ^{B)}	7789373xxx	1			1463550000	2	1122800000	32	
OD234		32 DO ^{B)}	7789373xxx	1			1463550000	2	1122780000	32	
OD261		64 DO ^{B)}	7789793xxx	2			1463550000	4	1122780000	64	
OD262		64 DO ^{A)}	7789373xxx	1			1463550000	4	1122770000	64	
OD263		64 DO ^{B)}	7789373xxx	1			1463550000	4	1122780000	64	
									1122890000		
Note	A) The TERMSERIES adapter switch, should be positioned on the "A" side. B) The TERMSERIES adapter switch, should be positioned on the "B" side.										

Note

A) The TERMSERIES adapter switch, should be positioned on the "L" side.
B) The TERMSERIES adapter switch, should be positioned on the "N" side.

- The adapters should receive power from an external supply.
- The last 3 digits of the cable code indicates its length in decimeters. For example, if the code ends in 100, the cable would be 10 m long.
- The relays indicated in the table are chosen for 24 V DC control voltage. For digital input cards these can be replaced by TERMSERIES relays with control voltages from 5 V DC to 230 V AC.

PLC OMRON CJ1W

16-channel solution

	PLC		Cables		Connection		TERMSERIES adapter			
	Input/Output cards		Standard				TERMSERIES adapter (Relay 6.4 mm)			
							TERMSERIES adapter		Inputs or outputs with relays	
	Manufacturer code	Number/ Type of channels	Order No.	Qty.	Screw connection	Tension-clamp connection	Order No.	Qty.	Order No.	Qty.
DI/DO	MD231	16 DI, positive logic ^{B)}	1511430xxx	1			1463550000	1	1123000000	16
		16 DI, negative logic ^{A)}	1511440xxx	1			1463550000	1	1123000000	16
									1123120000	
									1123120000	16
		16 DO ^{B)}	1511470xxx	1			1463550000	1	1122780000	16
									1122890000	
	MD232	16 DI, positive logic ^{B)}	7789328xxx	1			1463550000	1	1123000000	16
									1123120000	
		16 DI, negative logic ^{A)}	7789329xxx	1			1463550000	1	1123000000	16
									1123120000	
		16 DO ^{A)}	7789329xxx	1			1463550000	1	1122770000	16
									1122880000	
	MD233	16 DI, positive logic ^{B)}	7789328xxx	1			1463550000	1	1123000000	16
									1123120000	
		16 DI, negative logic ^{A)}	7789329xxx	1			1463550000	1	1123000000	16
									1123120000	16
		16 DO ^{B)}	7789329xxx	1			1463550000	1	1122780000	16
									1122890000	
	MD261	32 DI, positive logic ^{B)}	7789771xxx	1			1463550000	2	1123000000	32
									1123120000	
		32 DI, negative logic ^{A)}	7789768xxx	1			1463550000	2	1123000000	32
									1123120000	
		32 DO ^{B)}	7789793xxx	1			1463550000	2	1122780000	32
									1122890000	
MD263	32 DI, positive logic ^{B)}	7789772xxx	1			1463550000	2	1123000000	32	
								1123120000		
	32 DI, negative logic ^{A)}	7789767xxx	1			1463550000	2	1123000000	32	
								1123120000		
	32 DO ^{B)}	7789373xxx	1			1463550000	2	1122780000	32	
								1122890000		
Note A) The TERMSERIES adapter switch, should be positioned on the "L" side. B) The TERMSERIES adapter switch, should be positioned on the "N" side.										

- The adapters should receive power from an external supply.
- The last 3 digits of the cable code indicates its length in decimeters. For example, if the code ends in 100, the cable would be 10 m long.
- The relays indicated in the table are chosen for 24 V DC control voltage. For digital input cards these can be replaced by TERMSERIES relays with control voltages from 5 V DC to 230 V AC.

PLC ROCKWELL COMPACT LOGIX

8-channel solution

	PLC		Cables		Connection		TERMSERIES adapter				TERMSERIES adapter				
	Input/Output cards		Standard				TERMSERIES adapter (Relay 6.4 mm)				TERMSERIES adapter (Relay 12.8 mm)				
							TERMSERIES adapter		Inputs or outputs with relays		TERMSERIES adapter		Inputs or outputs with relays		
	Manufacturer code	Number/ Type of channels	Order No.	Qty.	Screw connection	Tension-clamp connection	Order No.	Qty.	Order No.	Qty.	Order No.	Qty.	Order No.	Qty.	
DI	1769-IQ16	16 DI, positive logic ^{B)}	1511730xxx	1			1463520000	2	1123000000	16	1463540000	2	1123730000	16	
		16 DI, negative logic ^{A)}	1511740xxx	1			1463520000	2	1123000000	16	1463540000	2	1123730000	16	
									1123120000		1123850000				
		1769-IQ16F	16 DI, positive logic ^{B)}	1511730xxx	1			1463520000	2	1123000000	16	1463540000	2	1123730000	16
	16 DI, negative logic ^{A)}		1511740xxx	1			1463520000	2	1123000000	16	1463540000	2	1123730000	16	
									1123120000		1123850000				
	1769-IQ32		32 DI, positive logic ^{B)}	1511730xxx	1			1463520000	4	1123000000	32	1463540000	4	1123730000	32
		32 DI, negative logic ^{A)}	1511790xxx	1			1463520000	4	1123000000	32	1463540000	4	1123730000	32	
									1123120000		1123850000				
		1769-IQ32T	32 DI, positive logic ^{B)}	1511890xxx	1			1463520000	4	1123000000	32	1463540000	4	1123730000	32
	32 DI, negative logic ^{A)}		1511910xxx	1			1463520000	4	1123000000	32	1463540000	4	1123730000	32	
									1123120000		1123850000				
	DO		1769-OB8	8 DO ^{A)}	1511930xxx	1			1463520000	1	1122770000	8	1463540000	1	1123490000
		1122880000										1123610000			
		1769-OB16	16 DO ^{A)}	1511830xxx	1			1463520000	2	1122770000	16	1463540000	2	1123490000	16
										1122880000		1123610000			
1769-OB16P		16 DO ^{A)}	1511830xxx	1			1463520000	2	1122770000	16	1463540000	2	1123490000	16	
									1122880000		1123610000				
1769-OB32		32 DO ^{A)}	1511830xxx	1			1463520000	4	1122770000	32	1463540000	4	1123490000	32	
			1511870xxx	1					1122880000		1123610000				
1769-OB32T		32 DO ^{A)}	1511920xxx	1			1463520000	4	1122770000	32	1463540000	4	1123490000	32	
									1122880000		1123610000				
1769-OV16		16 DO ^{B)}	1511830xxx	1			1463520000	4	1122780000	32	1463540000	4	1123500000	32	
									1122890000		1123620000				
Note															
A) The TERMSERIES adapter switch, should be positioned on the "A" side. B) The TERMSERIES adapter switch, should be positioned on the "B" side.															

- The adapters should receive power from an external supply.
- The last 3 digits of the cable code indicates its length in decimeters. For example, if the code ends in 100, the cable would be 10 m long.
- The relays indicated in the table are chosen for 24 V DC control voltage. For digital input cards these can be replaced by TERMSERIES relays with control voltages from 5 V DC to 230 V AC.

PLC ROCKWELL COMPACT LOGIX

16-channel solution

	PLC		Cables		Connection		TERMSERIES adapter			
	Input/Output cards		Standard				TERMSERIES adapter (Relay 6.4 mm)			
							TERMSERIES adapter		Inputs or outputs with relays	
	Manufacturer code	Number/ Type of channels	Order No.	Qty.	Screw connection	Tension-clamp connection	Order No.	Qty.	Order No.	Qty.
DI	1769-IQ16	16 DI, positive logic ^{B)}	7789770xxx	1			1463550000	1	1123000000	16
									1123120000	
		16 DI, negative logic ^{A)}	7789831xxx	1			1463550000	1	1123000000	16
									1123120000	
	1769-IQ16F	16 DI, positive logic ^{B)}	7789770xxx	1			1463550000	1	1123000000	16
									1123120000	
		16 DI, negative logic ^{A)}	7789831xxx	1			1463550000	1	1123000000	16
									1123120000	
	1769-IQ32	32 DI, positive logic ^{B)}	7789770xxx	1			1463550000	2	1123000000	32
			7789695xxx	1			1463550000		1123120000	
		32 DI, negative logic ^{A)}	7789831xxx	1			1463550000	2	1123000000	32
			7789832xxx	1			1463550000		1123120000	
	1769-IQ32T	32 DI, positive logic ^{B)}	1489160xxx	1			1463550000	2	1123000000	32
									1123120000	
		32 DI, negative logic ^{A)}	1489180xxx	1			1463550000	2	1123000000	32
								1123120000		
DO	1769-OB16	16 DO ^{A)}	7789769xxx	1			1463550000	1	1122770000	16
					1122880000					
	1769-OB16P	16 DO ^{A)}	7789769xxx	1			1463550000	1	1122770000	16
					1122880000					
	1769-OB32	32 DO ^{A)}	7789769xxx	1			1463550000	2	1122770000	32
			7789697xxx	1					1122880000	
	1769-OB32T	32 DO ^{A)}	1489170xxx	1			1463550000	2	1122770000	32
									1122880000	
	1769-OV16	16 DO ^{B)}	7789769xxx	1			1463550000	1	1122780000	16
									1122890000	
Note	A) The TERMSERIES adapter switch, should be positioned on the "0" side. B) The TERMSERIES adapter switch, should be positioned on the "+A" side.									

Note

A) The TERMSERIES adapter switch, should be positioned on the "A" side.
B) The TERMSERIES adapter switch, should be positioned on the "B" side.

- The adapters should receive power from an external supply.
- The last 3 digits of the cable code indicates its length in decimeters. For example, if the code ends in 100, the cable would be 10 m long.
- The relays indicated in the table are chosen for 24 V DC control voltage. For digital input cards these can be replaced by TERMSERIES relays with control voltages from 5 V DC to 230 V AC.

PLC ROCKWELL CONTROL LOGIX

8-channel solution

	PLC		Cables		Connection		TERMSERIES adapter				TERMSERIES adapter			
	Input/Output cards		Standard				TERMSERIES adapter (Relay 6.4 mm)				TERMSERIES adapter (Relay 12.8 mm)			
							TERMSERIES adapter		Inputs or outputs with relays		TERMSERIES adapter		Inputs or outputs with relays	
	Manufacturer code	Number/ Type of channels	Order No.	Qty.			Screw connection	Tension-clamp connection	Order No.	Qty.	Order No.	Qty.	Order No.	Qty.
DI	1756-IB16	16 DI ^{B)}	1511970xxx	1			1463520000	2	1123000000	16	1463540000	2	1123730000	16
									1123120000				1123850000	
	1756-IB16D	16 DI ^{B)}	1511990xxx	1			1463520000	2	1123000000	16	1463540000	2	1123730000	16
									1123120000				1123850000	
	1756-IB16I	16 DI ^{B)}	1511990xxx	1			1463520000	2	1123000000	16	1463540000	2	1123730000	16
									1123120000				1123850000	
	1756-IB32	32 DI ^{B)}	1512010xxx	1			1463520000	4	1123000000	32	1463540000	4	1123730000	32
									1123120000				1123850000	
DO	1756-OB16D	16 DO ^{A)}	1512030xxx	1			1463520000	2	1122770000	16	1463540000	2	1123490000	16
									1122880000				1123610000	
	1756-OB16E	16 DO ^{A)}	1512040xxx	1			1463520000	2	1122770000	16	1463540000	2	1123490000	16
									1122880000				1123610000	
	1756-OB16I	16 DO ^{A)}	1512070xxx	1			1463520000	2	1122770000	16	1463540000	2	1123490000	16
									1122880000				1123610000	
	1756-OB32	32 DO ^{A)}	1512020xxx	1			1463520000	4	1122770000	32	1463540000	4	1123490000	32
									1122880000				1123610000	
	1756-OB8	8 DO ^{A)}	1512090xxx	1			1463520000	1	1122770000	8	1463540000	1	1123490000	8
									1122880000				1123610000	
	1756-OB8EI	8 DO ^{A)}	1512110xxx	1			1463520000	1	1122770000	8	1463540000	1	1123490000	8
									1122880000				1123610000	
	1756-OV16E	16 DO ^{B)}	1512040xxx	1			1463520000	2	1122780000	16	1463540000	2	1123500000	16
								1122890000				1123620000		
	1756-OV32E	32 DO ^{B)}	1512020xxx	1			1463520000	4	1122780000	32	1463540000	4	1123500000	32
								1122890000				1123620000		
Note	A) The TERMSERIES adapter switch, should be positioned on the "L" side. B) The TERMSERIES adapter switch, should be positioned on the "H" side.													

- The adapters should receive power from an external supply.
- The last 3 digits of the cable code indicates its length in decimeters. For example, if the code ends in 100, the cable would be 10 m long.
- The relays indicated in the table are chosen for 24 V DC control voltage. For digital input cards these can be replaced by TERMSERIES relays with control voltages from 5 V DC to 230 V AC.

PLC ROCKWELL CONTROL LOGIX

16-channel solution

	PLC		Cables		Connection		TERMSERIES adapter			
	Input/Output cards		Standard				TERMSERIES adapter (Relay 6.4 mm)			
							TERMSERIES adapter		Inputs or outputs with relays	
	Manufacturer code	Number/ Type of channels	Order No.	Qty.	Screw connection	Tension-clamp connection	Order No.	Qty.	Order No.	Qty.
DI	1756-IB16	16 DI ^{B)}	7789039xxx	1			1463550000	1	1123000000	16
	1756-IB16D	16 DI ^{B)}	7789049xxx	1			1463550000	1	1123000000	16
	1756-IB16I	16 DI ^{B)}	7789049xxx	1			1463550000	1	1123000000	16
	1756-IB32	32 DI ^{B)}	7789041xxx	1			1463550000	2	1123000000	32
	1756-OB16D	16 DO ^{A)}	7789040xxx	1			1463550000	1	1122770000	16
DO	1756-OB16E	16 DO ^{A)}	7789058xxx	1			1463550000	1	1122880000	16
	1756-OB16I	16 DO ^{A)}	7789059xxx	1			1463550000	1	1122770000	16
	1756-OB32	32 DO ^{A)}	7789042xxx	1			1463550000	2	1122770000	32
	1756-OB32	32 DO ^{A)}	7789042xxx	1			1463550000	2	1122880000	32
	1756-OB32	32 DO ^{A)}	7789042xxx	1			1463550000	2	1122770000	32
	1756-OB32	32 DO ^{A)}	7789042xxx	1			1463550000	2	1122880000	32
	1756-OB32	32 DO ^{A)}	7789042xxx	1			1463550000	2	1122880000	32
	1756-OB16E	16 DO ^{B)}	7789058xxx	1			1463550000	1	1122780000	16
	1756-OB32E	32 DO ^{B)}	7789042xxx	1			1463550000	2	1122890000	32
Note	A) The TERMSERIES adapter switch, should be positioned on the "−" side. B) The TERMSERIES adapter switch, should be positioned on the "+ " side.									

Note

A) The TERMSERIES adapter switch, should be positioned on the "A" side.
B) The TERMSERIES adapter switch, should be positioned on the "B" side.

- The adapters should receive power from an external supply.
- The last 3 digits of the cable code indicates its length in decimeters. For example, if the code ends in 100, the cable would be 10 m long.
- The relays indicated in the table are chosen for 24 V DC control voltage. For digital input cards these can be replaced by TERMSERIES relays with control voltages from 5 V DC to 230 V AC.

PLC SCHNEIDER M340

8-channel solution

	PLC		Cables		Connection		TERMSERIES adapter				TERMSERIES adapter			
	Input/Output cards		Standard				TERMSERIES adapter (Relay 6.4 mm)				TERMSERIES adapter (Relay 12.8 mm)			
							TERMSERIES adapter		Inputs or outputs with relays		TERMSERIES adapter		Inputs or outputs with relays	
	Manufacturer code	Number/ Type of channels	Order No.	Qty.	Screw connection	Tension-clamp connection	Order No.	Qty.	Order No.	Qty.	Order No.	Qty.	Order No.	Qty.
DI	BMX DAI 1602	16 DI, DC positive logic ^{B)}	1512120xxx	1			1463520000	2	1123000000	16	1463540000	2	1123730000	16
									1123120000				1123850000	
		16 DI, DC negative logic ^{A)}	1512130xxx	1			1463520000	2	1123000000	16	1463540000	2	1123730000	16
									1123120000				1123850000	
	BMX DDI 1602	16 DI ^{B)}	1512120xxx	1			1463520000	2	1123000000	16	1463540000	2	1123730000	16
									1123120000				1123850000	
DO	BMX DDO 1602	16 DO ^{A)}	1512120xxx	1			1463520000	2	1122770000	16	1463540000	2	1123490000	16
									1122880000				1123610000	
	BMX DDO 1612	16 DO ^{B)}	1512120xxx	1			1463520000	2	1122780000	16	1463540000	2	1123500000	16
									1122890000				1123620000	
	BMX DDO 3202K	32 DO ^{A)}	1512170xxx	1			1463520000	4	1122770000	32	1463540000	4	1123490000	32
									1122880000				1123610000	
DI/DO	BMX DDM 16022	8 DI ^{B)}	1512140xxx	1			1463520000	1	1123000000	8	1463540000	1	1123730000	8
										1123120000				1123850000
	8 DO ^{A)}						1463520000	1	1122770000	8	1463540000	1	1123490000	8
								1463520000	2	1123000000	16	1463540000	2	1123730000
	BMX DDM 3202K	16 DI ^{B)}	1512170xxx	1					1123120000				1123850000	
										1463520000	2	1122770000	16	1463540000
		16 DO ^{A)}						1122880000				1123610000		
Note	A) The TERMSERIES adapter switch, should be positioned on the "−" side. B) The TERMSERIES adapter switch, should be positioned on the "+−" side.													

Note A) The TERMSERIES adapter switch, should be positioned on the "A" side.
B) The TERMSERIES adapter switch, should be positioned on the "B" side.

- The adapters should receive power from an external supply.
- The last 3 digits of the cable code indicates its length in decimeters. For example, if the code ends in 100, the cable would be 10 m long.
- The relays indicated in the table are chosen for 24 V DC control voltage. For digital input cards these can be replaced by TERMSERIES relays with control voltages from 5 V DC to 230 V AC.

PLC SCHNEIDER M340

16-channel solution

	PLC		Cables		Connection		TERMSERIES adapter				
	Input/Output cards		Standard				TERMSERIES adapter (Relay 6.4 mm)				
							TERMSERIES adapter		Inputs or outputs with relays		
	Manufacturer code	Number/ Type of channels	Order No.	Qty.	Screw connection	Tension-clamp connection	Order No.	Qty.	Order No.	Qty.	
DI	BMX DAI 1602	16 DI, DC positive logic ^{B)}	7789380xxx	1			1463550000	1	1123000000	16	
		16 DI, DC negative logic ^{A)}	7789630xxx	1			1463550000	1	1123000000	16	
	BMX DDI 1602	16 DI ^{B)}	7789380xxx	1			1463550000	1	1123000000	16	
		32 DI ^{B)}	7789387xxx	1			1463550000	2	1123000000	32	
	BMX DDI 3202K	64 DI ^{B)}	7789387xxx	2			1463520000	4	1123000000	64	
									1123120000		
	DO	BMX DDO 1602	16 DO ^{A)}	7789380xxx	1			1463550000	1	1122770000	16
										1122880000	
BMX DDO 1612		16 DO ^{B)}	7789380xxx	1			1463550000	1	1122780000	16	
									1122890000		
BMX DDO 3202K		32 DO ^{A)}	7789387xxx	1			1463550000	2	1122770000	32	
									1122880000		
DI/DO		BMX DDM 3202K	64 DO ^{A)}	7789387xxx	2			1463550000	4	1122770000	64
										1122880000	
	16 DI ^{B)}		7789387xxx	1			1463520000	1	1123000000	16	
	16 DO ^{A)}						1463520000	1	1122770000	16	
								1122880000			
Note	A) The TERMSERIES adapter switch, should be positioned on the "0" side. B) The TERMSERIES adapter switch, should be positioned on the "+-" side.										

Note

A) The TERMSERIES adapter switch, should be positioned on the "L" side.
 B) The TERMSERIES adapter switch, should be positioned on the "N" side.

- The adapters should receive power from an external supply.
- The last 3 digits of the cable code indicates its length in decimeters. For example, if the code ends in 100, the cable would be 10 m long.
- The relays indicated in the table are chosen for 24 V DC control voltage. For digital input cards these can be replaced by TERMSERIES relays with control voltages from 5 V DC to 230 V AC.

PLC SCHNEIDER - PREMIUM

8-channel solution

	PLC		Cables		Connection		TERMSERIES adapter				TERMSERIES adapter			
	Input/Output cards		Standard				TERMSERIES adapter (Relay 6.4 mm)				TERMSERIES adapter (Relay 12.8 mm)			
							TERMSERIES adapter		Inputs or outputs with relays		TERMSERIES adapter		Inputs or outputs with relays	
	Manufacturer code	Number/ Type of channels	Order No.	Qty.			Screw connection	Tension-clamp connection	Order No.	Qty.	Order No.	Qty.	Order No.	Qty.
DI	TSX DEY 08D2	8 DI ^{B)}	1512430xxx	1			1463520000	1	1123000000	8	1463540000	1	1123730000	8
									1123120000				1123850000	
	TSX DEY 16D2	16 DI ^{B)}	1512440xxx	1			1463520000	2	1123000000	16	1463540000	2	1123730000	16
									1123120000				1123850000	
	TSX DEY 16FK	16 DI ^{B)}	1512470xxx	1			1463520000	2	1123000000	16	1463540000	2	1123730000	16
									1123120000				1123850000	
	TSX DEY 32D2K	32 DI ^{B)}	1512470xxx	2			1463520000	4	1123000000	32	1463540000	4	1123730000	32
									1123120000				1123850000	
	TSX DEY 64D2K	64 DI ^{B)}	1512470xxx	4			1463520000	8	1123000000	64	1463540000	8	1123730000	64
									1123120000				1123850000	
DO	TSX DSY 08T2	8 DO ^{A)}	1512430xxx	1			1463520000	1	1122770000	8	1463540000	1	1123490000	8
									1122880000				1123610000	
	TSX DSY 16T2	16 DO ^{A)}	1512440xxx	1			1463520000	2	1122770000	16	1463540000	2	1123490000	16
									1122880000				1123610000	
	TSX DSY 32T2K	32 DO ^{A)}	1512470xxx	2			1463520000	4	1122770000	32	1463540000	4	1123490000	32
									1122880000				1123610000	
	TSX DSY 64T2K	64 DO ^{A)}	1512470xxx	4			1463520000	8	1122770000	64	1463540000	8	1123490000	64
									1122880000				1123610000	
Note	A) The TERMSERIES adapter switch, should be positioned on the "-" side. B) The TERMSERIES adapter switch, should be positioned on the "+" side.													

- The adapters should receive power from an external supply.
- The last 3 digits of the cable code indicates its length in decimeters. For example, if the code ends in 100, the cable would be 10 m long.
- The relays indicated in the table are chosen for 24 V DC control voltage. For digital input cards these can be replaced by TERMSERIES relays with control voltages from 5 V DC to 230 V AC.

PLC SCHNEIDER - PREMIUM

16-channel solution

	PLC		Cables		Connection		TERMSERIES adapter			
	Input/Output cards		Standard				TERMSERIES adapter (Relay 6.4 mm)			
							TERMSERIES adapter		Inputs or outputs with relays	
Manufacturer code	Number/ Type of channels	Order No.	Qty.	Screw connection	Tension-clamp connection	Order No.	Qty.	Order No.	Qty.	
DI	TSX DEY 16D2	16 DI ^{B)}	7789322xxx	1			1463550000	1	1123000000	16
								1123120000		
	TSX DEY 16FK	16 DI ^{B)}	7789301xxx	1			1463550000	1	1123000000	16
								1123120000		
	TSX DEY 32D2K	32 DI ^{B)}	7789301xxx	2			1463550000	2	1123000000	32
								1123120000		
	TSX DEY 64D2K	64 DI ^{B)}	7789301xxx	4			1463550000	4	1123000000	64
								1123120000		
DO	TSX DSY 16T2	16 DO ^{A)}	7789322xxx	1			1463550000	1	1122770000	16
								1122880000		
	TSX DSY 32T2K	32 DO ^{A)}	7789301xxx	2			1463550000	2	1122770000	32
								1122880000		
	TSX DSY 64T2K	64 DO ^{A)}	7789301xxx	4			1463550000	4	1122770000	64
								1122880000		
Note	A) The TERMSERIES adapter switch, should be positioned on the "-" side. B) The TERMSERIES adapter switch, should be positioned on the "+" side.									

- The adapters should receive power from an external supply.
- The last 3 digits of the cable code indicates its length in decimeters. For example, if the code ends in 100, the cable would be 10 m long.
- The relays indicated in the table are chosen for 24 V DC control voltage. For digital input cards these can be replaced by TERMSERIES relays with control voltages from 5 V DC to 230 V AC.

PLC SCHNEIDER - QUANTUM

8-channel solution

	PLC		Cables		Connection		TERMSERIES adapter				TERMSERIES adapter				
	Input/Output cards		Standard				TERMSERIES adapter (Relay 6.4 mm)				TERMSERIES adapter (Relay 12.8 mm)				
							TERMSERIES adapter		Inputs or outputs with relays		TERMSERIES adapter		Inputs or outputs with relays		
Manufacturer code	Number/ Type of channels	Order No.	Qty.	Screw connection	Tension-clamp connection	Order No.	Qty.	Order No.	Qty.	Order No.	Qty.	Order No.	Qty.		
DI	140 DDI 353 00	32 DI ^{B)}	2021430xxx	1			1463520000	4	1123000000	32	1463540000	4	1123730000	32	
					1123120000	1123850000									
	140 DDI 364 00	96 DI ^{B)}	1512470xxx	6			1463520000	12	1123000000	96	1463540000	12	1123730000	96	
					1123120000	1123850000									
	140 DDI 853 00	32 DI ^{B)}	2021430xxx	1			1463520000	4	1123000000	32	1463540000	4	1123730000	32	
					1123120000	1123850000									
DO	140 DDO 353 00	32 DO ^{A)}	2021420xxx	1			1463520000	4	1122770000	32	1463540000	4	1123490000	32	
					1122880000	1123610000									
	140 DDO 364 00	96 DO ^{A)}	1512470xxx	6			1463520000	12	1122780000	96	1463540000	12	1123490000	96	
					1122890000	1123610000									
	Note														
	A) The TERMSERIES adapter switch, should be positioned on the "+" side. B) The TERMSERIES adapter switch, should be positioned on the "+" side.														

- The adapters should receive power from an external supply.
- The last 3 digits of the cable code indicates its length in decimeters. For example, if the code ends in 100, the cable would be 10 m long.
- The relays indicated in the table are 24 V DC for the digital input cards. These relays can be replaced by MICROSERIES relays with other voltages, from 5 V DC to 230 V DC.

PLC SCHNEIDER - QUANTUM

16-channel solution

	PLC		Cables		Connection		TERMSERIES adapter			
	Input/Output cards		Standard				TERMSERIES adapter (Relay 6.4 mm)			
							TERMSERIES adapter		Inputs or outputs with relays	
Manufacturer code	Number/ Type of channels	Order No.	Qty.	Screw connection	Tension-clamp connection	Order No.	Qty.	Order No.	Qty.	
DI	140 DDI 353 00	32 DI ^{B)}	1365740xxx	1			1463550000	2	1123000000	32
					1123120000					
	140 DDI 364 00	96 DI ^{B)}	7789303xxx	6			1463550000	6	1123000000	96
					1123120000					
	140 DDI 853 00	32 DI ^{B)}	1365740xxx	1			1463550000	2	1123000000	32
					1123120000					
DO	140 DDO 353 00	32 DO ^{A)}	1365740xxx	1			1463550000	2	1122770000	32
					1122880000					
	140 DDO 364 00	96 DO ^{A)}	7789303xxx	6			1463550000	6	1122780000	96
					1122890000					
	Note	A) The TERMSERIES adapter switch, should be positioned on the "+" side. B) The TERMSERIES adapter switch, should be positioned on the "+" side.								

- The adapters should receive power from an external supply.
- The last 3 digits of the cable code indicates its length in decimeters. For example, if the code ends in 100, the cable would be 10 m long.
- The relays indicated in the table are 24 V DC for the digital input cards. These relays can be replaced by MICROSERIES relays with other voltages, from 5 V DC to 230 V DC.

PLC SIEMENS S7-300

8-channel solution

	PLC		Cables		Connection		TERMSERIES adapter				TERMSERIES adapter			
	Input/Output cards		Standard				TERMSERIES adapter (Relay 6.4 mm)				TERMSERIES adapter (Relay 12.8 mm)			
							TERMSERIES adapter		Inputs or outputs with relays		TERMSERIES adapter		Inputs or outputs with relays	
Manufacturer code	Number/ Type of channels	Order No.	Qty.	Screw connection	Tension-clamp connection	Order No.	Qty.	Order No.	Qty.	Order No.	Qty.	Order No.	Qty.	
DI	6ES7321-1BH00-0AA0	16 DI ^{B)}	1512620xxx	1			1463520000	2	1123000000	16	1463540000	2	1123730000	16
									1123120000				1123850000	
	6ES7321-1BH01-0AA0	16 DI ^{B)}	1512620xxx	1			1463520000	2	1123000000	16	1463540000	2	1123730000	16
									1123120000				1123850000	
	6ES7321-1BH02-0AA0	16 DI ^{B)}	1512620xxx	1			1463520000	2	1123000000	16	1463540000	2	1123730000	16
									1123120000				1123850000	
	6ES7321-1BH50-0AA0	16 DI ^{A)}	1512620xxx	1			1463520000	2	1123000000	16	1463540000	2	1123730000	16
									1123120000				1123850000	
	6ES7321-1BH80-0AA0	16 DI ^{B)}	1512620xxx	1			1463520000	2	1123000000	16	1463540000	2	1123730000	16
									1123120000				1123850000	
	6ES7321-1BH81-0AA0	16 DI ^{B)}	1512620xxx	1			1463520000	2	1123000000	16	1463540000	2	1123730000	16
									1123120000				1123850000	
	6ES7321-1BH82-0AA0	16 DI ^{B)}	1512620xxx	1			1463520000	2	1123000000	16	1463540000	2	1123730000	16
									1123120000				1123850000	
	6ES7321-1BL00-0AA0	32 DI ^{B)}	1512640xxx	1			1463520000	4	1123000000	32	1463540000	4	1123730000	32
									1123120000				1123850000	
6ES7321-1BL80-0AA0	32 DI ^{B)}	1512640xxx	1			1463520000	4	1123000000	32	1463540000	4	1123730000	32	
								1123120000				1123850000		
DO	6ES7321-1BP00-0AA0	64 DI, positive logic ^{B)} 64 DI, negative logic ^{A)}	1512650xxx	2			1463520000	8	1123000000	64	1463540000	8	1123730000	64
									1123120000				1123850000	
			1512680xxx	2			1463520000	8	1123000000	64	1463540000	8	1123730000	64
									1123120000				1123850000	
	6ES7321-7BH00-0AB0	16 DI ^{B)}	1512630xxx	1			1463520000	2	1123000000	16	1463540000	2	1123730000	16
									1123120000				1123850000	
	6ES7321-7BH01-0AB0	16 DI ^{B)}	1512630xxx	1			1463520000	2	1123000000	16	1463540000	2	1123730000	16
									1123120000				1123850000	
	6ES7321-7BH80-0AB0	16 DI ^{B)}	1512630xxx	1			1463520000	2	1123000000	16	1463540000	2	1123730000	16
									1123120000				1123850000	
	6ES7322-1BF00-0AA0	8 DO ^{A)}	1512600xxx	1			1463520000	1	1122770000	8	1463540000	1	1123490000	8
									1122880000				1123610000	
	6ES7322-1BF01-0AA0	8 DO ^{A)}	1512600xxx	1			1463520000	1	1122770000	8	1463540000	1	1123490000	8
									1122880000				1123610000	
	6ES7322-1BH00-0AA0	16 DO ^{A)}	1512620xxx	1			1463520000	2	1122770000	16	1463540000	2	1123490000	16
									1122880000				1123610000	
6ES7322-1BH10-0AA0	16 DO ^{A)}	1512620xxx	1			1463520000	2	1122770000	16	1463540000	2	1123490000	16	
								1122880000				1123610000		
6ES7322-1BH81-0AA0	16 DO ^{A)}	1512620xxx	1			1463520000	2	1122770000	16	1463540000	2	1123490000	16	
								1122880000				1123610000		
6ES7322-1BL00-0AA0	32 DO ^{A)}	1512640xxx	1			1463520000	4	1122770000	32	1463540000	4	1123490000	32	
								1122880000				1123610000		
6ES7322-1BP00-0AA0	64 DO ^{A)}	1513340xxx	2			1463520000	8	1122770000	64	1463540000	8	1123490000	64	
								1122880000				1123610000		
6ES7322-1BP50-0AA0	64 DO ^{B)}	1513340xxx	2			1463520000	8	1122780000	64	1463540000	8	1123500000	64	
								1122890000				1123620000		
Note	A) The TERMSERIES adapter switch, should be positioned on the "A" side. B) The TERMSERIES adapter switch, should be positioned on the "A+" side.													

- The adapters should receive power from an external supply.
- The last 3 digits of the cable code indicates its length in decimeters. For example, if the code ends in 100, the cable would be 10 m long.
- The relays indicated in the table are chosen for 24 V DC control voltage. For digital input cards these can be replaced by TERMSERIES relays with control voltages from 5 V DC to 230 V AC.

PLC SIEMENS S7-300

16-channel solution

	PLC		Cables		Connection		TERMSERIES adapter			
	Input/Output cards		Standard				TERMSERIES adapter (Relay 6.4 mm)			
							TERMSERIES adapter		Inputs or outputs with relays	
	Manufacturer code	Number/ Type of channels	Order No.	Qty.	Screw connection	Tension-clamp connection	Order No.	Qty.	Order No.	Qty.
DI	6ES7321-1BH00-0AA0	16 DI ^{B)}	7789234xxx	1			1463550000	1	1123000000	16
	6ES7321-1BH01-0AA0	16 DI ^{B)}	7789234xxx	1			1463550000	1	1123000000	16
	6ES7321-1BH02-0AA0	16 DI ^{B)}	7789234xxx	1			1463550000	1	1123000000	16
	6ES7321-1BH50-0AA0	16 DI ^{A)}	7789234xxx	1			1463550000	1	1123000000	16
	6ES7321-1BH80-0AA0	16 DI ^{B)}	7789234xxx	1			1463550000	1	1123000000	16
	6ES7321-1BH81-0AA0	16 DI ^{B)}	7789234xxx	1			1463550000	1	1123000000	16
	6ES7321-1BH82-0AA0	16 DI ^{B)}	7789234xxx	1			1463550000	1	1123000000	16
	6ES7321-1BL00-0AA0	32 DI ^{B)}	7789236xxx	1			1463550000	2	1123000000	32
	6ES7321-1BL80-0AA0	32 DI ^{B)}	7789236xxx	1			1463550000	2	1123000000	32
	6ES7321-1BP00-0AA0	64 DI, positive logic ^{B)}	7789771xxx	2			1463550000	4	1123000000	64
		64 DI, negative logic ^{A)}	7789768xxx	2			1463550000	4	1123000000	64
	6ES7321-7BH00-0AB0	16 DI ^{B)}	7789192xxx	1			1463550000	1	1123000000	16
	6ES7321-7BH01-0AB0	16 DI ^{B)}	7789192xxx	1			1463550000	1	1123000000	16
	6ES7321-7BH80-0AB0	16 DI ^{B)}	7789192xxx	1			1463550000	1	1123000000	16
	DO	6ES7322-1BH00-0AA0	16 DO ^{A)}	7789234xxx	1			1463550000	1	1122770000
6ES7322-1BH01-0AA0		16 DO ^{A)}	7789234xxx	1			1463550000	1	1122770000	16
6ES7322-1BH10-0AA0		16 DO ^{A)}	7789234xxx	1			1463550000	1	1122770000	16
6ES7322-1BH81-0AA0		16 DO ^{A)}	7789234xxx	1			1463550000	1	1122770000	16
6ES7322-1BL00-0AA0		32 DO ^{A)}	7789236xxx	1			1463550000	2	1122770000	32
6ES7322-1BP00-0AA0		64 DO ^{A)}	7789246xxx	1			1463550000	4	1122770000	64
6ES7322-1BP50-0AA0		64 DO ^{B)}	7789246xxx	1			1463550000	4	1122780000	64
									1122890000	
Note	A) The TERMSERIES adapter switch, should be positioned on the "+" side. B) The TERMSERIES adapter switch, should be positioned on the "-" side.									

Note

A) The TERMSERIES adapter switch, should be positioned on the "L" side.
B) The TERMSERIES adapter switch, should be positioned on the "N" side.

- The adapters should receive power from an external supply.
- The last 3 digits of the cable code indicates its length in decimeters. For example, if the code ends in 100, the cable would be 10 m long.
- The relays indicated in the table are chosen for 24 V DC control voltage. For digital input cards these can be replaced by TERMSERIES relays with control voltages from 5 V DC to 230 V AC.

PLC SIEMENS S7-400

8-channel solution

	PLC		Cables		Connection		TERMSERIES adapter				TERMSERIES adapter			
	Input/Output cards		Standard				TERMSERIES adapter (Relay 6.4 mm)				TERMSERIES adapter (Relay 12.8 mm)			
							TERMSERIES adapter		Inputs or outputs with relays		TERMSERIES adapter		Inputs or outputs with relays	
	Manufacturer code	Number/ Type of channels	Order No.	Qty.	Screw connection	Tension-clamp connection	Order No.	Qty.	Order No.	Qty.	Order No.	Qty.	Order No.	Qty.
DI	6ES7421-1BL00-0AA0	32 DI ^{A)}	1512490xxx	1			1463520000	4	1123000000	32	1463540000	4	1123730000	32
							1123120000					1123850000		
	6ES7421-1BL01-0AA0	32 DI ^{A)}	1512490xxx	1			1463520000	4	1123000000	32	1463540000	4	1123730000	32
							1123120000					1123850000		
DO	6ES7422-1BH10-0AA0	16 DO ^{B)}	1512510xxx	1			1463520000	2	1122770000	16	1463540000	2	1123490000	16
							1122880000					1123610000		
	6ES7422-1BH11-0AA0	16 DO ^{B)}	1512510xxx	1			1463520000	2	1122770000	16	1463540000	2	1123490000	16
							1122880000					1123610000		
	6ES7422-1BL00-0AA0	32 DO ^{B)}	1512490xxx	1			1463520000	4	1122770000	32	1463540000	4	1123490000	32
							1122880000					1123610000		
	6ES7422-5EH10-0AB0	16 DO ^{B)}	1512520xxx	1			1463520000	2	1122770000	16	1463540000	2	1123490000	16
							1122880000					1123610000		
	6ES7422-7BL00-0AB0	32 DO ^{B)}	1512490xxx	1			1463520000	4	1122770000	32	1463540000	4	1123490000	32
							1122880000					1123610000		
Note	A) The TERMSERIES adapter switch, should be positioned on the "-" side. B) The TERMSERIES adapter switch, should be positioned on the "+" side.													

- The adapters should receive power from an external supply.
- The last 3 digits of the cable code indicates its length in decimeters. For example, if the code ends in 100, the cable would be 10 m long.
- The relays indicated in the table are chosen for 24 V DC control voltage. For digital input cards these can be replaced by TERMSERIES relays with control voltages from 5 V DC to 230 V AC.

PLC SIEMENS S7-400

16-channel solution

	PLC		Cables		Connection		TERMSERIES adapter			
	Input/Output cards		Standard				TERMSERIES adapter (Relay 6.4 mm)			
							TERMSERIES adapter		Inputs or outputs with relays	
	Manufacturer code	Number/ Type of channels	Order No.	Qty.	Screw connection	Tension-clamp connection	Order No.	Qty.	Order No.	Qty.
DI	6ES7421-1BL00-0AA0	32 DI ^{A)}	7789292xxx	1			1463550000	2	1123000000	32
	6ES7421-1BL01-0AA0	32 DI ^{A)}	7789292xxx	1			1463550000	2	1123000000	32
DO	6ES7422-1BH10-0AA0	16 DO ^{B)}	7789291xxx	1			1463550000	1	1122770000	16
	6ES7422-1BH11-0AA0	16 DO ^{B)}	7789291xxx	1			1463550000	1	1122880000	16
	6ES7422-1BL00-0AA0	32 DO ^{B)}	7789292xxx	1			1463550000	2	1122770000	32
	6ES7422-5EH10-0AB0	16 DO ^{B)}	7789291xxx	1			1463550000	1	1122880000	16
	6ES7422-7BL00-0AB0	32 DO ^{B)}	7789292xxx	1			1463550000	2	1122770000	32
									1122880000	
									1122770000	
									1122880000	
Note	A) The TERMSERIES adapter switch, should be positioned on the "+" side. B) The TERMSERIES adapter switch, should be positioned on the "+" side.									

- The adapters should receive power from an external supply.
- The last 3 digits of the cable code indicates its length in decimeters. For example, if the code ends in 100, the cable would be 10 m long.
- The relays indicated in the table are chosen for 24 V DC control voltage. For digital input cards these can be replaced by TERMSERIES relays with control voltages from 5 V DC to 230 V AC.

PLC SIEMENS S7-1500

8-channel solution

	PLC		Cables		Connection		TERMSERIES adapter				TERMSERIES adapter			
	Input/Output cards		Standard				TERMSERIES adapter (Relay 6.4 mm)				TERMSERIES adapter (Relay 12.8 mm)			
							TERMSERIES adapter		Inputs or outputs with relays		TERMSERIES adapter		Inputs or outputs with relays	
	Manufacturer code	Number/ Type of channels	Order No.	Qty.			Screw connection	Tension-clamp connection	Order No.	Qty.	Order No.	Qty.	Order No.	Qty.
DI	6ES7521-1BH00-0AB0	16 DI ^{B)}	1512530xxx	1			1463520000	2	1123000000	16	1463540000	2	1123730000	16
									1123120000				1123850000	
	6ES7521-1BL00-0AB0	32 DI ^{B)}	1512590xxx	1			1463520000	4	1123000000	32	1463540000	4	1123730000	32
									1123120000				1123850000	
	6ES7521-1BH50-0AA0	16 DI ^{A)}	1512540xxx	1			1463520000	2	1123000000	16	1463540000	2	1123730000	16
									1123120000				1123850000	
DO	6ES7522-1BF00-0AB0	8 DO ^{A)}	1512570xxx	1			1463520000	1	1122770000	8	1463540000	1	1123490000	8
									1122880000				1123610000	
	6ES7522-1BH00-0AB0	16 DO ^{A)}	1512530xxx	1			1463520000	2	1122770000	16	1463540000	2	1123490000	16
									1122880000				1123610000	
	6ES7522-1BL00-0AB0	32 DO ^{A)}	1512590xxx	1			1463520000	4	1122770000	32	1463540000	4	1123490000	32
									1122880000				1123610000	
Note	A) The TERMSERIES adapter switch, should be positioned on the "+" side. B) The TERMSERIES adapter switch, should be positioned on the "+" side.													

- The adapters should receive power from an external supply.
- The last 3 digits of the cable code indicates its length in decimeters. For example, if the code ends in 100, the cable would be 10 m long.
- The relays indicated in the table are chosen for 24 V DC control voltage. For digital input cards these can be replaced by TERMSERIES relays with control voltages from 5 V DC to 230 V AC.

PLC SIEMENS S7-1500

16-channel solution

	PLC		Cables		Connection		TERMSERIES adapter			
	Input/Output cards		Standard				TERMSERIES adapter (Relay 6.4 mm)			
							TERMSERIES adapter		Inputs or outputs with relays	
	Manufacturer code	Number/ Type of channels	Order No.	Qty.	Screw connection	Tension-clamp connection	Order No.	Qty.	Order No.	Qty.
DI	6ES7521-1BH00-0AB0	16 DI ^{B)}	1462090xxx	1			1463550000	1	1123000000	16
								1123120000		
	6ES7521-1BL00-0AB0	32 DI ^{B)}	1462040xxx	1			1463550000	2	1123000000	32
									1123120000	
	6ES7521-1BH50-0AA0	16 DI ^{A)}	1462100xxx	1			1463550000	1	1123000000	16
									1123120000	
DO	6ES7522-1BH00-0AB0	16 DO ^{A)}	1462090xxx	1			1463550000	1	1122770000	16
									1122880000	
	6ES7522-1BL00-0AB0	32 DO ^{A)}	1462040xxx	1			1463550000	2	1122770000	32
									1122880000	
Note	A) The TERMSERIES adapter switch, should be positioned on the "−" side. B) The TERMSERIES adapter switch, should be positioned on the "+/−" side.									

- The adapters should receive power from an external supply.
- The last 3 digits of the cable code indicates its length in decimeters. For example, if the code ends in 100, the cable would be 10 m long.
- The relays indicated in the table are chosen for 24 V DC control voltage. For digital input cards these can be replaced by TERMSERIES relays with control voltages from 5 V DC to 230 V AC.

PLC YOKOGAWA CENTUM

8-channel solution

	PLC		Cables		Connection		TERMSERIES adapter				TERMSERIES adapter			
	Input/Output cards		Standard				TERMSERIES adapter (Relay 6.4 mm)				TERMSERIES adapter (Relay 12.8 mm)			
							TERMSERIES adapter		Inputs or outputs with relays		TERMSERIES adapter		Inputs or outputs with relays	
	Manufacturer code	Number/ Type of channels	Order No.	Qty.	Screw connection	Tension-clamp connection	Order No.	Qty.	Order No.	Qty.	Order No.	Qty.	Order No.	Qty.
DI	ADV151	32 DI, positive logic ^{B)}	1512190xxx	1			1463520000	4	1123000000	32	1463540000	4	1123730000	32
		32 DI, negative logic ^{A)}	1512210xxx	1			1463520000	4	1123000000	32	1463540000	4	1123730000	32
	ADV161	64 DI, positive logic ^{B)}	1512190xxx	2			1463520000	8	1123000000	64	1463540000	8	1123730000	64
		64 DI, negative logic ^{A)}	1512210xxx	2			1463520000	8	1123000000	64	1463540000	8	1123730000	64
DO	ADV551	32 DO ^{B)}	1512220xxx	1			1463520000	4	1122780000	32	1463540000	8	1123500000	32
	ADV561	64 DO ^{B)}	1512220xxx	2			1463520000	8	1122780000	64	1463540000	8	1123500000	64
Note	A) The TERMSERIES adapter switch, should be positioned on the "+" side. B) The TERMSERIES adapter switch, should be positioned on the "+-" side.													

- The adapters should receive power from an external supply.
- The last 3 digits of the cable code indicates its length in decimeters. For example, if the code ends in 100, the cable would be 10 m long.
- The relays indicated in the table are chosen for 24 V DC control voltage. For digital input cards these can be replaced by TERMSERIES relays with control voltages from 5 V DC to 230 V AC.

PLC YOKOGAWA CENTUM

16-channel solution

	PLC		Cables		Connection		TERMSERIES adapter			
	Input/Output cards		Standard				TERMSERIES adapter (Relay 6.4 mm)			
							TERMSERIES adapter		Inputs or outputs with relays	
	Manufacturer code	Number/ Type of channels	Order No.	Qty.	Screw connection	Tension-clamp connection	Order No.	Qty.	Order No.	Qty.
DI	ADV151	32 DI, positive logic ^{B)}	1512230xxx	1			1463550000	2	1123000000	32
									1123120000	
		32 DI, negative logic ^{A)}	1512240xxx	1			1463550000	2	1123000000	32
									1123120000	
	ADV161	64 DI, positive logic ^{B)}	1512230xxx	2			1463550000	4	1123000000	64
									1123120000	
64 DI, negative logic ^{A)}		1512240xxx	2			1463550000	4	1123000000	64	
								1123120000		
DO	ADV551	32 DO ^{B)}	1512270xxx	1			1463550000	2	1122780000	32
									1122890000	
										1122780000
	ADV561	64 DO ^{B)}	1512270xxx	2			1463550000	4	1122890000	
Note	A) The TERMSERIES adapter switch, should be positioned on the "+" side. B) The TERMSERIES adapter switch, should be positioned on the "+-" side.									

- The adapters should receive power from an external supply.
- The last 3 digits of the cable code indicates its length in decimeters. For example, if the code ends in 100, the cable would be 10 m long.
- The relays indicated in the table are chosen for 24 V DC control voltage. For digital input cards these can be replaced by TERMSERIES relays with control voltages from 5 V DC to 230 V AC.

PLC YOKOGAWA STARDOM

8-channel solution

	PLC		Cables		Connection		TERMSERIES adapter				TERMSERIES adapter				
	Input/Output cards		Standard				TERMSERIES adapter (Relay 6.4 mm)				TERMSERIES adapter (Relay 12.8 mm)				
							TERMSERIES adapter		Inputs or outputs with relays		TERMSERIES adapter		Inputs or outputs with relays		
	Manufacturer code	Number/ Type of channels	Order No.	Qty.			Screw connection	Tension-clamp connection	Order No.	Qty.	Order No.	Qty.	Order No.	Qty.	Order No.
DI	NFDV151	32 DI, positive logic ^{B)}	1512190xxx	1			1463520000	4	1123000000	32	1463540000	4	1123730000	32	
		32 DI, negative logic ^{A)}	1512210xxx	1			1463520000	4	1123000000	32	1463540000	4	1123730000	32	
	NFDV161	64 DI, positive logic ^{B)}	1512190xxx	2			1463520000	8	1123000000	64	1463540000	8	1123730000	64	
		64 DI, negative logic ^{A)}	1512210xxx	2			1463520000	8	1123000000	64	1463540000	8	1123730000	64	
	DO	NFDV551	32 DO ^{B)}	1512220xxx	1			1463520000	4	1122780000	32	1463540000	8	1123500000	32
		NFDV561	64 DO ^{B)}	1512220xxx	2			1463520000	8	1122780000	64	1463540000	8	1123500000	64
Note	A) The TERMSERIES adapter switch, should be positioned on the "+" side. B) The TERMSERIES adapter switch, should be positioned on the "-" side.														

- The adapters should receive power from an external supply.
- The last 3 digits of the cable code indicates its length in decimeters. For example, if the code ends in 100, the cable would be 10 m long.
- The relays indicated in the table are chosen for 24 V DC control voltage. For digital input cards these can be replaced by TERMSERIES relays with control voltages from 5 V DC to 230 V AC.

PLC YOKOGAWA STARDOM

16-channel solution

	PLC		Cables		Connection		TERMSERIES adapter				
	Input/Output cards		Standard				TERMSERIES adapter (Relay 6.4 mm)				
							TERMSERIES adapter		Inputs or outputs with relays		
	Manufacturer code	Number/ Type of channels	Order No.	Qty.	Screw connection	Tension-clamp connection	Order No.	Qty.	Order No.	Qty.	
DI	NFDV151	32 DI, positive logic ^{B)}	1512230xxx	1			1463550000	2	1123000000	32	
		32 DI, negative logic ^{A)}	1512240xxx	1			1463550000	2	1123000000		
	NFDV161	64 DI, positive logic ^{B)}	1512230xxx	2			1463550000	4	1123000000	64	
		64 DI, negative logic ^{A)}	1512240xxx	2			1463550000	4	1123000000		
	DO	NFDV551	32 DO ^{B)}	1512270xxx	1			1463550000	2	1122780000	32
										1122890000	
NFDV561		64 DO ^{B)}	1512270xxx	2			1463550000	4	1122780000	64	
								1122890000			
Note	A) The TERMSERIES adapter switch, should be positioned on the "+" side. B) The TERMSERIES adapter switch, should be positioned on the "-" side.										

- The adapters should receive power from an external supply.
- The last 3 digits of the cable code indicates its length in decimeters. For example, if the code ends in 100, the cable would be 10 m long.
- The relays indicated in the table are chosen for 24 V DC control voltage. For digital input cards these can be replaced by TERMSERIES relays with control voltages from 5 V DC to 230 V AC.

PLC WEIDMÜLLER U-REMOTE

8-channel solution

	PLC		Cables		Connection		TERMSERIES adapter				TERMSERIES adapter			
	Input/Output cards		Standard				TERMSERIES adapter (Relay 6.4 mm)				TERMSERIES adapter (Relay 12.8 mm)			
							TERMSERIES adapter		Inputs or outputs with relays		TERMSERIES adapter		Inputs or outputs with relays	
	Manufacturer code	Number/ Type of channels	Order No.	Qty.	Screw connection	Tension-clamp connection	Order No.	Qty.	Order No.	Qty.	Order No.	Qty.	Order No.	Qty.
DI	UR20-16DI-P-PLC-INT ^{B)}	16 DI	1512470xxx	1			1463520000	2	1123000000	16	1463540000	2	1123730000	16
					1123120000	1123850000								
DO	UR20-16DO-P-PLC-INT ^{A)}	16 DO	1512470xxx	1			1463520000	2	1122770000	16	1463540000	2	1123490000	16
					1122880000	1123610000								
Note	A) The TERMSERIES adapter switch, should be positioned on the "+" side. B) The TERMSERIES adapter switch, should be positioned on the "+" side.													

- The adapters should receive power from an external supply.
- The last 3 digits of the cable code indicates its length in decimeters. For example, if the code ends in 100, the cable would be 10 m long.
- The relays indicated in the table are 24 V DC for the digital input cards. These relays can be replaced by TERMSERIES relays with other voltages, from 5 V DC to 230 V DC.

E PLC WEIDMÜLLER U-REMOTE

16-channel solution

	PLC		Cables		Connection		TERMSERIES adapter			
	Input/Output cards		Standard				TERMSERIES adapter (Relay 6.4 mm)			
							TERMSERIES adapter		Inputs or outputs with relays	
	Manufacturer code	Number/Type of channels	Order No.	Qty.	Screw connection	Tension-clamp connection	Order No.	Qty.	Order No.	Qty.
DI	UR20-16DI-P-PLC-INT ^{B)}	16 DI	1349670xxx	1			1463550000	1	1123000000	16
									1123120000	
DO	UR20-16DO-P-PLC-INT ^{A)}	16 DO	1349670xxx	1			1463550000	1	1122770000	16
									1122880000	
Note	A) The TERMSERIES adapter switch, should be positioned on the "+" side. B) The TERMSERIES adapter switch, should be positioned on the "+" side.									



- The adapters should receive power from an external supply.
- The last 3 digits of the cable code indicates its length in decimeters. For example, if the code ends in 100, the cable would be 10 m long.
- The relays indicated in the table are 24 V DC for the digital input cards. These relays can be replaced by TERMSERIES relays with other voltages, from 5 V DC to 230 V DC.

TERMSERIES adapters

TERMSERIES adapters

- Suitable for input and output logic
- Version for 6.4mm TERMSERIES base
- Supply connections (PUSH IN) in double execution for supply voltage bridging
- User-friendly and unmistakable marking
- 10-pin connector according to DIN EN 60603-13

TIA F10

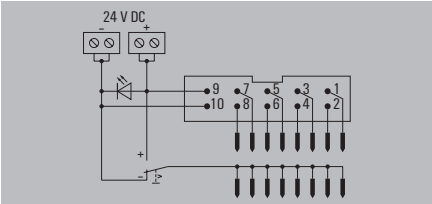

Technical data

Supply	
Supply voltage	24 V DC ± 20 %
Status display	Green LED
Signals	
Rated voltage	24 V DC
Voltage, max.	30 V DC
Rated current (per signal path)	125 mA
Current (per signal path), max.	1 A
Total current of all signals, max.	1 A
Number of signal paths	8
Connection data (supply)	
Wire connection method	PUSH IN
Clamping range, rated connection, min.	0.13 mm ²
Clamping range, rated connection, max.	1.5 mm ²
Number of terminals	4 (+, +, -, -)
Connection data (signal)	
Plug type	10-pole plug according to DIN EN 60603-13, long locking lever
General data	
Ambient temperature (operational)	-40 °C...60 °C
Storage temperature	-40 °C...85 °C
Humidity	5...95% (indoor), T _a = 40°C, no condensation
UL 94 flammability rating	V-0
Approvals	CE; cULus; GL
Insulation coordination	
Pollution degree	2
Overvoltage category	III
Impulse withstand voltage	1.5 kV
Rated voltage	32 V
Protection degree	IP 20 in installed condition

Dimensions	
Depth x width x height	mm

62 / 51 / 43

Note

Ordering data

--

Type	Qty.	Order No.
TIA F10	1	1463520000


Note

Suitable for 6.4mm wide TERMSERIES base

Accessories

Note

Potential change-over switch



The potential change-over switch is located between contact rows of the TERMSERIES adaptor. It is used to switch the potential of the lower contact row to "+" or "-" potential of the supply voltage.

Installation input

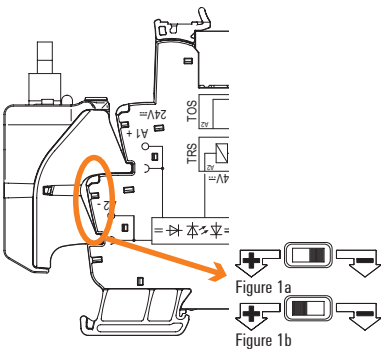


Figure 1a: **Positive-switching logic:** Potential change-over switch to "-", installation on **24 V DC input** (A1/A2).
Figure 1b: **Negative-switching logic:** Potential change-over switch to "+", installation on **24 V UC input** (A1/A2).

Installation output

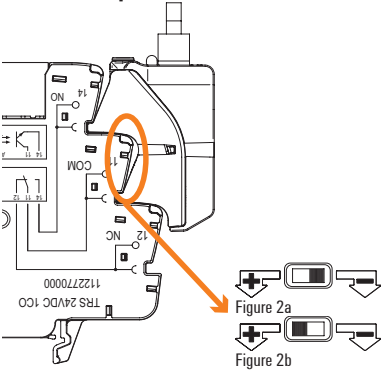


Figure 2a: **Positive-switching logic:** Potential change-over switch to "+", installation on **output** (11/14).
Figure 2b: **Negative-switching logic:** Potential change-over switch to "-", installation on **output** (11/14).


TERMSERIES adapters

- Suitable for input and output logic
- Version for 6.4mm TERMSERIES base
- User-friendly and unmistakable marking
- 15-pin D-sub connector according to DIN 41652 / IEC 60807

TIA SUBD 15S



Potential change-over switch



The potential change-over switch is located between contact rows of the TERMSERIES adaptor. It is used to switch the potential of the lower contact row to "+" or "-" potential of the supply voltage.

Installation input

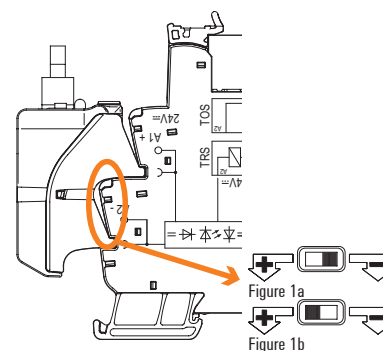


Figure 1a: **Positive-switching logic:** Potential change-over switch to "-", installation on **24 V DC input** (A1/A2).

Figure 1b: **Negative-switching logic:** Potential change-over switch to "+", installation on **24 V UC input** (A1/A2).

Installation output

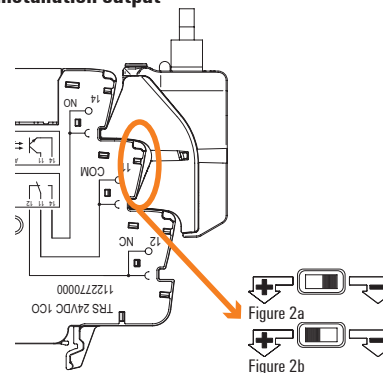


Figure 2a: **Positive-switching logic:** Potential change-over switch to "+", installation on output (11/14).

Figure 2b: **Negative-switching logic:** Potential change-over switch to "-", installation on output (11/14).

Technical data

Supply

Supply voltage

Status display

Signals

Rated voltage

Voltage, max.

Rated current (per signal path)

Current (per signal path), max.

Total current of all signals, max.

Number of signal paths

Connection data (supply)

Wire connection method

Clamping range, rated connection, min.

Clamping range, rated connection, max.

Number of terminals

Connection data (signal)

Plug type

General data

Ambient temperature (operational)

Storage temperature

Humidity

UL 94 flammability rating

Approvals

Insulation coordination

Pollution degree

Overvoltage category

Impulse withstand voltage

Rated voltage

Protection degree

24 V DC $\pm 20\%$

Green LED

24 V DC

30 V DC

125 mA

1 A

1 A

8

PUSH IN

0.13 mm²

1.5 mm²

2 (+, -)

Sub-D, 15-pole, DIN 41652 / IEC 60807

-40 °C...60 °C

-40 °C...85 °C

5...95% (indoor), T_a = 40°C, no condensation

V-0

CE; cULus; GL

2

III

1.5 kV

32 V

IP 20 in installed condition

Dimensions

Depth x width x height

mm

52 / 51 / 43

Note

Ordering data

Type	Qty.	Order No.
TIA SUBD 15S	1	1463530000

Note

Suitable for 6.4mm wide TERMSERIES base

Accessories



Note

TERMSERIES adapters

TERMSERIES adapters

- Suitable for input and output logic
- Version for 12.8mm TERMSERIES base
- Supply connections (PUSH IN) in double execution for supply voltage bridging
- User-friendly and unmistakable marking
- 10-pin connector according to DIN EN 60603-13

TIAL F10

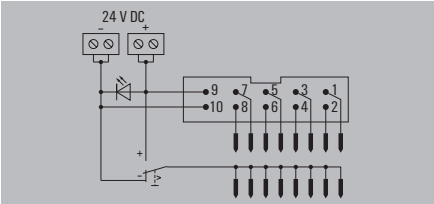

Technical data

Supply	
Supply voltage	24 V DC ± 20 %
Status display	Green LED
Signals	
Rated voltage	24 V DC
Voltage, max.	30 V DC
Rated current (per signal path)	125 mA
Current (per signal path), max.	1 A
Total current of all signals, max.	1 A
Number of signal paths	8
Connection data (supply)	
Wire connection method	PUSH IN
Clamping range, rated connection, min.	0.13 mm ²
Clamping range, rated connection, max.	1.5 mm ²
Number of terminals	4 (+, +, -, -)
Connection data (signal)	
Plug type	10-pole plug according to DIN EN 60603-13, long locking lever
General data	
Ambient temperature (operational)	-40 °C...60 °C
Storage temperature	-40 °C...85 °C
Humidity	5...95% (indoor), T _a = 40°C, no condensation
UL 94 flammability rating	V-0
Approvals	CE; cULus; GL
Insulation coordination	
Pollution degree	2
Overvoltage category	III
Impulse withstand voltage	1.5 kV
Rated voltage	32 V
Protection degree	IP 20 in installed condition

Dimensions	
Depth x width x height	mm

62 / 102 / 43

Note

Ordering data

--

Type	Qty.	Order No.
TIAL F10	1	1463540000


Note

Suitable for 12.8mm wide TERMSERIES base
--

Accessories

Note

Potential change-over switch



The potential change-over switch is located between contact rows of the TERMSERIES adaptor. It is used to switch the potential of the lower contact row to "+" or "-" potential of the supply voltage.

Installation input

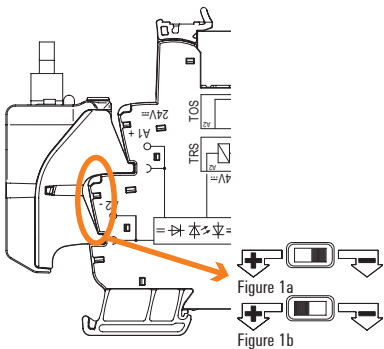


Figure 1a: **Positive-switching logic:** Potential change-over switch to "-", installation on **24 V DC input** (A1/A2).
Figure 1b: **Negative-switching logic:** Potential change-over switch to "+", installation on **24 V UC input** (A1/A2).

Installation output


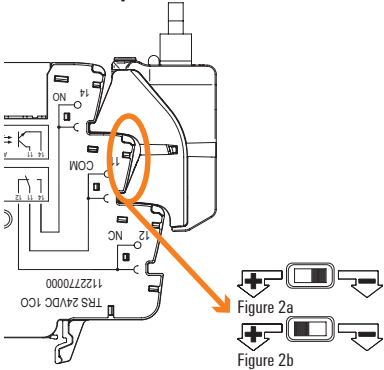


Figure 2a: **Positive-switching logic:** Potential change-over switch to "+", installation on **output** (11/14).
Figure 2b: **Negative-switching logic:** Potential change-over switch to "-", installation on **output** (11/14).


TERMSERIES adapters

- Suitable for input and output logic
- Version for 6.4mm TERMSERIES base
- Supply connections (PUSH IN) in double execution for supply voltage bridging
- User-friendly and unmistakable marking
- 20-pin connecting plug according to DIN EN 60603-13

TIAL F20

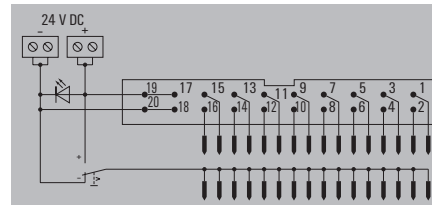

Potential change-over switch



The potential change-over switch is located between contact rows of the TERMSERIES adaptor. It is used to switch the potential of the lower contact row to "+" or "-" potential of the supply voltage.

Installation input

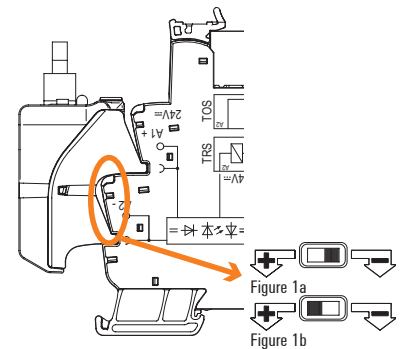


Figure 1a: **Positive-switching logic:** Potential change-over switch to "+", installation on **24 V DC input** (A1/A2).

Figure 1b: **Negative-switching logic:** Potential change-over switch to "-", installation on **24 V UC input** (A1/A2).

Installation output

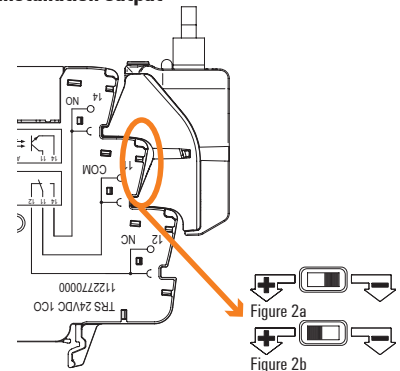


Figure 2a: **Positive-switching logic:** Potential change-over switch to "+", installation on **output** (11/14).

Figure 2b: **Negative-switching logic:** Potential change-over switch to "-", installation on **output** (11/14).

Technical data

Supply

Supply voltage
Status display

Signals

Rated voltage
Voltage, max.
Rated current (per signal path)
Current (per signal path), max.
Total current of all signals, max.
Number of signal paths

Connection data (supply)

Wire connection method
Clamping range, rated connection, min.
Clamping range, rated connection, max.
Number of terminals

Connection data (signal)

Plug type

General data

Ambient temperature (operational)
Storage temperature
Humidity
UL 94 flammability rating
Approvals

Insulation coordination

Pollution degree
Overvoltage category
Impulse withstand voltage
Rated voltage
Protection degree

24 V DC $\pm 20\%$

Green LED

24 V DC

30 V DC

60 mA

1 A

1 A

16

PUSH IN

0.13 mm²

1.5 mm²

4 (+, +, -, -)

20-pole plug according to DIN EN 60603-13, long locking lever

-40 °C...60 °C

-40 °C...85 °C

5...95% (indoor), $T_a = 40^\circ\text{C}$, no condensation

V-0

CE; cULus; GL

2

III

1.5 kV

32 V

IP 20 in installed condition

Dimensions

Depth x width x height

mm

62 / 102 / 43

Note

Ordering data

Type	Qty.	Order No.
TIAL F20	1	1463550000

Note


Suitable for 6.4mm wide TERMSERIES base

Accessories

Note

TERMSERIES

Relay modules from 6 mm width

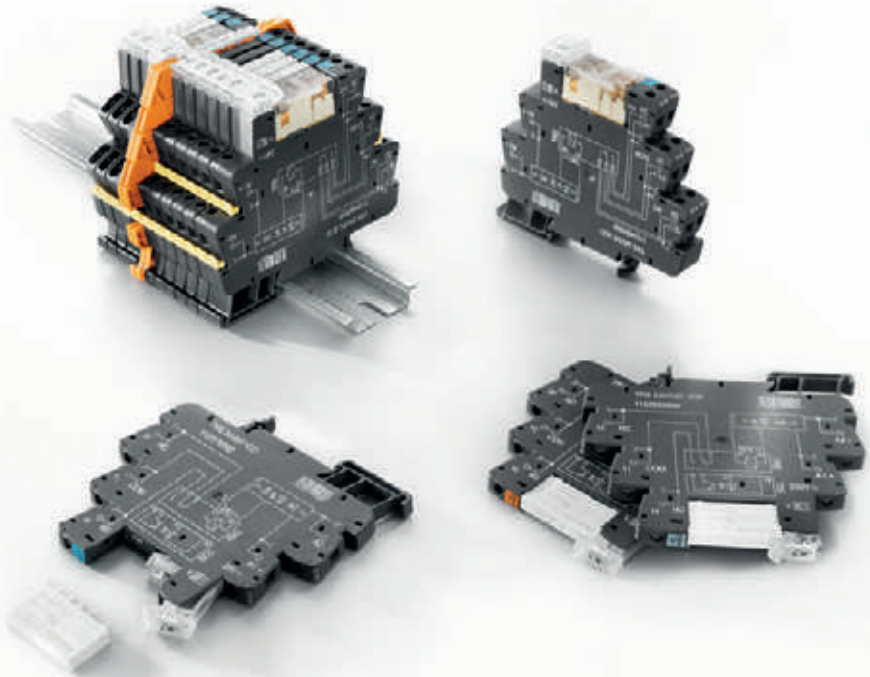

Number of contacts / Type of contact		1 NO		1 CO			2 CO	
Contact material		AgSnO	AgSnO + W	AgNi	AgNi + 5µAu	AgNi	AgNi	AgNi + 5µAu
Switching current		16 A	16 A	6 A		16 A	8 A	
Voltage / Input DC	Connection							
5 V DC	Screw			1122740000	1122980000	1479650000	1123470000	1123710000
	Tension clamp			1122860000	1123100000	1479800000	1123590000	1123830000
12 V DC	Screw			1122750000	1122990000	1479670000	1123480000	1123720000
	Tension clamp			1122870000	1123110000	1479820000	1123600000	1123840000
24 V DC	Screw	1479780000	1479810000	1122770000	1123000000	1479680000	1123490000	1123730000
	Tension clamp	1479940000	1479970000	1122880000	1123120000	1479840000	1123610000	1123850000
Input UC								
24 V UC	Screw			1122780000	1123010000	1479690000	1123500000	1123740000
	Tension clamp			1122890000	1123130000	1479850000	1123620000	1123870000
48 V UC	Screw			1122790000	1123020000	1479700000	1123510000	1123750000
	Tension clamp			1122900000	1123140000	1479870000	1123630000	1123880000
60 V UC	Screw			1122800000	1123030000	1479710000	1123520000	1123770000
	Tension clamp			1122910000	1123150000	1479880000	1123640000	1123890000
120 V UC	Screw			1122810000	1123170000	1479730000	1123530000	1123780000
	Tension clamp			1122920000	1123040000	1479890000	1123650000	1123900000
230 V UC	Screw			1122820000	1123050000	1479740000	1123540000	1123790000
	Tension clamp			1122930000	1123180000	1479900000	1123670000	1123910000
24 - 230 V UC	Screw	1479790000	1479830000	1122850000	1123090000	1479770000	1123580000	1123820000
	Tension clamp	1479950000	1479980000	1122970000	1123210000	1479930000	1123700000	1123940000
Input AC								
120 V AC RC	Screw			1122830000	1123070000	1479750000	1123550000	1123800000
	Tension clamp			1122940000	1123190000	1479910000	1123680000	1123920000
230 V AC RC	Screw			1122840000	1123080000	1479760000	1123570000	1123810000
	Tension clamp			1122950000	1123200000	1479920000	1123690000	1123930000
Note		Selection of preferred types, other modules upon request						


Pre-assembled cables for general applications

Pre-assembled cables for general applications	Introduction	F.2
	PAC-UNIV-HE - Universal pre-assembled cables for ribbon connectors according IEC 60603-13	F.3
	PAC-UNIV-D - Universal pre-assembled cables for SUB-D connectors according IEC 60807	F.4
	PAC-HD - Universal pre-assembled cables for High density SUB-D connectors	F.6
	PAC-ELCO Pre-assembled cables for RS ELCO interfaces	F.8
	Selection guide – PLC Universal pre-assembled cables	F.9

Pre-assembled cables for general applications

Pre-assembled cables with the corresponding plug-in connector systems are used in the connection between the controller and the interface. These pre-assembled cables allow maximum savings for the user, as they achieve a cost reduction in the materials, due to fewer individual cables, conductors and cable ducting.

PAC-UNIV Pre-assembled cables for RS F and RS SD interfaces

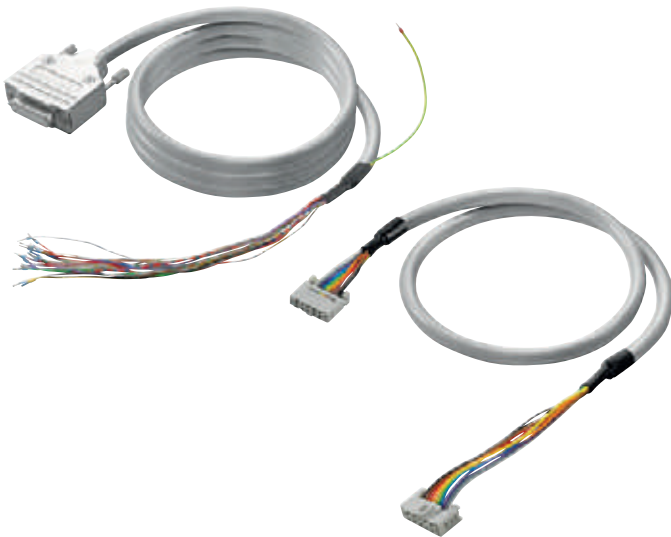

This range of pre-assembled cables for ribbon cabling complies with IEC 60603-13/DIN41651 SUB-D in accordance with IEC 60807-2/DIN41652 and Sub-D High density.

One end of the cable is prepared for connecting with the RS-F or RS SD interfaces and the other end for wire-end ferrules or to a SUB-D connector or ribbon cable.


Colour code acc. To DIN 47,100 and available in different lengths.

PAC-ELCO Pre-assembled cables for RS ELCO interfaces



With pre-assembled cables for ELCO connectors, one end of the cable is prepared for connecting with the RS-ELCO interfaces. The other end is connected to a wire-end ferrule or to a female ELCO connector. Colour code acc. To DIN 47,100 and available in different lengths.

PAC-UNIV Pre-assembled cables with PLC original connector

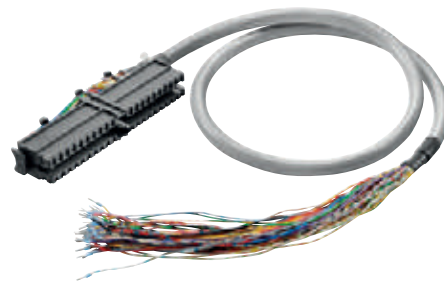

These range of pre-assembled cables are provided with the original PLC connector in one end of the cables and with ferrules in the other.

Colour code acc. To DIN 47,100 and available in different lengths.

Available for main PLC's of the market. More options on demand.

PAC-UNIV-HE – Universal pre-assembled cables for ribbon connectors according IEC 60603-13

Pre-assembled ribbon cable according to IEC-60603-13/
DIN 41651.

- Ribbon cable - ribbon cable
 - Ribbon cable - wire-end ferrules
- Cable
- Halogen free cables: LHH
 - No halogen-free cables: LIYY
 - Colour code according DIN 47100

Technical data

Rated data
Operating voltage
Permissible current strength per path, max.
Total current, max.
Resistance
Capacity wire / wires
Capacity wire / shield
Nominal rating, control cable
Wire cross-section
General data
Ambient temperature (operational)
Storage temperature

PAC-UNIV-HE-F / PAC-HE-F-HF

Ribbon cable to wire-end ferrules connector



$\leq 60 \text{ V DC} \leq 25 \text{ V AC}$
1.00 A
3.00 A
$\leq 150 \text{ m}\Omega/\text{m}$
300 pF/m
300 pF/m
0.14 mm ²
-10...50 °C
-10...60 °C

PAC-UNIV-HE-HE / PAC-HE-HE-HF

Ribbon cable to ribbon cable connector



$\leq 60 \text{ V DC} \leq 25 \text{ V AC}$
1.00 A
3.00 A
$\leq 150 \text{ m}\Omega/\text{m}$
300 pF/m
300 pF/m
0.14 mm ²
-10...50 °C
-10...60 °C

Note

Ordering data

No halogen free cables	
10-pole connector	
14-pole connector	
16-pole connector	
20-pole connector	
26-pole connector	
34-pole connector	
40-pole connector	
50-pole connector	
Halogen free cables	
10-pole connector	
14-pole connector	
16-pole connector	
20-pole connector	
26-pole connector	
34-pole connector	
40-pole connector	
50-pole connector	

Type	Qty.	Order No.
PAC-UNIV-HE10-F-1M	1	1349730010
PAC-UNIV-HE14-F-1M	1	1349740010
PAC-UNIV-HE16-F-1M	1	1349770010
PAC-UNIV-HE20-F-1M	1	1349790010
PAC-UNIV-HE26-F-1M	1	1349820010
PAC-UNIV-HE34-F-1M	1	1349840010
PAC-UNIV-HE40-F-1M	1	1349880010
PAC-HE10-F-HF-1M	1	2420540010
PAC-HE14-F-HF-1M	1	2425650010
PAC-HE16-F-HF-1M	1	2425710010
PAC-HE20-F-HF-1M	1	2425660010
PAC-HE26-F-HF-1M	1	2425720010
PAC-HE34-F-HF-1M	1	2425690010
PAC-HE40-F-HF-1M	1	2425680010

Type	Qty.	Order No.
PAC-UNIV-HE10-HE10-1M	1	1349630010
PAC-UNIV-HE14-HE14-1M	1	1349640010
PAC-UNIV-HE16-HE16-1M	1	1349650010
PAC-UNIV-HE20-HE20-1M	1	1349670010
PAC-UNIV-HE26-HE26-1M	1	1349680010
PAC-UNIV-HE34-HE34-1M	1	1349690010
PAC-UNIV-HE40-HE40-1M	1	1349700010
PAC-UNIV-HE50-HE50-1M	1	1349720010
PAC-HE10-HE10-HF-1M	1	2420550010
PAC-HE14-HE14-HF-1M	1	2425940010
PAC-HE16-HE16-HF-1M	1	2425700010
PAC-HE20-HE20-HF-1M	1	2425730010
PAC-HE26-HE26-HF-1M	1	2425740010
PAC-HE34-HE34-HF-1M	1	2425950010
PAC-HE40-HE40-HF-LLLM	1	2425960010
PAC-HE50-HE50-HF-1M	1	2425970010

Note

The last 3 digits of the cable code indicate its length. For example, if the code ends in 100, the cable would be 10 m long.

The last 3 digits of the cable code indicate its length. For example, if the code ends in 100, the cable would be 10 m long.

PAC-UNIV-D – Universal pre-assembled cables for SUB-D connectors according IEC 60807

PAC-UNIV-D – Universal pre-assembled cables
for SUB-D connectors according IEC 60807

Pre-assembled SUB-D cable according to IEC-60807/DIN 41652.

- SUB-D to SUB-D connector
- SUB-D to wire-end ferrules
- Shielded cable

Cable

- Halogen free cables: LIHCH
- No halogen-free cables: LIYcY
- Colour code according DIN 47100

Technical data

Rated data
Operating voltage
Permissible current strength per path, max.
Total current, max.
Resistance
Capacity wire / wires
Capacity wire / shield
Nominal rating, control cable
Wire cross-section
General data
Ambient temperature (operational)
Storage temperature

PAC-UNIV-D-F/ PAC-D-F-HF

SUB-D to wire-end ferrules



$\leq 60 \text{ V DC} \leq 25 \text{ V AC}$
1.00 A
3.00 A
$\leq 80 \text{ m}\Omega/\text{m}$
300 pF/m
300 pF/m
0.25 mm ²
-10...50°C
-10...60 °C

PAC-UNIV-D-D /PAC-D-D-HF

SUB-D male to male or SUB-D female to female connector



$\leq 60 \text{ V DC} \leq 25 \text{ V AC}$
1.00 A
3.00 A
$\leq 80 \text{ m}\Omega/\text{m}$
300 pF/m
300 pF/m
0.25 mm ²
-10...50°C
-10...60 °C

Note

Ordering data

No halogen free cables	
9-pole male connector	
15-pole male connector	
25-pole male connector	
37-pole male connector	
50-pole male connector	
9-pole female connector	
15-pole female connector	
25-pole female connector	
37-pole female connector	
50-pole female connector	
Halogen free cables	
9-pole male connector	
15-pole male connector	
25-pole male connector	
37-pole male connector	
50-pole male connector	
9-pole female connector	
15-pole female connector	
25-pole female connector	
37-pole female connector	
50-pole female connector	
Note	

Type	Qty.	Order No.
PAC-UNIV-D9M-F-1M	1	1350400010
PAC-UNIV-D15M-F-1M	1	1350420010
PAC-UNIV-D25M-F-1M	1	1350430010
PAC-UNIV-D37M-F-1M	1	1350440010
PAC-UNIV-D50M-F-1M	1	1350450010
PAC-UNIV-D9F-F-1M	1	1350470010
PAC-UNIV-D15F-F-1M	1	1350480010
PAC-UNIV-D25F-F-1M	1	1350490010
PAC-UNIV-D37F-F-1M	1	1350500010
PAC-UNIV-D50F-F-1M	1	1350520010
PAC-D9M-F-HF-1M	1	2420560010
PAC-D15M-F-HF-1M	1	2425980010
PAC-D25M-F-HF-1M	1	2425990010
PAC-D37M-F-HF-1M	1	2426000010
PAC-D9F-F-HF-1M	1	2426020010
PAC-D15F-F-HF-1M	1	2426030010
PAC-D25F-F-HF-1M	1	2426040010
PAC-D37F-F-HF-1M	1	2426050010
The last 3 digits of the cable code indicate its length. For example, if the code ends in 100, the cable would be 10 m long.		

Type	Qty.	Order No.
PAC-UNIV-D9M-D9M-1M	1	1349750010
PAC-UNIV-D15M-D15M-1M	1	1349780010
PAC-UNIV-D25M-D25M-1M	1	1349800010
PAC-UNIV-D37M-D37M-1M	1	1349830010
PAC-UNIV-D50M-D50M-1M	1	1349850010
PAC-UNIV-D9F-D9F-1M	1	1349870010
PAC-UNIV-D15F-D15F-1M	1	1349890010
PAC-UNIV-D25F-D25F-1M	1	1349920010
PAC-UNIV-D37F-D37F-1M	1	1349930010
PAC-UNIV-D50F-D50F-1M	1	1349940010
PAC-D9M-D9M-HF-1M	1	2420570010
PAC-D15M-D15M-HF-1M	1	2426070010
PAC-D25M-D25M-HF-1M	1	2426080010
PAC-D37M-D37M-HF-1M	1	2426090010
PAC-D50M-D50M-HF-1M	1	2426100010
PAC-D9F-D9F-HF-1M	1	2426110010
PAC-D15F-D15F-HF-1M	1	2426180010
PAC-D25F-D25F-HF-1M	1	2426120010
PAC-D37F-D37F-HF-1M	1	2426130010
PAC-D50F-D50F-HF-1M	1	2426140010
The last 3 digits of the cable code indicate its length. For example, if the code ends in 100, the cable would be 10 m long.		

PAC-UNIV-D – Universal pre-assembled cables
for SUB-D connectors according IEC 60807

Pre-assembled SUB-D cable according to IEC-60807/DIN 41652.

- SUB-D to SUB-D connector
- SUB-D to wire-end ferrules
- Shielded cable

Cable

- Halogen free cables: LIHCH
- No halogen-free cables: LIYcY
- Colour code according DIN 47100

Technical data

Rated data	
Operating voltage	≤ 60 V DC ≤ 25 V AC
Permissible current strength per path, max.	1.00 A
Total current, max.	3.00 A
Resistance	≤ 80 mΩ/m
Capacity wire / wires	300 pF/m
Capacity wire / shield	300 pF/m
Nominal rating, control cable	
Wire cross-section	0.25 mm²
General data	
Ambient temperature (operational)	-10...50°C
Storage temperature	-10...60 °C

PAC-UNIV-DxM-DxF/PAC-DxM-DxF-HF

SUB-D male-female connector



Note

Ordering data

No halogen free cables		Type	Qty.	Order No.
	9-pole male-female connector	PAC-UNIV-D9M-D9F-1M	1	1349950010
	15-pole male-female connector	PAC-UNIV-D15M-D15F-1M	1	1349970010
	25-pole male-female connector	PAC-UNIV-D25M-D25F-1M	1	1349980010
	37-pole male-female connector	PAC-UNIV-D37M-D37F-1M	1	1349990010
	50-pole male-female connector	PAC-UNIV-D50M-D50F-1M	1	1350000010
Halogen free cables				
	9-pole male-female connector	PAC-D9M-D9F-HF-1M	1	2420580010
	15-pole male-female connector	PAC-D15M-D15F-HF-1M	1	2426150010
	25-pole male-female connector	PAC-D25M-D25F-HF-1M	1	2426160010
	37-pole male-female connector	PAC-D37M-D37F-HF-1M	1	2426190010
	50-pole male-female connector	PAC-D50M-D50F-HF-1M	1	2426170010

Note

The last 3 digits of the cable code indicate its length. For example, if the code ends in 100, the cable would be 10 m long.

PAC-HD – Universal pre-assembled cables for High density SUB-D connectors

PAC-HD – Universal pre-assembled cables for High density SUB-D connectors

Pre-assembled high density SUB-D cable

- HD SUB-D to HD SUB-D connector
- HD SUB-D to wire-end ferrules

Shielded cable LiYcY:

- 15-26 poles: 0.25 mm² (Resistance ≤ 80 mΩ/m)
- 44-32 poles: 0.14 mm² (Resistance ≤ 150 mΩ/m)
- Colour code according DIN 47100

Technical data

Rated data
Operating voltage
Permissible current strength per path, max.
Total current, max.
Capacity wire / wires
Capacity wire / shield
Nominal rating, control cable
Cable
Material
General data
Ambient temperature (operational)
Storage temperature

PAC-HD-F

HD SUB-D to wire-end ferrules



≤ 250 V DC ≤ 250 V AC
1.00 A
3.00 A
300 pF/m
300 pF/m
Cable LiYcY
PVC
-10...50°C
-10...60 °C

PAC-HD-HD

HD SUB-D male to male or HD SUB-D female to female connector



≤ 60 V DC ≤ 25 V AC
1.00 A
3.00 A
300 pF/m
300 pF/m
Cable LiYcY
PVC
-10...50°C
-10...60 °C

Note

Ordering data

15-pole male connector
26-pole male connector
44-pole male connector
62-pole male connector
15-pole female connector
26-pole female connector
44-pole female connector
62-pole female connector

Type	Qty.	Order No.
PAC-HD15M-F-V0-1M	1	1440810010
PAC-HD26M-F-V0-1M	1	2093680010
PAC-HD44M-F-V0-1M	1	2093910010
PAC-HD15F-F-V0-1M	1	1440780010
PAC-HD26F-F-V0-1M	1	2093080010
PAC-HD44F-F-V0-1M	1	2093090010

Type	Qty.	Order No.
PAC-HD15M-HD15M-V0-1M	1	1440740010
PAC-HD26M-HD26M-V0-1M	1	2094720010
PAC-HD44M-HD44M-V0-1M	1	2094730010
PAC-HD62M-HD62M-V0-1M	1	2094770010
PAC-HD15F-HD15F-V0-1M	1	1440750010
PAC-HD26F-HD26F-V0-1M	1	2094140010
PAC-HD44F-HD44F-V0-1M	1	2094180010
PAC-HD62F-HD62F-V0-1M	1	1988930010

Note

The last 3 digits of the cable code indicate its length. For example, if the code ends in 100, the cable would be 10 m long.

The last 3 digits of the cable code indicate its length. For example, if the code ends in 100, the cable would be 10 m long.

PAC-HD – Universal pre-assembled cables for High density SUB-D connectors

Pre-assembled high density SUB-D cable

- HD SUB-D to HD SUB-D connector
- HD SUB-D to wire-end ferrules

Shielded cable LiYcY:

- 15-26 poles: 0.25 mm² (Resistance ≤ 80 mΩ/m)
- 44-32 poles: 0.14 mm² (Resistance ≤ 150 mΩ/m)
- Colour code according DIN 47100

PAC-HDxM-HDxF

HD SUB-D male-female connector



Technical data

Rated data	
Operating voltage	≤ 60 V DC ≤ 25 V AC
Permissible current strength per path, max.	1.00 A
Total current, max.	3.00 A
Capacity wire / wires	300 pF/m
Capacity wire / shield	300 pF/m
Nominal rating, control cable	
Cable	Cable LiYcY
Material	PVC
General data	
Ambient temperature (operational)	-10...50°C
Storage temperature	-10...60 °C

Note

Ordering data

	Type	Qty.	Order No.
15-pole male-female connector	PAC-HD15M-HD15F-V0-1M	1	1440770010
26-pole male-female connector	PAC-HD26M-HD26F-V0-1M	1	2003420010
44-pole male-female connector	PAC-HD44M-HD44F-V0-1M	1	1989360010
62-pole male-female connector	PAC-HD62M-HD62F-V0-1M	1	2094800010

Note

The last 3 digits of the cable code indicate its length. For example, if the code ends in 100, the cable would be 10 m long.

PAC-ELCO – Pre-assembled cables for RS ELCO interfaces

PAC-ELCO Pre-assembled cables
for RS ELCO interfaces

- Pre-assembled ELCO female cable
- ELCO to ELCO connector
 - ELCO to wire-end ferrules
- Shielded cable LiYcY

PAC-ELCO



Technical data

Rated data	
Operating voltage	250 V
Permissible current strength per path, max.	1.00 A
Total current, max.	3.00 A
Resistance	≤ 80 mΩ/m
Capacity wire / wires	300 pF/m
Capacity wire / shield	300 pF/m
Cable features	
Cable	Cable LiYcY
Material	PVC
Wire cross-section	0.25 mm²
General data	
Ambient temperature (operational)	-10...50°C
Storage temperature	-10...60 °C

Note


Ordering data

	Type	Qty.	Order No.
20-pole socket / 20-pole socket	PAC-ELCO20-F20-F20-1M	1	7789760010
20-pole socket / Ferrules	PAC-ELCO20-F20-F-1M	1	7789761010
38-pole socket / 38-pole socket	PAC-ELCO38-F38-F38-1M	1	7789762010
38-pole socket / Ferrules	PAC-ELCO38-F38-F-1M	1	7789763010
56-pole socket / 56-pole socket (32-pole connected only)	PAC-ELCO56-F32-F32-1M	1	7789773010
56-pole socket / Ferrules (32-pole connected only)	PAC-ELCO56-F32-F-1M	1	7789774010
56-pole socket / 56-pole socket (54-pole connected only)	PAC-ELCO56-F54-F54-1M	1	7789775010
56-pole socket / Ferrules (54-pole connected only)	PAC-ELCO56-F54-F-1M	1	7789776010
56-pole socket / 56-pole socket	PAC-ELCO56-F56-F56-1M	1	7789764010
56-pole socket / Ferrules	PAC-ELCO 56-F56-F-1M	1	7789765010

Note

The last 3 digits of the cable code indicate its length. For example, if the code ends in 100, the cable would be 10 m long.

PLC Universal pre-assembled cables

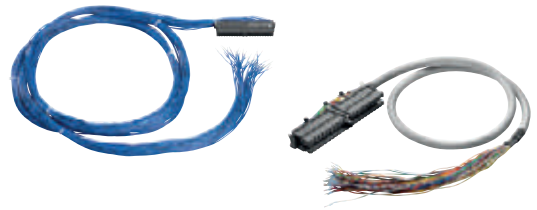

Cables	PLC Connector	Cable type	To use with
Universal cables for Siemens S7-300			
7789606xxx	Siemens S7-300 20 poles	Unshielded LIYY 0,25 mm ²	Siemens S7-300 digital cards with Siemens 20 poles connector
1323930xxx	Siemens S7-300 20 poles	Unshielded 0,5 mm ²	Siemens S7-300 digital cards with Siemens 20 poles connector
7789607xxx	Siemens S7-300 20 poles	Shielded LYCY 0,25 mm ²	Siemens S7-300 analog cards with Siemens 20 poles connector
7789608xxx	Siemens S7-300 40 poles	Unshielded LIYY 0,25 mm ²	Siemens S7-300 digital cards with Siemens 40 poles connector
1323960xxx	Siemens S7-300 40 poles	Unshielded 0,5 mm ²	Siemens S7-300 digital cards with Siemens 40 poles connector
7789609xxx	Siemens S7-300 40 poles	Shielded LYCY 0,25 mm ²	Siemens S7-300 analog cards with Siemens 40 poles connector
1452610xxx	40 poles connector	Unshielded LIYY 0,25 mm ²	Siemens S7-300 digital cards with 40 poles connector
Universal cables for Siemens S7-400			
1504000xxx	Siemens S7-400 48 poles	Unshielded LIYY 0,25 mm ²	Siemens S7-400 digital cards with Siemens 48 poles connector
1504020xxx	Siemens S7-400 48 poles	Shielded LYCY 0,25 mm ²	Siemens S7-400 analog cards with Siemens 48 poles connector
Universal cables for Siemens S7-1500			
1466230xxx	Siemens S7-1500 35mm 40 poles	Unshielded LIYY 0,25 mm ²	Siemens S7-1500 digital cards with 35 mm Siemens 40 poles connector
1466240xxx	Siemens S7-1500 35mm 40 poles	Shielded LYCY 0,25 mm ²	Siemens S7-1500 analog cards with 35 mm Siemens 40 poles connector
2000150xxx	Siemens S7-1500 35mm 40 poles	Unshielded 0,5 mm ²	Siemens S7-1500 digital cards with 35 mm Siemens 40 poles connector
Universal cables for Rockwell Control Logix			
7789731xxx	Rockwell 1756-TBNH 20 poles	Unshielded LIYY 0,25 mm ²	Rockwell Control Logix digital cards with Rockwell 20 poles connector
7789732xxx	Rockwell 1756-TBNH 20 poles	Shielded LYCY 0,25 mm ²	Rockwell Control Logix analog cards with Rockwell 20 poles connector
7789733xxx	Rockwell 1756-TBCH 36 poles	Unshielded LIYY 0,25 mm ²	Rockwell Control Logix digital cards with Rockwell 36 poles connector
7789734xxx	Rockwell 1756-TBCH 36 poles	Shielded LYCY 0,25 mm ²	Rockwell Control Logix analog cards with Rockwell 36 poles connector
Universal cables for Rockwell Compact Logix			
1350250xxx	Rockwell 1769-RTBN18 18 poles	Unshielded LIYY 0,25 mm ²	Rockwell Compact Logix digital cards with Rockwell 18 poles connector
1350270xxx	Rockwell 1769-RTBN18 18 poles	Shielded LYCY 0,25 mm ²	Rockwell Compact Logix analog cards with Rockwell 18 poles connector
1349880xxx	IDC connector 40 poles	Unshielded LIYY 0,25 mm ²	Rockwell Compact Logix cards with DIN 41651 type 40 poles connector
Universal cables for Schneider Premium			
7789827xxx	Schneider TSX BLY 01 20 poles	Unshielded LIYY 0,25 mm ²	Schneider Premium digital cards with Schneider 20 poles connector
2426770xxx	Schneider TSX BLY 01 20 poles	Shielded LYCY 0,25 mm ²	Schneider Premium analog cards with Schneider 20 poles connector
1349790xxx	IDC connector 20 poles	Unshielded LIYY 0,25 mm ²	Schneider Premium cards with DIN 41651 type 20 poles connector
1350430xxx	SUBD male connector 25 poles	Shielded LYCY 0,25 mm ²	Schneider Premium cards with SUBD female 25 poles connector
Universal cables for Schneider M340			
1355950xxx	Schneider BMX FTB 2000 20 poles	Unshielded LIYY 0,25 mm ²	Schneider M340 digital cards with Schneider 20 poles connector
2426750xxx	Schneider BMX FTB 2000 20 poles	Shielded LYCY 0,25 mm ²	Schneider M340 analog cards with Schneider 20 poles connector
2426760xxx	Schneider BMX FTB 2820 28 poles	Shielded LYCY 0,25 mm ²	Schneider M340 analog cards with Schneider 28 poles connector
1452610xxx	40 poles connector	Unshielded LIYY 0,25 mm ²	Schneider M340 digital cards with 40 poles connector
Universal cables for Mitsubishi Melsec Q			
1452610xxx	40 poles connector	Unshielded LIYY 0,25 mm ²	Mitsubishi Melsec Q digital cards with 40 poles connector
Universal cables for Omron CJ1W			
2426780xxx	Omron CJ-OD507-18P 18 poles	Unshielded LIYY 0,25 mm ²	Omron CJ1W digital cards with Omron 18 poles connector
2426790xxx	Omron CJ-OD507-18P 18 poles	Shielded LYCY 0,25 mm ²	Omron CJ1W analog cards with Omron 18 poles connector
1452610xxx	40 poles connector	Unshielded LIYY 0,25 mm ²	Omron CJ1W digital cards with 40 poles connector
Universal cables for Gefanuc 90-30 and RX3i			
1378040xxx	Gefanuc IC693ACC311 20 poles	Unshielded LIYY 0,25 mm ²	Gefanuc 90-30 and RX3i digital cards with Gefanuc 20 poles connector
2435760xxx	Gefanuc IC693ACC311 20 poles	Shielded LYCY 0,25 mm ²	Gefanuc 90-30 and RX3i analog cards with Gefanuc 20 poles connector
2435770xxx	20 poles connector	Unshielded LIYY 0,25 mm ²	Gefanuc 90-30 and RX3i digital cards with 20 poles connector
7789842xxx	Gefanuc IC694TBS032 36 poles	Unshielded LIYY 0,25 mm ²	RX3i digital cards with Gefanuc 38 poles connector
2435780xxx	Gefanuc IC694TBS032 36 poles	Shielded LYCY 0,25 mm ²	RX3i analog cards with Gefanuc 38 poles connector
Universal cables for Weidmüller u-remote			
1405070xxx	20 poles connector with housing	Unshielded LIYY 0,25 mm ²	Weidmüller U-Remote cards with DIN 41651 type 20 poles connector

Migration Systems

Migration Systems	Introduction	G.2
	Migration from Siemens S5-115	G.4
	Migration from Siemens S5-135	G.8
	Migration from Schneider TSX	G.12
	FAD – front adapters for migrations from Siemens S5-115	G.16
	FAD – front adapters for migrations from Siemens S5-135	G.20
	FAD – front adapters for migrations from Schneider TSX	G.23
	MIGRATION RACK – Migration accessories	G.28
	RS F20 X – Redundancy interfaces	G.30

Replace PLC systems without any downtimes

Our PLC migration interface affords maximum flexibility

When industrial systems age or are no longer state-of-the-art, or when there is a limited supply of support and/or spare parts, systems need to be updated at a process industry plant's control level.

When replacing PLC systems, it is vital to avoid cabling errors and to keep plant downtimes to a minimum during the migration process.

PLC migration interfaces from Weidmüller provide you with a secure way of replacing the control level. Even adaptations or changes to the infrastructure can be performed simply and quickly without any need to intervene in the field cabling.



In many fields, such as the process, chemical, cement or automotive industry, and in the energy sector, plant operators need to perform PLC system updates without any downtimes. In situations such as these ones, PLC migration interfaces from Weidmüller are the perfect solution

Your special advantages:

Reach your goal faster

With Weidmüller PLC migration interfaces, there's no need to make any changes to the field cabling, so this shortens the amount of time needed to upgrade the entire plant. Indeed, what used to be a PLC migration process that lasted a good few weeks is now an update that can be completed in just a few hours – including the system tests. Production facilities can return to operating as normal even after the briefest of downtimes.

Use independent of the manufacturer

Irrespective of the PLC manufacturer, at Weidmüller you'll find the perfect portfolio of migration components to suit your purpose.



Error-free migration

Easy-to choose migration components and the possibility of combining tested, pre-assembled cables and front plug-in adapters make for error-free connection of the new PLC.



Make choices specific to your application

Simple configuration tables from Weidmüller make it easier for you to choose all the elements you need. The lists are based on the ratio of old to new PLC cards and precisely describe the rack system, the front adapters and the pre-assembled cables.

New system: Weidmüller u-remote

Old system	Migration scenario	Cable type	Number of signals	Cable No.	Cable length	Front adapter	Cable kit	Notes
Siemens S7-1500	Siemens S7-1500 to Weidmüller u-remote	Signal	24	100000000	100000000	100000000	100000000	
Siemens S7-1500	Siemens S7-1500 to Weidmüller u-remote	Signal	24	100000000	100000000	100000000	100000000	
Siemens S7-1500	Siemens S7-1500 to Weidmüller u-remote	Signal	24	100000000	100000000	100000000	100000000	
Siemens S7-1500	Siemens S7-1500 to Weidmüller u-remote	Signal	24	100000000	100000000	100000000	100000000	
Siemens S7-1500	Siemens S7-1500 to Weidmüller u-remote	Signal	24	100000000	100000000	100000000	100000000	

New system: Siemens S7-1500

Old system	Migration scenario	Cable type	Number of signals	Cable No.	Cable length	Front adapter	Cable kit	Notes
Siemens S7-1500	Siemens S7-1500 to Siemens S7-1500	Signal	24	100000000	100000000	100000000	100000000	
Siemens S7-1500	Siemens S7-1500 to Siemens S7-1500	Signal	24	100000000	100000000	100000000	100000000	
Siemens S7-1500	Siemens S7-1500 to Siemens S7-1500	Signal	24	100000000	100000000	100000000	100000000	
Siemens S7-1500	Siemens S7-1500 to Siemens S7-1500	Signal	24	100000000	100000000	100000000	100000000	
Siemens S7-1500	Siemens S7-1500 to Siemens S7-1500	Signal	24	100000000	100000000	100000000	100000000	

Less space required

With our new migration interfaces, PLC migration doesn't automatically translate into you suddenly having less free space in your cabinet. The rack system replaces the old control and combines connection levels and the new control to create one compact unit. Due to the possibility of easily turning down the upper deck the connection components are accessible without any difficulty.



Needs-based solution

Our adapters and interfaces are the easiest way of combining old plants with new PLC systems. There are no limits to the potential uses of our retrofitting components.



Selection Table for migration between SIEMENS S5-115 to Weidmüller u-remote/ SIEMENS S7-1500 and S7-300 / Schneider Premium

The following selection tables help you to choose the FAD and pre-assembled cables to migrate from S5-115 to other systems.

1. Select the right table, depending on the new systems you need to migrate
2. Select the combination of "old Card" / "new card" you need to migrate from the corresponding table. For example: 6ES5 420-7LA11 to 1315210000
UR20-16DI-P-PLC-INT
3. Select the order number of the FAD to be ordered:
 - FAD code 1991730000
 - Quantity: 1 unit (by card)
4. Generate the order number of the cable to be ordered:
 - Cable code 1349670xxx
 - Quantity: 2 unit (by card)

The last 3 digits indicate the length:
For example 015 indicates 1.5 m

Please always take into account the characteristics of the new PLC card so that it is able to provide enough current to your existing application to act the field elements.

New system: Weidmüller u-remote

Siemens S5-115 Old Card	Weidmüller u-remote New Card	Card type	Number of signals	FAD			CABLES		
				Order No.	Type	Qty.	Order No.	Type	Qty.
6ES5 420-7LA11	1315210000 UR20-16DI-P-PLC-INT (2 uds)	Digital Input	32	1991730000 ^{A)}	FAD S5115 2XHE20 32IO M	1	1349670xxx	PAC-UNIV-HE20-HE20-LLLM	2
6ES5 430-7LA12	1315210000 UR20-16DI-P-PLC-INT (2 uds)	Digital Input	32	1991730000 ^{A)}	FAD S5115 2XHE20 32IO M	1	1349670xxx	PAC-UNIV-HE20-HE20-LLLM	2
6ES5 441-7LA12	1315270000 UR20-16DO-P-PLC-INT (2 uds)	Digital Output	32	1991730000 ^{A)}	FAD S5115 2XHE20 32IO M	1	1349670xxx	PAC-UNIV-HE20-HE20-LLLM	2
6ES5 451-7LA11	1315270000 UR20-16DO-P-PLC-INT (2 uds)	Digital Output	32	1991730000 ^{A)}	FAD S5115 2XHE20 32IO M	1	1349670xxx	PAC-UNIV-HE20-HE20-LLLM	2
6ES5 451-7LA12	1315270000 UR20-16DO-P-PLC-INT (2 uds)	Digital Output	32	1991730000 ^{A)}	FAD S5115 2XHE20 32IO M	1	1349670xxx	PAC-UNIV-HE20-HE20-LLLM	2
6ES5 451-7LA21	1315270000 UR20-16DO-P-PLC-INT (2 uds)	Digital Output	32	1991730000 ^{A)}	FAD S5115 2XHE20 32IO M	1	1349670xxx	PAC-UNIV-HE20-HE20-LLLM	2
6ES5 454-7LA12	1315270000 UR20-16DO-P-PLC-INT	Digital Output	16	1986010000 ^{A)}	FAD S5115 HE20 16IO M	1	1349670xxx	PAC-UNIV-HE20-HE20-LLLM	1
Note: A) FAD designed to work with only one power supply. Please contact us for information on other solution. B) Cable designed to work with only power supply. Please contact us for information on other solution.									

New system: Siemens S7-1500

Siemens S5-115 Old Card	Siemens S7-1500 New Card	Card type	Number of signals	FAD			CABLES		
				Order No.	Type	Qty.	Order No.	Type	Qty.
6ES5 420-7LA11	6ES7521-1BL00-QAB0	Digital Input	32	1991730000 ^{A)}	FAD S5115 2XHE20 32IO M	1	1462040xxx	PAC-S1500-HE20-V0-LLLM	1
6ES5 430-7LA12	6ES7521-1BL00-QAB0	Digital Input	32	1991730000 ^{A)}	FAD S5115 2XHE20 32IO M	1	1462040xxx	PAC-S1500-HE20-V0-LLLM	1
6ES5 431-7LA11	6ES7521-1BH00-QAB0 (only 24 V DC)	Digital Input	16	1986010000 ^{A)}	FAD S5115 HE20 16IO M	1	1462090xxx	PAC-S1500-HE20-V1-LLLM	1
6ES5 435-7LA11	6ES7521-1FH00-QAA0	Digital Input	16	1985980000	FAD S5115 SL24 M	1	2004530xxx	PAC-S1500-SL24-AR1-LLLM	1
6ES5 436-7LA11	6ES7521-1FH00-QAA0	Digital Input	16	1985980000	FAD S5115 SL24 M	1	2004530xxx	PAC-S1500-SL24-AR1-LLLM	1
6ES5 441-7LA12	6ES7522-1BL00-QAB0	Digital Output	32	1991730000 ^{A)}	FAD S5115 2XHE20 32IO M	1	1462040xxx	PAC-S1500-HE20-V0-LLLM	1
6ES5 451-7LA11	6ES7522-1BL00-QAB0	Digital Output	32	1991730000 ^{A)}	FAD S5115 2XHE20 32IO M	1	1462040xxx	PAC-S1500-HE20-V0-LLLM	1
6ES5 451-7LA12	6ES7522-1BL00-QAB0	Digital Output	32	1991730000 ^{A)}	FAD S5115 2XHE20 32IO M	1	1462040xxx	PAC-S1500-HE20-V0-LLLM	1
6ES5 451-7LA21	6ES7522-1BL00-QAB0	Digital Output	32	1991730000 ^{A)}	FAD S5115 2XHE20 32IO M	1	1462040xxx	PAC-S1500-HE20-V0-LLLM	1
6ES5 454-7LA12	6ES7522-1BH00-QAB0	Digital Output	16	1986010000 ^{A)}	FAD S5115 HE20 16IO M	1	1462090xxx	PAC-S1500-HE20-V1-LLLM	1
6ES5 458-7LC11	6ES7522-5HF00-QAB0 (2 units)	Digital Output	16	1985980000	FAD S5115 SL24 M	1	2004540xxx ^{B)}	PAC-S1500-SL24-AY0-LLLM	1
Note: A) FAD designed to work with only one power supply. Please contact us for information on other solution. B) Cable designed to work with only power supply. Please contact us for information on other solution.									

New system: Siemens S7-300

Siemens S5-115 Old Card	Siemens S7-300 New Card	Card type	Number of signals	FAD			CABLES		
				Order No.	Type	Qty.	Order No.	Type	Qty.
6ES5 420-7LA11	6ES7321-1BL00-QAA0	Digital Input	32	1991730000 ^{A)}	FAD S5115 2XHE20 32IO M	1	7789236xxx	PAC-S300-HE20-V4-LLLM	1
6ES5 430-7LA12	6ES7321-1BL00-QAA0	Digital Input	32	1991730000 ^{A)}	FAD S5115 2XHE20 32IO M	1	7789236xxx	PAC-S300-HE20-V4-LLLM	1
6ES5 435-7LA11	6ES7321-1FH00-QAA0	Digital Input	16	1985980000	FAD S5115 SL24 M	1	2004620xxx	PAC-S300-SL24-AR0-LLLM	1
6ES5 435-7LC11	6ES7321-1FF10-QAA0	Digital Input	8	1985980000	FAD S5115 SL24 M	1	2004630xxx	PAC-S300-SL24-AR1-LLLM	1
6ES5 436-7LA11	6ES7321-1FH00-QAA0	Digital Input	16	1985980000	FAD S5115 SL24 M	1	2004620xxx	PAC-S300-SL24-AR0-LLLM	1
6ES5 436-7LC11	6ES7321-1FF10-QAA0	Digital Input	8	1985980000	FAD S5115 SL24 M	1	2004630xxx	PAC-S300-SL24-AR1-LLLM	1
6ES5 441-7LA12	6ES7322-1BL00-QAA0	Digital Output	32	1991730000 ^{A)}	FAD S5115 2XHE20 32IO M	1	7789236xxx	PAC-S300-HE20-V4-LLLM	1
6ES5 451-7LA11	6ES7322-1BL00-QAA0	Digital Output	32	1991730000 ^{A)}	FAD S5115 2XHE20 32IO M	1	7789236xxx	PAC-S300-HE20-V4-LLLM	1
6ES5 451-7LA12	6ES7322-1BL00-QAA0	Digital Output	32	1991730000 ^{A)}	FAD S5115 2XHE20 32IO M	1	7789236xxx	PAC-S300-HE20-V4-LLLM	1
6ES5 451-7LA21	6ES7322-1BL00-QAA0	Digital Output	32	1991730000 ^{A)}	FAD S5115 2XHE20 32IO M	1	7789236xxx	PAC-S300-HE20-V4-LLLM	1
6ES5 454-7LA12	6ES7322-1BH00-QAA0	Digital Output	16	1986010000 ^{A)}	FAD S5115 HE20 16IO M	1	7789234xxx	PAC-S300-HE20-V3-LLLM	1
6ES5 458-7LB11	6ES7322-1HF10-QAA0	Digital Output	8	1985980000	FAD S5115 SL24 M	1	2004640xxx	PAC-S300-SL24-AY2-LLLM	1
6ES5460-7LA12 (current, voltage and TC)	6ES7331-7KF02-QAB0	Analogue Input	8	2045120000	FAD S5115 SL46 A M	1	2045970xxx	PAC-S300-SL46-AJO-LLLM	1
6ES5470-7LC12	6ES7332-5HF00-QAB0	Analogue Output	8	2045120000	FAD S5115 SL46 A M	1	2045910xxx	PAC-S300-SL46-AMO-LLLM	1
Note: A) FAD designed to work with only one power supply. Please contact us for information on other solution. B) Cable designed to work with only power supply. Please contact us for information on other solution.									

New system: Schneider Premium

Siemens S5-115	Schneider Premium	Card type	Number of signals	FAD			CABLES		
Old Card	New Card			Order No.	Type	Qty.	Order No.	Type	Qty.
6ES5 420-7LA11	TSX DEY 32D2K	Digital Input	32	1991730000 ^{A)}	FAD S5115 2XHE20 32IO M	1	7789301xxx	PAC-UNIV-HE20-1:1-LLLM	2
6ES5 430-7LA12	TSX DEY 32D2K	Digital Input	32	1991730000 ^{A)}	FAD S5115 2XHE20 32IO M	1	7789301xxx	PAC-UNIV-HE20-1:1-LLLM	2
6ES5 431-7LA11	TSX DEY 16D2 (24 V DC)	Digital Input	16	1986010000 ^{A)}	FAD S5115 HE20 16IO M	1	7789322xxx	PAC-PREM-HE20-VO-LLLM	1
6ES5 431-7LA11	TSX DEY 16D3 (48 V DC)	Digital Input	16	1986010000 ^{A)}	FAD S5115 HE20 16IO M	1	7789322xxx	PAC-PREM-HE20-VO-LLLM	1
6ES5 441-7LA12	TSX DSY 32T2K	Digital Output	32	1991730000 ^{A)}	FAD S5115 2XHE20 32IO M	1	7789301xxx	PAC-UNIV-HE20-1:1-LLLM	2
6ES5 451-7LA11	TSX DSY 32T2K	Digital Output	32	1991730000 ^{A)}	FAD S5115 2XHE20 32IO M	1	7789301xxx	PAC-UNIV-HE20-1:1-LLLM	2
6ES5 451-7LA12	TSX DSY 32T2K	Digital Output	32	1991730000 ^{A)}	FAD S5115 2XHE20 32IO M	1	7789301xxx	PAC-UNIV-HE20-1:1-LLLM	2
6ES5 451-7LA21	TSX DSY 32T2K	Digital Output	32	1991730000 ^{A)}	FAD S5115 2XHE20 32IO M	1	7789301xxx	PAC-UNIV-HE20-1:1-LLLM	2
6ES5 454-7LA12	TSX DSY 16T2	Digital Output	16	1986010000 ^{A)}	FAD S5115 HE20 16IO M	1	7789322xxx	PAC-PREM-HE20-VO-LLLM	1
6ES5 456-7LA11	TSX DSY 16R5	Digital Output	16	1985980000	FAD S5115 SL24 M	1	2004670xxx ^{B)}	PAC-PREM-SL24-AY2-LLLM	1

Note:

A) FAD designed to work with only one power supply. Please contact us for information on other solution.
B) Cable designed to work with only power supply. Please contact us for information on other solution.

Solutions on demand

Our retrofit front-panel adapters and interfaces are the easiest way to connect old PLCs with new PLC systems. The possible uses of our retrofit components are unlimited.

Weidmüller has developed many products for migration systems. We look forward to provide you with professional advice on the needed conversion for your system. Any customised solution is available on demand.

Selection Table for migration between SIEMENS S5-135 to Weidmüller u-remote/ SIEMENS S7-1500 and S7-300 / Schneider Premium

The following selection tables help you to choose the FAD and pre-assembled cables to migrate from S5-135 to other systems.

1. Select the right table, depending on the new systems you need to migrate
2. Select the combination of "old Card" / "new card" you need to migrate from the corresponding table. For example: 6ES5 420-4UA13 to 1315210000 UR20-16DI-P-PLC-INT
3. Select the order number of the FAD to be ordered:
 - FAD code 1986050000
 - Quantity: 1 unit (by card)
4. Generate the order number of the cable to be ordered:
 - Cable code 1349670xxx
 - Quantity: 2 unit (by card)

The last 3 digits indicate the length:
For example 015 indicates 1.5 m

Please always take into account the characteristics of the new PLC card so that it is able to provide enough current to your existing application to act the field elements.

New system: Weidmüller u-remote

Siemens S5-135 Old Card	Weidmüller u-remote New Card	Card type	Number of signals	FAD			CABLES		
				Order No.	Type	Qty.	Order No.	Type	Qty.
6ES5 420-4UA13	1315210000 UR20-16DI-P-PLC-INT (2 uds)	Digital Input	32	1986050000 ^{A)}	FAD S5135 2XHE20 32IO R	1	1349670xxx	PAC-UNIV-HE20-HE20-LLLM	2
6ES5 420-4UA14	1315210000 UR20-16DI-P-PLC-INT (2 uds)	Digital Input	32	1986050000 ^{A)}	FAD S5135 2XHE20 32IO R	1	1349670xxx	PAC-UNIV-HE20-HE20-LLLM	2
6ES5 430-4UA13	1315210000 UR20-16DI-P-PLC-INT (2 uds)	Digital Input	32	1986050000 ^{A)}	FAD S5135 2XHE20 32IO R	1	1349670xxx	PAC-UNIV-HE20-HE20-LLLM	2
6ES5 430-4UA14	1315210000 UR20-16DI-P-PLC-INT (2 uds)	Digital Input	32	1986050000 ^{A)}	FAD S5135 2XHE20 32IO R	1	1349670xxx	PAC-UNIV-HE20-HE20-LLLM	2
6ES5 432-4UA12	1315210000 UR20-16DI-P-PLC-INT (2 uds)	Digital Input	32	1986050000 ^{A)}	FAD S5135 2XHE20 32IO R	1	1349670xxx	PAC-UNIV-HE20-HE20-LLLM	2
6ES5 441-4UA13	1315270000 UR20-16DO-P-PLC-INT (2 uds)	Digital Output	32	1986050000 ^{A)}	FAD S5135 2XHE20 32IO R	1	1349670xxx	PAC-UNIV-HE20-HE20-LLLM	2
6ES5 441-4UA14	1315270000 UR20-16DO-P-PLC-INT (2 uds)	Digital Output	32	1986050000 ^{A)}	FAD S5135 2XHE20 32IO R	1	1349670xxx	PAC-UNIV-HE20-HE20-LLLM	2
6ES5 451-4UA13	1315270000 UR20-16DO-P-PLC-INT (2 uds)	Digital Output	32	1986050000 ^{A)}	FAD S5135 2XHE20 32IO R	1	1349670xxx	PAC-UNIV-HE20-HE20-LLLM	2
6ES5 451-4UA14	1315270000 UR20-16DO-P-PLC-INT (2 uds)	Digital Output	32	1986050000 ^{A)}	FAD S5135 2XHE20 32IO R	1	1349670xxx	PAC-UNIV-HE20-HE20-LLLM	2
Note: A) FAD designed to work with only one power supply. Please contact us for information on other solution. B) Cable designed to work with only power supply. Please contact us for information on other solution.									

New system: Siemens S7-1500

Siemens S5-135 Old Card	Siemens S7-1500 New Card	Card type	Number of signals	FAD			CABLES		
				Order No.	Type	Qty.	Order No.	Type	Qty.
6ES5 420-4UA13	6ES7521-1BL00-0AB0	Digital Input	32	1986050000 ^{A)}	FAD S5135 2XHE20 32IO R	1	1462040xxx	PAC-S1500-HE20-V0-LLLM	1
6ES5 420-4UA14	6ES7521-1BL00-0AB0	Digital Input	32	1986050000 ^{A)}	FAD S5135 2XHE20 32IO R	1	1462040xxx	PAC-S1500-HE20-V0-LLLM	1
6ES5 430-4UA13	6ES7521-1BL00-0AB0	Digital Input	32	1986050000 ^{A)}	FAD S5135 2XHE20 32IO R	1	1462040xxx	PAC-S1500-HE20-V0-LLLM	1
6ES5 430-4UA14	6ES7521-1BL00-0AB0	Digital Input	32	1986050000 ^{A)}	FAD S5135 2XHE20 32IO R	1	1462040xxx	PAC-S1500-HE20-V0-LLLM	1
6ES5 432-4UA12	6ES7521-1BL00-0AB0	Digital Input	32	1986050000 ^{A)}	FAD S5135 2XHE20 32IO R	1	1462040xxx	PAC-S1500-HE20-V0-LLLM	1
6ES5 436-4UA12	6ES7521-1FH00-0AA0	Digital Input	16	1986030000	FAD S5135 SL20 R	1	2004590xxx	PAC-S1500-SL20-ARO-LLLM	1
6ES5 441-4UA13	6ES7522-1BL00-0AB0	Digital Output	32	1986050000 ^{A)}	FAD S5135 2XHE20 32IO R	1	1462040xxx	PAC-S1500-HE20-V0-LLLM	1
6ES5 441-4UA14	6ES7522-1BL00-0AB0	Digital Output	32	1986050000 ^{A)}	FAD S5135 2XHE20 32IO R	1	1462040xxx	PAC-S1500-HE20-V0-LLLM	1
6ES5 451-4UA13	6ES7522-1BL00-0AB0	Digital Output	32	1986050000 ^{A)}	FAD S5135 2XHE20 32IO R	1	1462040xxx	PAC-S1500-HE20-V0-LLLM	1
6ES5 451-4UA14	6ES7522-1BL00-0AB0	Digital Output	32	1986050000 ^{A)}	FAD S5135 2XHE20 32IO R	1	1462040xxx	PAC-S1500-HE20-V0-LLLM	1
6ES5 456-4UB12	6ES7522-5FF00-0AB0	Digital Output	8	1986030000	FAD S5135 SL20 R	1	2004600xxx	PAC-S1500-SL20-AY0-LLLM	1
Note: A) FAD designed to work with only one power supply. Please contact us for information on other solution. B) Cable designed to work with only power supply. Please contact us for information on other solution.									

New system: Siemens S7-300

Siemens S5-135 Old Card	Siemens S7-300 New Card	Card type	Number of signals	FAD			CABLES		
				Order No.	Type	Qty.	Order No.	Type	Qty.
6ES5 420-4UA13	6ES7321-1BL00-0AA0	Digital Input	32	1986050000 ^{A)}	FAD S5135 2XHE20 32IO R	1	7789236xxx	PAC-S300-HE20-V4-LLLM	1
6ES5 420-4UA14	6ES7321-1BL00-0AA0	Digital Input	32	1986050000 ^{A)}	FAD S5135 2XHE20 32IO R	1	7789236xxx	PAC-S300-HE20-V4-LLLM	1
6ES5 430-4UA13	6ES7321-1BL00-0AA0	Digital Input	32	1986050000 ^{A)}	FAD S5135 2XHE20 32IO R	1	7789236xxx	PAC-S300-HE20-V4-LLLM	1
6ES5 430-4UA14	6ES7321-1BL00-0AA0	Digital Input	32	1986050000 ^{A)}	FAD S5135 2XHE20 32IO R	1	7789236xxx	PAC-S300-HE20-V4-LLLM	1
6ES5 432-4UA12	6ES7321-1BL00-0AA0	Digital Input	32	1986050000 ^{A)}	FAD S5135 2XHE20 32IO R	1	1349670xxx	PAC-UNIV-HE20-HE20-LLLM	1
6ES5 436-4UA12	6ES7321-1FH00-0AA0	Digital Input	16	1986030000	FAD S5135 SL20 R	1	2004880xxx	PAC-S300-SL20-ARO-LLLM	1
6ES5 436-4UB12	6ES7321-1HF10-0AA0	Digital Input	8	1986030000	FAD S5135 SL20 R	1	2004870xxx	PAC-S300-SL20-AR1-LLLM	1
6ES5 441-4UA13	6ES7322-1BL00-0AA0	Digital Output	32	1986050000 ^{A)}	FAD S5135 2XHE20 32IO R	1	1349670xxx	PAC-UNIV-HE20-HE20-LLLM	1
6ES5 441-4UA14	6ES7322-1BL00-0AA0	Digital Output	32	1986050000 ^{A)}	FAD S5135 2XHE20 32IO R	1	1349670xxx	PAC-UNIV-HE20-HE20-LLLM	1
6ES5 451-4UA13	6ES7322-1BL00-0AA0	Digital Output	32	1986050000 ^{A)}	FAD S5135 2XHE20 32IO R	1	7789236xxx	PAC-S300-HE20-V4-LLLM	1
6ES5 451-4UA14	6ES7322-1BL00-0AA0	Digital Output	32	1986050000 ^{A)}	FAD S5135 2XHE20 32IO R	1	7789236xxx	PAC-S300-HE20-V4-LLLM	1
6ES5 454-4UA13	6ES7322-1BH00-0AA0	Digital Output	16	1986040000 ^{A)}	FAD S5135 HE20 16IO R	1	7789234xxx	PAC-S300-HE20-V3-LLLM	1
6ES5 454-4UA14	6ES7322-1BH00-0AA0	Digital Output	16	1986040000 ^{A)}	FAD S5135 HE20 16IO R	1	7789234xxx	PAC-S300-HE20-V3-LLLM	1
6ES5 456-4UA12	6ES7322-1HH01-0AA0	Digital Output	16	1986030000	FAD S5135 SL20 R	1	2004860xxx	PAC-S300-SL20-AY0-LLLM	1
6ES5 456-4UB12	6ES7322-1HF10-0AA0	Digital Output	8	1986030000	FAD S5135 SL20 R	1	2004850xxx	PAC-S300-SL20-AY1-LLLM	1
Note: A) FAD designed to work with only one power supply. Please contact us for information on other solution. B) Cable designed to work with only power supply. Please contact us for information on other solution.									

New system: Schneider Premium

Siemens S5-135	Schneider Premium	Card type	Number of signals	FAD			CABLES		
Old Card	New Card			Order No.	Type	Qty.	Order No.	Type	Qty.
6ES5 420-4UA13	TSX DEY 32D2K	Digital Input	32	1986050000 ^{A)}	FAD S5135 2XHE20 32IO R	1	7789301xxx	PAC-UNIV-HE20-1:1-LLLM	2
6ES5 420-4UA14	TSX DEY 32D2K	Digital Input	32	1986050000 ^{A)}	FAD S5135 2XHE20 32IO R	1	7789301xxx	PAC-UNIV-HE20-1:1-LLLM	2
6ES5 430-4UA13	TSX DEY 32D2K	Digital Input	32	1986050000 ^{A)}	FAD S5135 2XHE20 32IO R	1	7789301xxx	PAC-UNIV-HE20-1:1-LLLM	2
6ES5 430-4UA14	TSX DEY 32D2K	Digital Input	32	1986050000 ^{A)}	FAD S5135 2XHE20 32IO R	1	7789301xxx	PAC-UNIV-HE20-1:1-LLLM	2
6ES5 432-4UA12	TSX DEY 32D2K	Digital Input	32	1986050000 ^{A)}	FAD S5135 2XHE20 32IO R	1	7789301xxx	PAC-UNIV-HE20-1:1-LLLM	2
6ES5 441-4UA13	TSX DSY 32T2K	Digital Output	32	1986050000 ^{A)}	FAD S5135 2XHE20 32IO R	1	7789301xxx	PAC-UNIV-HE20-1:1-LLLM	2
6ES5 441-4UA14	TSX DSY 32T2K	Digital Output	32	1986050000 ^{A)}	FAD S5135 2XHE20 32IO R	1	7789301xxx	PAC-UNIV-HE20-1:1-LLLM	2
6ES5 451-4UA13	TSX DSY 32T2K	Digital Output	32	1986050000 ^{A)}	FAD S5135 2XHE20 32IO R	1	7789301xxx	PAC-UNIV-HE20-1:1-LLLM	2
6ES5 451-4UA14	TSX DSY 32T2K	Digital Output	32	1986050000 ^{A)}	FAD S5135 2XHE20 32IO R	1	7789301xxx	PAC-UNIV-HE20-1:1-LLLM	2
Note: A) FAD designed to work with only one power supply. Please contact us for information on other solution. B) Cable designed to work with only power supply. Please contact us for information on other solution.									

Solutions on demand

Our retrofit front-panel adapters and interfaces are the easiest way to connect old PLCs with new PLC systems. The possible uses of our retrofit components are unlimited.

Weidmüller has developed many products for migration systems. We look forward to provide you with professional advice on the needed conversion for your system. Any customised solution is available on demand.

Selection Table for migration between Schneider TSX 7 to Weidmüller u-remote/ SIEMENS S7-1500 and S7-300 / Schneider Premium

The following selection tables help you to choose the FAD and pre-assembled cables to migrate from TSX 7 to other systems.

1. Select the right table, depending on the new systems you need to migrate

2. Select the combination of "old Card" / "new card" you need to migrate from the corresponding table. For example: TSX DET 16 12 to 1315210000
UR20-16DI-P-PLC-INT

3. Select the order number of the FAD to be ordered:

- FAD code 1985940000
- Quantity: 1 unit (by card)

4. Generate the order number of the cable to be ordered:

- Cable code 1349670xxx
- Quantity: 1 unit (by card)

The last 3 digits indicate the length:

For example 015 indicates 1.5 m

Please always take into account the characteristics of the new PLC card so that it is able to provide enough current to your existing application to act the field elements.

New system: Weidmüller u-remote

Schneider TSX7	Weidmüller u-remote	Card type	Number of signals	FAD			CABLES		
Old Card	New Card			Order No.	Type	Qty.	Order No.	Type	Qty.
TSX DET 16 12	1315210000 UR20-16DI-P-PLC-INT	Digital Input	16	1985940000^{A)}	FAD BLK 1 HE20 16I M	1	1349670xxx	PAC-UNIV-HE20-HE20-LLLM	1
TSX DET 32 52	1315210000 UR20-16DI-P-PLC-INT (2 uds)	Digital Input	32	1985960000	FAD BLK 7 2XHE20 M	1	1349670xxx	PAC-UNIV-HE20-HE20-LLLM	2
TSX DET 32 42	1315210000 UR20-16DI-P-PLC-INT (2 uds)	Digital Input	32	1985960000	FAD BLK 7 2XHE20 M	1	1349670xxx	PAC-UNIV-HE20-HE20-LLLM	2
TSX DET 32 32	1315210000 UR20-16DI-P-PLC-INT (2 uds)	Digital Input	32	1985960000	FAD BLK 7 2XHE20 M	1	1349670xxx	PAC-UNIV-HE20-HE20-LLLM	2
TSX DST 16 82	1315270000 UR20-16DO-P-PLC-INT	Digital Output	16	1985950000	FAD BLK 1 HE20 16O M	1	1349670xxx	PAC-UNIV-HE20-HE20-LLLM	1
TSX DST 32 92	1315270000 UR20-16DO-P-PLC-INT (2 uds)	Digital Output	32	1985970000	FAD BLK 9 2XHE20 M	1	1349670xxx	PAC-UNIV-HE20-HE20-LLLM	2
TSX DST 16 32	1315270000 UR20-16DO-P-PLC-INT	Digital Output	16	1985950000^{A)}	FAD BLK 1 HE20 16O M	1	1349670xxx	PAC-UNIV-HE20-HE20-LLLM	1

Note: A) FAD designed to work with only one power supply. Please contact us for information on other solution.
B) Cable designed to work with only power supply. Please contact us for information on other solution.

New system: Siemens S7-1500

Schneider TSX7	Siemens S7-1500	Card type	Number of signals	FAD			CABLES		
Old Card	New Card			Order No.	Type	Qty.	Order No.	Type	Qty.
TSX DET 16 12	6ES7521-1BH00-0AA0	Digital Input	16	1985940000^{A)}	FAD BLK 1 HE20 16I M	1	1462090xxx	PAC-S1500-HE20-V1-LLLM	1
TSX DET 16 04	6ES7521-1FH00-0AA0	Digital Input	16	1985930000	FAD BLK 1 SL24 M	1	2004610xxx	PAC-S1500-SL24-AR0-LLLM	1
TSX DET 32 52	6ES7521-1BL00-0AB0	Digital Input	32	1985960000	FAD BLK 7 2XHE20 M	1	1462040xxx	PAC-S1500-HE20-V0-LLLM	1
TSX DET 32 42	6ES7521-1BL00-0AB0	Digital Input	32	1985960000	FAD BLK 7 2XHE20 M	1	1462040xxx	PAC-S1500-HE20-V0-LLLM	1
TSX DET 32 32	6ES7521-1BL00-0AB0	Digital Input	32	1985960000	FAD BLK 7 2XHE20 M	1	1462040xxx	PAC-S1500-HE20-V0-LLLM	1
TSX DST 32 92	6ES7522-1BL00-0AB0	Digital Output	32	1985970000	FAD BLK 9 2XHE20 M	1	1462040xxx	PAC-S1500-HE20-V0-LLLM	1
TSX DST 16 32	6ES7522-1BH00-0AB0	Digital Output	16	1985950000	FAD BLK 1 HE20 16O M	1	1462090xxx	PAC-S1500-HE20-V1-LLLM	1

Note: A) FAD designed to work with only one power supply. Please contact us for information on other solution.
B) Cable designed to work with only power supply. Please contact us for information on other solution.

New system: Siemens S7-300

Schneider TSX7	Siemens S7-300	Card type	Number of signals	FAD			CABLES		
Old Card	New Card			Order No.	Type	Qty.	Order No.	Type	Qty.
TSX DET 16 12	6ES7321-1BH00-0AA0	Digital Input	16	1985940000^{A)}	FAD BLK 1 HE20 16I M	1	7789234xxx	PAC-S300-HE20-V3-LLLM	1
TSX DET 16 12	6ES7321-1BH01-0AA0	Digital Input	16	1985940000^{A)}	FAD BLK 1 HE20 16I M	1	7789234xxx	PAC-S300-HE20-V3-LLLM	1
TSX DET 16 12	6ES7321-1BH02-0AA0	Digital Input	16	1985940000^{A)}	FAD BLK 1 HE20 16I M	1	7789234xxx	PAC-S300-HE20-V3-LLLM	1
TSX DET 16 04	6ES7 321-1FH00-0AA0	Digital Input	16	1985930000	FAD BLK 1 SL24 M	1	2004660xxx	PAC-S300-SL24-AR2-LLLM	1
TSX DET 8 05	6ES7 321-1FF10-0AA0	Digital Input	8	1985930000	FAD BLK 1 SL24 M	1	2004660xxx	PAC-S300-SL24-AR3-LLLM	1
TSX DET 32 52	6ES7 321-1BL00-0AA0	Digital Input	32	1985960000	FAD BLK 7 2XHE20 M	1	7789236xxx	PAC-S300-HE20-V4-LLLM	1
TSX DET 32 52	6ES7 321-1BL80-0AA0	Digital Input	32	1985960000	FAD BLK 7 2XHE20 M	1	7789236xxx	PAC-S300-HE20-V4-LLLM	1
TSX DET 32 42	6ES7 321-1BL00-0AA0	Digital Input	32	1985960000	FAD BLK 7 2XHE20 M	1	7789236xxx	PAC-S300-HE20-V4-LLLM	1
TSX DET 32 42	6ES7 321-1BL80-0AA0	Digital Input	32	1985960000	FAD BLK 7 2XHE20 M	1	7789236xxx	PAC-S300-HE20-V4-LLLM	1
TSX DET 32 32	6ES7 321-1BL00-0AA0	Digital Input	32	1985960000	FAD BLK 7 2XHE20 M	1	7789236xxx	PAC-S300-HE20-V4-LLLM	1
TSX DET 32 32	6ES7 321-1BL80-0AA0	Digital Input	32	1985960000	FAD BLK 7 2XHE20 M	1	7789236xxx	PAC-S300-HE20-V4-LLLM	1
TSX DST 16 82	6ES7322-1BL00-0AA0	Digital Output	16	1985950000	FAD BLK 1 HE20 16O M	1	7789234xxx	PAC-S300-HE20-V3-LLLM	1
TSX DST 32 92	6ES7322-1BH00-0AA0	Digital Output	32	1985970000	FAD BLK 9 2XHE20 M	1	7789236xxx	PAC-S300-HE20-V4-LLLM	1
TSX DST 16 32	6ES7322-1BL00-0AA0	Digital Output	16	1985950000	FAD BLK 1 HE20 16O M	1	7789234xxx	PAC-S300-HE20-V3-LLLM	1

Note: A) FAD designed to work with only one power supply. Please contact us for information on other solution.
B) Cable designed to work with only power supply. Please contact us for information on other solution.

New system: Schneider Premium

Schneider TSX7	Schneider Premium	Card type	Number of signals	FAD			CABLES		
Old Card	New Card			Order No.	Type	Qty.	Order No.	Type	Qty.
TSX DET 16 12	TSX DEY 16D2	Digital Input	16	1985940000 ^{A)}	FAD BLK 1 HE20 16I M	1	7789322xxx	PAC-PREM-HE20-VO-LLLM	1
TSX DET 16 13/16 33	TSX DEY 16D3	Digital Input	16	1985940000 ^{A)}	FAD BLK 1 HE20 16I M	1	7789322xxx	PAC-PREM-HE20-VO-LLLM	1
TSX DET 32 52	TSX DEY 32D2K	Digital Input	32	1985960000	FAD BLK 7 2XHE20 M	1	7789301xxx	PAC-UNIV-HE20-1:1-LLLM	2
TSX DET 32 42	TSX DEY 32D2K	Digital Input	32	1985960000	FAD BLK 7 2XHE20 M	1	7789301xxx	PAC-UNIV-HE20-1:1-LLLM	2
TSX DET 32 32	TSX DEY 32D2K	Digital Input	32	1985960000	FAD BLK 7 2XHE20 M	1	7789301xxx	PAC-UNIV-HE20-1:1-LLLM	2
TSX DST 16 82	TSX DSY 16T2	Digital Output	16	1985950000	FAD BLK 1 HE20 16O M	1	7789322xxx	PAC-PREM-HE20-VO-LLLM	1
TSX DST 32 92	TSX DSY 32T2K	Digital Output	32	1985970000	FAD BLK 9 2XHE20 M	1	7789301xxx	PAC-UNIV-HE20-1:1-LLLM	2
TSX DST 16 35	TSX DSY 16R5	Digital Output	16	1985930000	FAD BLK 1 SL24 M	1	2004680xxx ^{B)}	PAC-PREM-SL24-AYO-LLLM	1
TSX DST 16 33	TSX DSY 16R5	Digital Output	16	1985930000	FAD BLK 1 SL24 M	1	2004680xxx ^{B)}	PAC-PREM-SL24-AYO-LLLM	1
TSX DST 8 04	TSX DSY 08R5	Digital Output	8	1985930000	FAD BLK 1 SL24 M	1	2004690xxx	PAC-PREM-SL24-AI1-LLLM	1
TSX DST 8 05	TSX DSY 08R5	Digital Output	8	1985930000	FAD BLK 1 SL24 M	1	2004690xxx	PAC-PREM-SL24-AI1-LLLM	1
TSX DST 16 04	TSX DSY 16S4	Digital Output	16	1985930000	FAD BLK 1 SL24 M	1	2004680xxx ^{B)}	PAC-PREM-SL24-AYO-LLLM	1
TSX DST 16 04	TSX DSY 16R5	Digital Output	16	1985930000	FAD BLK 1 SL24 M	1	2004680xxx ^{B)}	PAC-PREM-SL24-AYO-LLLM	1
Note: A) FAD designed to work with only one power supply. Please contact us for information on other solution. B) Cable designed to work with only power supply. Please contact us for information on other solution.									

Solutions on demand

Our retrofit front-panel adapters and interfaces are the easiest way to connect old PLCs with new PLC systems. The possible uses of our retrofit components are unlimited.

Weidmüller has developed many products for migration systems. We look forward to provide you with professional advice on the needed conversion for your system. Any customised solution is available on demand.

FAD – front adapters for migrations from Siemens S5-115

FAD – front adapters for migrations from Siemens S5-115

The FAD S5-115 front adapters with pre-assembled cables provide safe migration from the old S5-115 to other PLC systems or to the u-remote system from Weidmüller.

- Clip-in foot for TS35
- S5-115 card is powered by a single power supply

FAD S5115 HE20 16IO M



Technical data

Connection data
Connection (field side)
Rated data
Operating voltage
Max. current per channel
Max. current per byte
Total operating current
General data
Ambient temperature (operational)
Storage temperature
Approvals
Insulation coordination (EN 50178)
Rated insulation voltage
Surge voltage category
Pollution severity level
Insulation test voltage

Plug-in connectors according to IEC 60603-13 / DIN 41651 20p
30 V AC / 60 V DC
1 A
2 A
3 A
-25...50°C
-40...60 °C
CE
< 50 V AC
III
2
0.35 kVAC

Dimensions
Length / Width / Height

280.45 mm / 46 mm / 36.4 mm

Note

Ordering data


||
||
||

Type	Qty.	Order No.
FAD S5115 HE20 16IO M	1	1986010000

Note

Accessories

Note

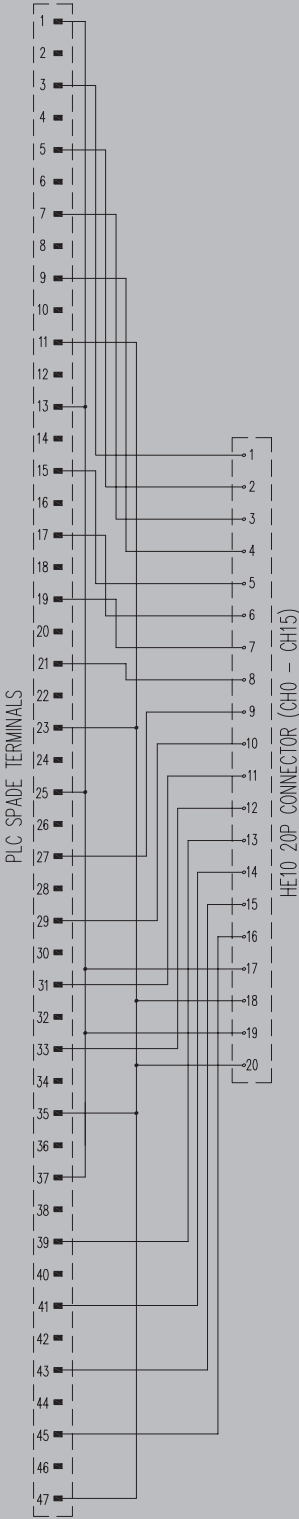

FAD – front adapters for migrations
from Siemens S5-115

The FAD S5-115 front adapters with pre-assembled cables provide safe migration from the old S5-115 to other PLC systems or to the u-remote system from Weidmüller.

- Clip-in foot for TS35
- S5-115 card is powered by a single power supply

FAD S5115 2XHE20 32IO M



Technical data

Connection data
Connection (field side)
Rated data
Operating voltage
Max. current per channel
Max. current per byte
Total operating current
General data
Ambient temperature (operational)
Storage temperature
Approvals
Insulation coordination (EN 50178)
Rated insulation voltage
Surge voltage category
Pollution severity level
Insulation test voltage

2 x Connector according IEC60603-13/DIN41651 20 p
30 V AC / 60 V DC
1 A
2 A
6 A
-25...50°C
-40...60 °C
CE
< 50 V AC
III
2
0.35 kVAC

Dimensions
Length / Width / Height

280.45 mm / 46 mm / 36.4 mm

Note

Ordering data


--

Type	Qty.	Order No.
FAD S5115 2XHE20 32IO M	1	1991730000

Note

Accessories

Note

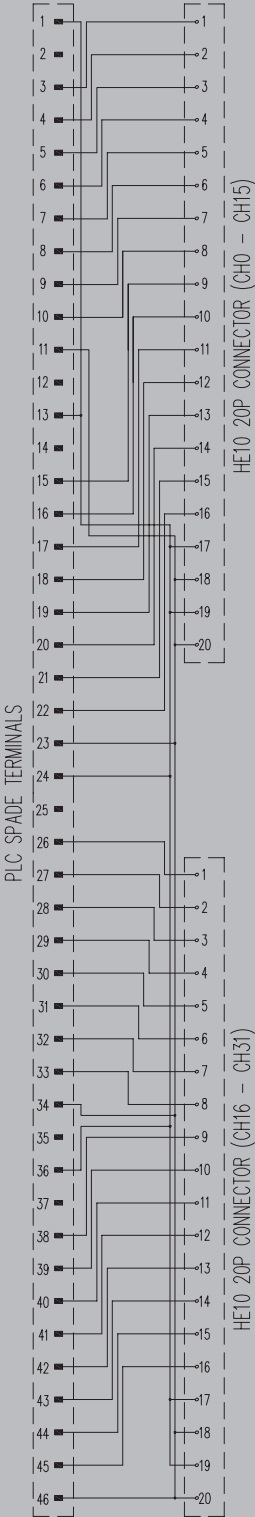

FAD – front adapters for migrations from Siemens S5-115

FAD – front adapters for migrations from Siemens S5-115

The FAD S5-115 front adapters with pre-assembled cables provide safe migration from the old S5-115 to other PLC systems or to the u-remote system from Weidmüller.

- Clip-in foot for TS35
- S5-115 card is powered by a single power supply

FAD S5115 SL24 M



Technical data

Connection data	
Connection (field side)	
Rated data	
Operating voltage	
Max. current per channel	
Max. current per byte	
Total operating current	
General data	
Ambient temperature (operational)	
Storage temperature	
Approvals	
Insulation coordination (EN 50178)	
Rated insulation voltage	
Surge voltage category	
Pollution severity level	
Insulation test voltage	

SL 5.08 mm
250 V AC
6 A
32 A
-25...50°C
-40...60 °C
CE
< 250 V AC
II
2
1.2 kVAC

Dimensions
Length / Width / Height

280.45 mm / 46 mm / 24.7 mm

Note

Ordering data


--

Type	Qty.	Order No.
FAD S5115 SL24 M	1	1985980000

Note

Accessories

Note

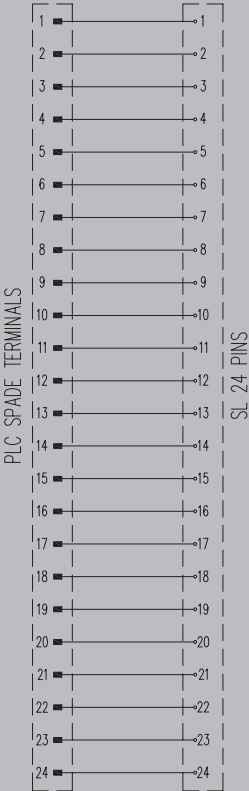

FAD – front adapters for migrations
from Siemens S5-115

The FAD S5-115 front adapters with pre-assembled cables provide safe migration from the old S5-115 to other PLC systems or to the u-remote system from Weidmüller.

- Clip-in foot for TS35
- S5-115 card is powered by a single power supply

FAD S5115 SL46 A M



Technical data

Connection data	
Connection (field side)	
Rated data	
Operating voltage	
Max. current per channel	
Max. current per byte	
Total operating current	
General data	
Ambient temperature (operational)	
Storage temperature	
Approvals	
Insulation coordination (EN 50178)	
Rated insulation voltage	
Surge voltage category	
Pollution severity level	
Insulation test voltage	

SL 5.08 mm
250 V AC
6 A
32 A
-25...50°C
-40...60 °C
< 250 V AC
II
2
1.2 kVAC

Dimensions
Length / Width / Height

280.45 mm / 46 mm / 24.7 mm

Note

Ordering data


--

Type	Qty.	Order No.
FAD S5115 SL46 A M	1	2045120000

Note

Accessories

--

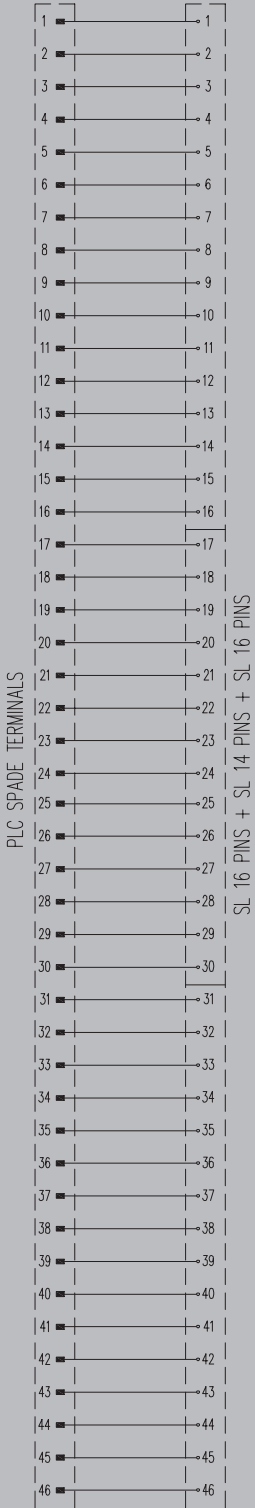

FAD – front adapters for migrations from Siemens S5-135

FAD – front adapters for migrations from Siemens S5-135

The FAD S5-135 front adapters with pre-assembled cables provide safe migration from the old S5-135 to other PLC systems or to the u-remote system from Weidmüller.

- S5-135 card is powered by a single power supply

FAD S5135 HE20 16IO M



Technical data

Connection data
Connection (field side)
Rated data
Operating voltage
Max. current per channel
Max. current per byte
Total operating current
General data
Ambient temperature (operational)
Storage temperature
Approvals
Insulation coordination (EN 50178)
Rated insulation voltage
Surge voltage category
Pollution severity level
Insulation test voltage

Plug-in connectors according to IEC 60603-13 / DIN 41651 20p
30 V AC / 60 V DC
1 A
2 A
3 A
-25...50°C
-40...60 °C
CE
< 50 V AC
III
2
0.35 kVAC

Dimensions
Length / Width / Height

283 mm / 20 mm / 36.4 mm

Note

Ordering data


--

Type	Qty.	Order No.
FAD S5135 HE20 16IO R	1	1986040000

Note

Accessories

Note

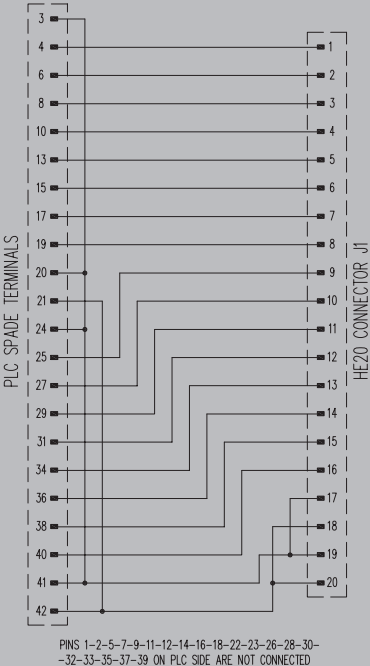

FAD – front adapters for migrations
from Siemens S5-135

The FAD S5-135 front adapters with pre-assembled cables provide safe migration from the old S5-135 to other PLC systems or to the u-remote system from Weidmüller.

- S5-135 card is powered by a single power supply

FAD S5135 2XHE20 32IO M



Technical data

Connection data	
Connection (field side)	
Rated data	
Operating voltage	
Max. current per channel	
Max. current per byte	
Total operating current	
General data	
Ambient temperature (operational)	
Storage temperature	
Approvals	
Insulation coordination (EN 50178)	
Rated insulation voltage	
Surge voltage category	
Pollution severity level	
Insulation test voltage	

2 x Connector according IEC60603-13/DIN41651 20 p
30 V AC / 60 V DC
1 A
2 A
6 A
-25...50°C
-40...60 °C
CE
< 50 V AC
III
2
0.35 kVAC

Dimensions
Length / Width / Height

283 mm / 20 mm / 36.4 mm

Note

Ordering data


--

Type	Qty.	Order No.
FAD S5135 2XHE20 32IO R	1	1986050000

Note

Accessories

Note

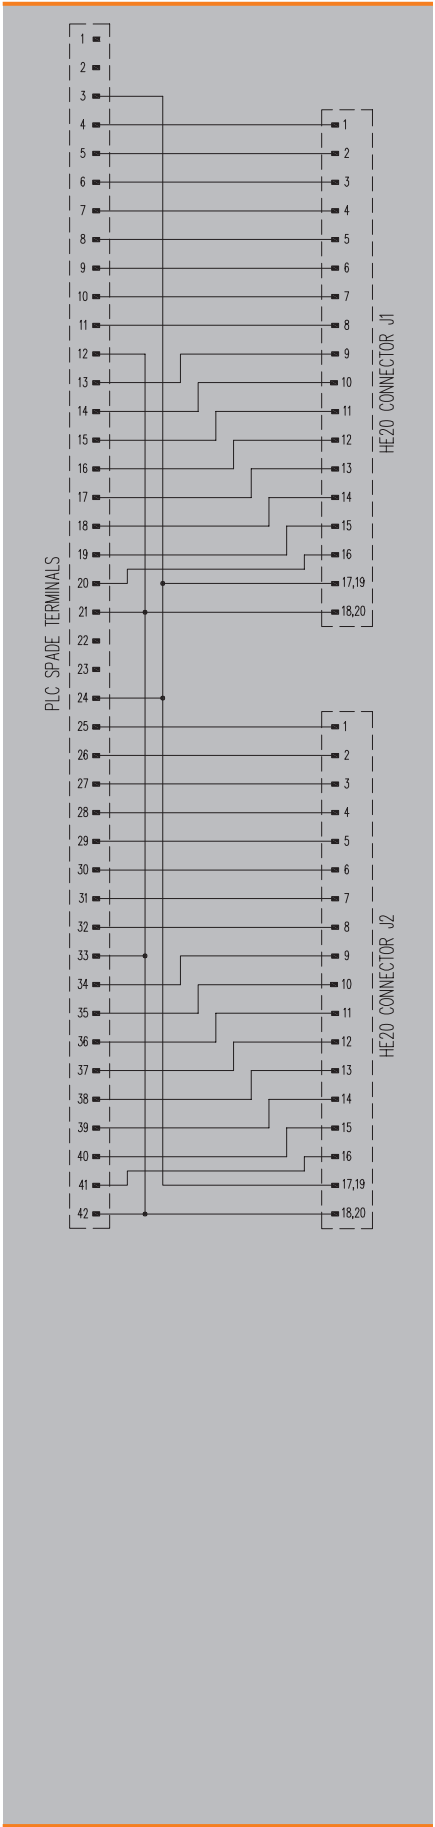

FAD – front adapters for migrations from Siemens S5-135

FAD – front adapters for migrations from Siemens S5-135

The FAD S5-135 front adapters with pre-assembled cables provide safe migration from the old S5-135 to other PLC systems or to the u-remote system from Weidmüller.

- S5-135 card is powered by a single power supply

FAD S5135 SL20 M



Technical data

Connection data	
Connection (field side)	SL 5.08 mm
Rated data	
Operating voltage	250 V AC
Max. current per channel	6 A
Max. current per byte	
Total operating current	32 A
General data	
Ambient temperature (operational)	-25...50°C
Storage temperature	-40...60 °C
Approvals	CE
Insulation coordination (EN 50178)	
Rated insulation voltage	< 250 V AC
Surge voltage category	II
Pollution severity level	2
Insulation test voltage	1.2 kVAC

Dimensions	
Length / Width / Height	283 mm / 20 mm / 24.7 mm

Note	
------	--


Ordering data

Type	Qty.	Order No.
FAD S5135 SL20 R	1	1986030000

Note	
------	--

Accessories

Note	
------	--

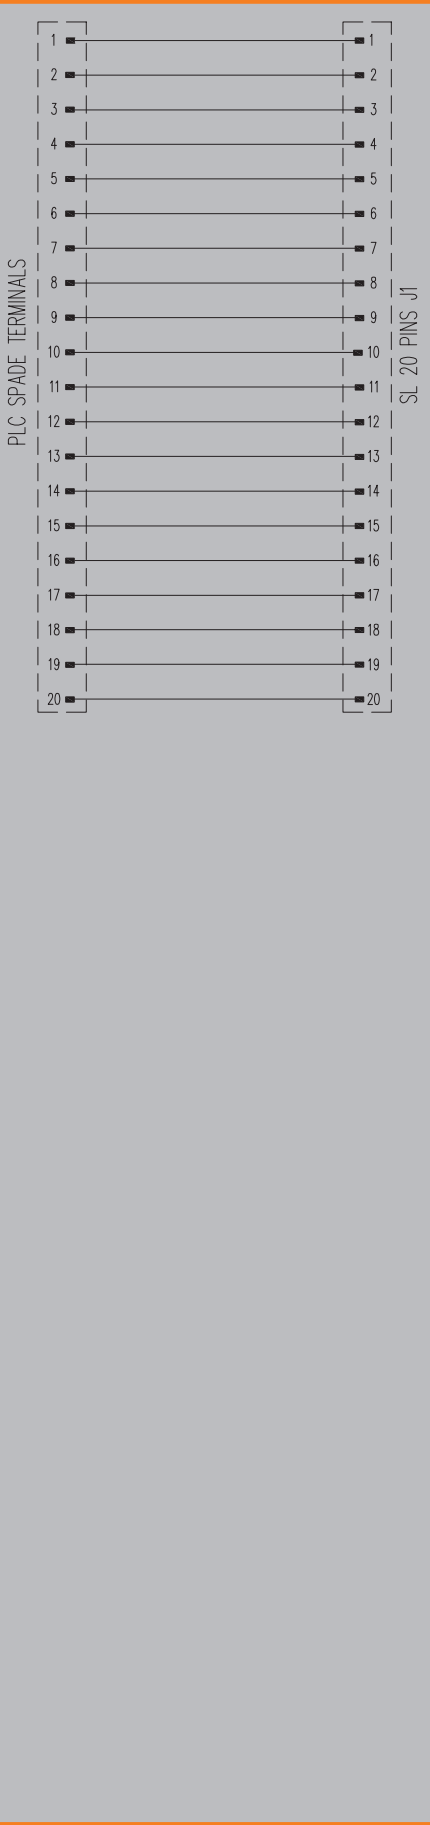

FAD – front adapters for migrations from Schneider TSX47

The FAD BLK front adapters with pre-assembled cables provide safe migration from the old TSX47 to other PLC systems or to the u-remote system from Weidmüller.

- Clip-in foot for TS35

FAD BLK1 HE20 16I M



Technical data

Connection data
Connection (field side)
Rated data
Operating voltage
Max. current per channel
Max. current per byte
Total operating current
General data
Ambient temperature (operational)
Storage temperature
Approvals
Insulation coordination (EN 50178)
Rated insulation voltage
Surge voltage category
Pollution severity level
Insulation test voltage

Plug-in connectors according to IEC 60603-13 / DIN 41651 20p
30 V AC / 60 V DC
1 A
2 A
3 A
-25...50°C
-40...60 °C
CE
< 50 V AC
III
2
0.35 kVAC

Dimensions
Length / Width / Height

218 mm / 53.6 mm / 36.4 mm

Note

Ordering data

--

Type	Qty.	Order No.
FAD BLK1 HE20 16I M	1	1985940000

Note

Accessories

Note

FAD – front adapters for migrations from Schneider TSX

FAD – front adapters for migrations from Schneider TSX47

The FAD BLK front adapters with pre-assembled cables provide safe migration from the old TSX47 to other PLC systems or to the u-remote system from Weidmüller.

- Clip-in foot for TS35

FAD BLK1 HE20 160 M



Technical data

Connection data
Connection (field side)
Rated data
Operating voltage
Max. current per channel
Max. current per byte
Total operating current
General data
Ambient temperature (operational)
Storage temperature
Approvals
Insulation coordination (EN 50178)
Rated insulation voltage
Surge voltage category
Pollution severity level
Insulation test voltage

Plug-in connectors according to IEC 60603-13 / DIN 41651 20p
30 V AC / 60 V DC
1 A
2 A
3 A
-25...50°C
-40...60 °C
CE
< 50 V AC
III
2
0.35 kVAC

Dimensions
Length / Width / Height

218 mm / 53.6 mm / 36.4 mm

Note

Ordering data


--

Type	Qty.	Order No.
FAD BLK1 HE20 160 M	1	1985950000

Note

Accessories

Note

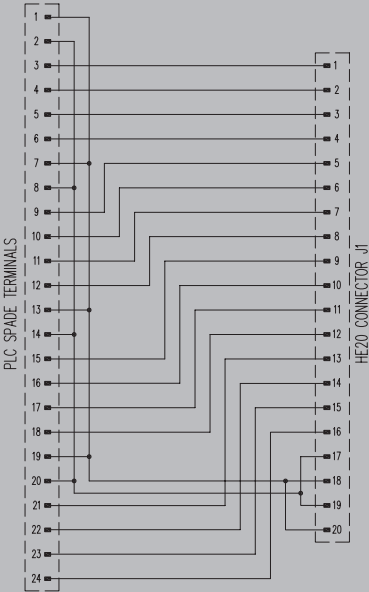

FAD – front adapters for migrations from Schneider TSX47

The FAD BLK front adapters with pre-assembled cables provide safe migration from the old TSX47 to other PLC systems or to the u-remote system from Weidmüller.

- Clip-in foot for TS35

FAD BLK1 SL24 M



Technical data

Connection data	
Connection (field side)	
Rated data	
Operating voltage	
Max. current per channel	
Max. current per byte	
Total operating current	
General data	
Ambient temperature (operational)	
Storage temperature	
Approvals	
Insulation coordination (EN 50178)	
Rated insulation voltage	
Surge voltage category	
Pollution severity level	
Insulation test voltage	

SL 5.08 mm
250 V AC
6 A
32 A
-25...50°C
-40...60 °C
CE
< 250 V AC
II
2
1.2 kVAC

Dimensions
Length / Width / Height

218 mm / 53.6 mm / 36.4 mm

Note

Ordering data


--

Type	Qty.	Order No.
FAD BLK1 SL24 M	1	1985930000

Note

Accessories

Note

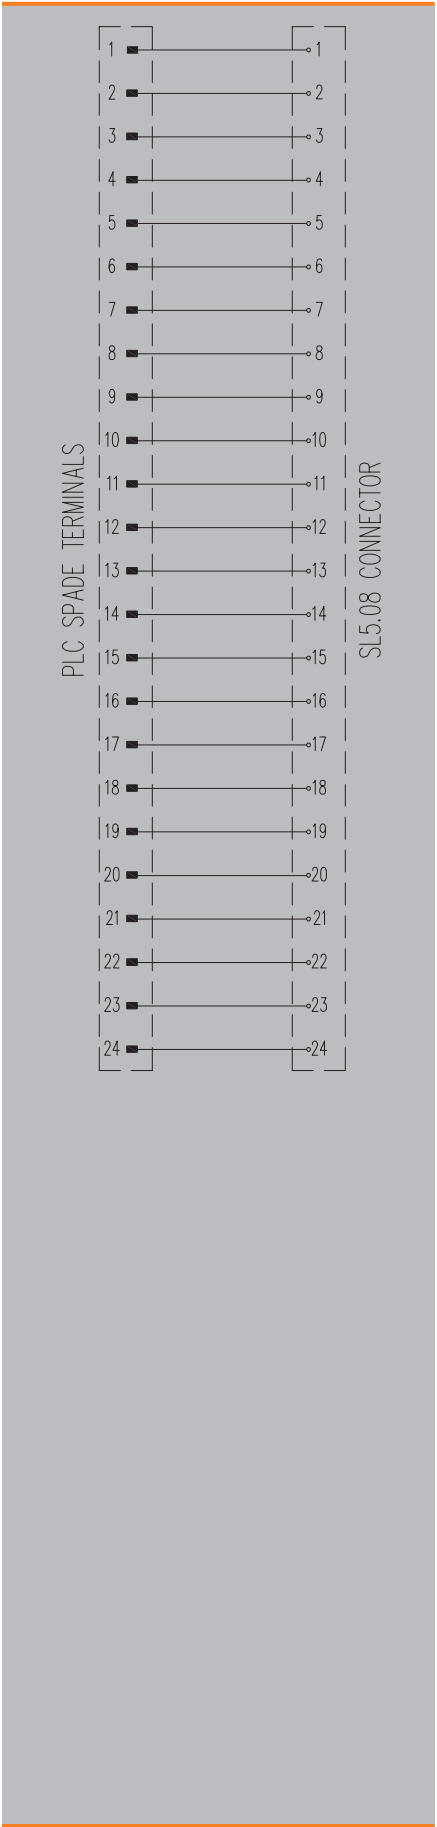

FAD – front adapters for migrations from Schneider TSX

FAD – front adapters for migrations from Schneider TSX47

The FAD BLK front adapters with pre-assembled cables provide safe migration from the old TSX47 to other PLC systems or to the u-remote system from Weidmüller.

- Clip-in foot for TS35

FAD BLK7 2XHE20 M



Technical data

Connection data	
Connection (field side)	
Rated data	
Operating voltage	
Max. current per channel	
Max. current per byte	
Total operating current	
General data	
Ambient temperature (operational)	
Storage temperature	
Approvals	
Insulation coordination (EN 50178)	
Rated insulation voltage	
Surge voltage category	
Pollution severity level	
Insulation test voltage	

2 x Connector according IEC60603-13/DIN41651 20 p	
30 V AC / 60 V DC	
1 A	
2 A	
6 A	
-25...50°C	
-40...60 °C	
CE	
< 250 V AC	
III	
2	
1.2 kVAC	

Dimensions	
Length / Width / Height	

218 mm / 53.6 mm / 36.4 mm

Note	
------	--

Ordering data


--

Type	Qty.	Order No.
FAD BLK7 2XHE20 M	1	1985960000

Note	
------	--

Accessories

--

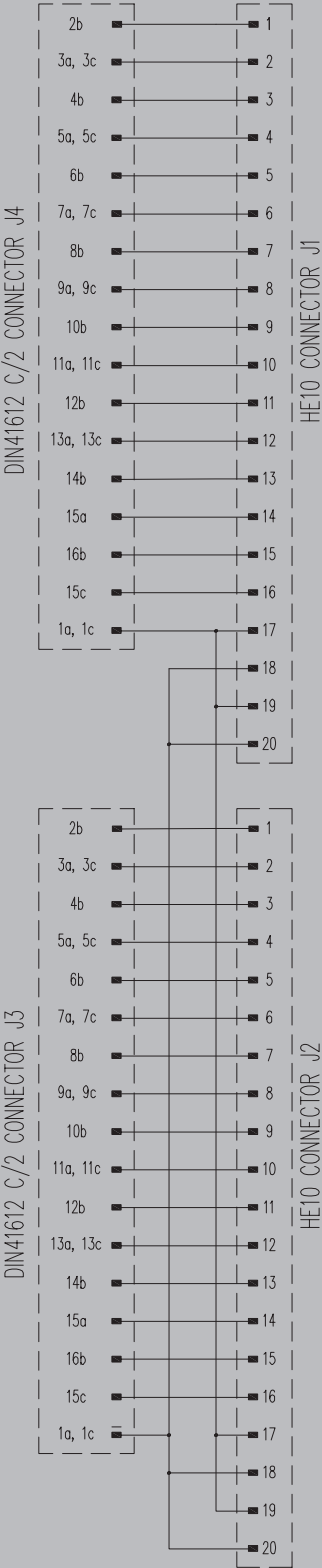

FAD – front adapters for migrations from Schneider TSX47

The FAD BLK front adapters with pre-assembled cables provide safe migration from the old TSX47 to other PLC systems or to the u-remote system from Weidmüller.

- Clip-in foot for TS35

FAD BLK9 2XHE20 M



Technical data

Connection data
Connection (field side)
Rated data
Operating voltage
Max. current per channel
Max. current per byte
Total operating current
General data
Ambient temperature (operational)
Storage temperature
Approvals
Insulation coordination (EN 50178)
Rated insulation voltage
Surge voltage category
Pollution severity level
Insulation test voltage

2 x Connector according IEC60603-13/DIN41651 20 p
30 V AC / 60 V DC
1 A
2 A
6 A
-25...50°C
-40...60 °C
CE
< 250 V AC
III
2
1.2 kVAC

Dimensions
Length / Width / Height

218 mm / 53.6 mm / 36.4 mm

Note

Ordering data


--

Type	Qty.	Order No.
FAD BLK9 2XHE20 M	1	1985970000

Note

Accessories

Note

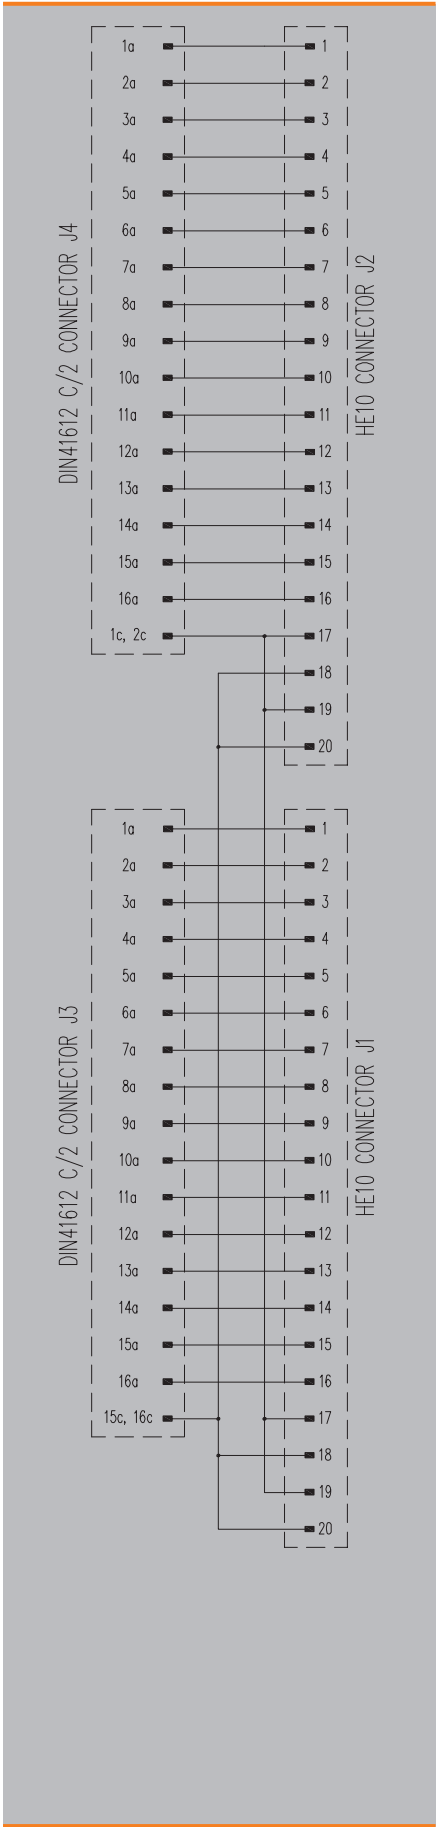

MIGRATION RACK – Migration accessories

MIGRATION RACK – Migration accessories

- The 19" racks have the same dimensions as the original Siemens or Schneider racks
- The front adapters (FAD) are installed in the bottom section of the rack while the new PLC is located in the top section
- The racks are fitted with a hinge that provides access to the old cabling

MIGRATION RACK S5 115 H



MIGRATION RACK S5 135 H



Technical data

Material		
Material	Stainless steel	Stainless steel

Dimensions		
Length / Width / Height	482.5 mm / 212 mm / 120.6 mm	482.5 mm / 283 mm / 120.6 mm
Note		
Ordering data		
Type	Qty.	Order No.
MIGRATION RACK S5 115 H	1	1993530000
Type	Qty.	Order No.
MIGRATION RACK S5 135 H	1	1993500000
Note		
Accessories		
Note	19" Rails: S7-1500 6ES7590-1AE80-0AA0, S7-300 6ES7390-1AE80-0AA0, Premium TSX RKY 12, Weidmüller TS35 2003740000	19" Rails: S7-1500 6ES7590-1AE80-0AA0, S7-300 6ES7390-1AE80-0AA0, Premium TSX RKY 12, Weidmüller TS35 2003740000

MIGRATION RACK – Migration accessories

- The 19" racks have the same dimensions as the original Siemens or Schneider racks
- The front adapters (FAD) are installed in the bottom section of the rack while the new PLC is located in the top section
- The racks are fitted with a hinge that provides access to the old cabling

MIGRATION RACK TSX7 H



Technical data

Material
Material

Material
Stainless steel

Dimensions
Length / Width / Height

482.5 mm / 212 mm / 120.6 mm

Note

Ordering data

--

Type	Qty.	Order No.
MIGRATION RACK TSX7 H	1	1993520000

Note

Accessories

Note

19" Rails: S7-1500 6ES7590-1AE80-0AA0, S7-300 6ES7390-1AE80-0AA0, Premium TSX RKY 12, Weidmüller TS35 2003740000
--

RS F20 X – Redundancy interfaces


RS F20 X – Redundancy interfaces

- Connection 1 to 1 for input interfaces
- Diode protection for output interfaces

RS F20 X3 IN



RS F20 X3 OUT

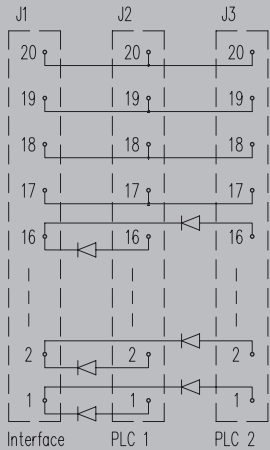

Technical data

Connection data
Connection on control side
Number of poles (control side)
Earthing
Rated data
Rated voltage
Rated current per connection
Total operating current
General data
Ambient temperature (operational)
Storage temperature
Approvals
Insulation coordination (EN 50178)
Rated insulation voltage
Surge voltage category
Pollution severity level
Insulation test voltage

Connection data
3 x connector in accordance with IEC60603-13 / DIN41651
20-pole
No
Rated data
50 V AC / 70 V DC
0.5 A
3 A
General data
-25...50°C
-40...60 °C
CE
Insulation coordination (EN 50178)
50 V AC / 70 V DC
II
2
0.35 kVAC

Connection data
3 x connector in accordance with IEC60603-13 / DIN41651
20-pole
No
Rated data
50 V AC / 70 V DC
0.5 A
3 A
General data
-25...50°C
-40...60 °C
CE
Insulation coordination (EN 50178)
50 V AC / 70 V DC
II
2
0.35 kVAC

Dimensions
Mounting rail
Width / Height

Dimensions
TS 35, TS 32
70 / 50 mm

Dimensions
TS 35, TS 32
70 / 50 mm

Note

Note

Note

Ordering data

Type
Without diodes
With diodes

Type	Length	Order No.
RS F20 X3 IN	40 mm	1461210000

Type	Length	Order No.
RS F20 X3 OUT	65 mm	1461220000

Note

Note

Note

Accessories

Note

Note

Note

Card holders

Card holders	Introduction	H.2
	Card holders	H.4

Card holders



Card holders are used for adapting Euro 19" format (100 x 160 mm) cards to plug-in connectors acc. to IEC 603/DIN 41612 and DIN 41617.

Cardholders can be used in industrial applications when:

- Adapting several 19" cards: As well as saving on the cost of a rack, accessibility is improved, because usually racks are only accessible from behind.
- The PCB card is in a remote position, making it difficult to install the cabling.
- It is necessary to extend legacy systems by adding more electronic modules.
- There are processes where quick replacement of the printed circuit and easy handling of connections is important.

Card holders have the following individual components:

- Snap-fit base and mechanism for securing the card
- Assembly plate and feet for direct assembly or for locking on DIN rails
- Printed circuit board where the following features can be identified:
 - Plug-in connectors acc. IEC 603/DIN 41612 and DIN 41617
 - Weidmüller terminals for screw connection




Card holders

SKH2 Card holders


Card holders are used for adapting Euro cards (19") to plug connectors to IEC 603/DIN 41612 and DIN 41617.

- Screw connection
- Installed on rail TS 35 with accessories

SKH2 31

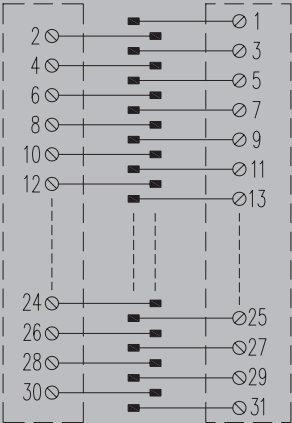

SKH2 D32 LP

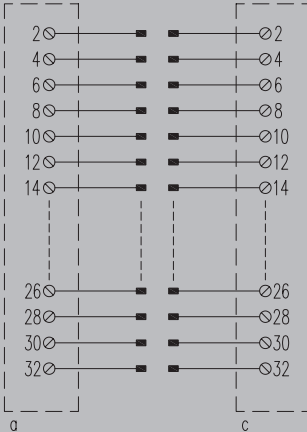

Technical data

Connection data	
Connection on control side	
Type (control side)	
Number of poles (control side)	
Contact assembly	
Design of the pluggable board	
Rated data	
Rated voltage	
Rated current per connection	
General data	
Ambient temperature (operational)	
Storage temperature	
Approvals	
Insulation coordination (EN 50178)	
Rated insulation voltage	
Surge voltage category	
Pollution severity level	
Pulse voltage test (1,2/50µs)	

Plug-in connector, acc. to DIN 41617 female
31-pole female
a and b
100x160 mm euro format for 19" racks
125V AC / 150V DC
4 A
0...55°C
-40...60 °C
CE
< 150 V AC
II
2
1.5 kV

Plug-in connector, acc. to DIN 41612 female
32D
32-pole female
a and c
100x160 mm euro format for 19" racks
250 V UC
4 A
0...55°C
-40...60 °C
CE
250 V
II
2
2.1 kV

Dimensions
Clamping range, min./max. (field)
Length x width x height

0.13 mm ² / 6 mm ²
60.7 mm / 160 mm / 192.5 mm

0.13 mm ² / 6 mm ²
55 mm / 160 mm / 192.5 mm

Note

Note

Note

Ordering data

Type	Qty.	Order No.
------	------	-----------

Type	Qty.	Order No.
SKH2 31 LP	1	8174800000

Type	Qty.	Order No.
SKH2 D32 LP	1	8174830000

Note

Note

Note


Accessories

Note

Kit for connection to TS35 8209340000

Kit for connection to TS35 8209340000

SKH2 F32 Z+B

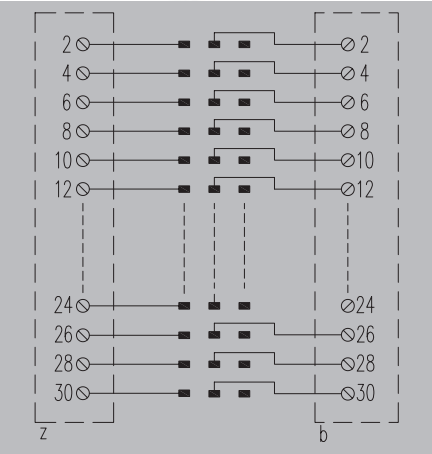


Plug-in connector, acc. to DIN 41612 female
32F
32-pole female
z and b
100x160 mm euro format for 19" racks
250 V UC
4 A
0...55°C
-40...60 °C
CE
250 V
II
2
2.1 kV

0.13 mm² / 6 mm²
80.7 mm / 160 mm / 192.5 mm

Type	Qty.	Order No.
SKH2 F32 (Z+B) LPP	1	8174850000

Kit for connection to TS35 8209340000

SKH2 F32 Z+D

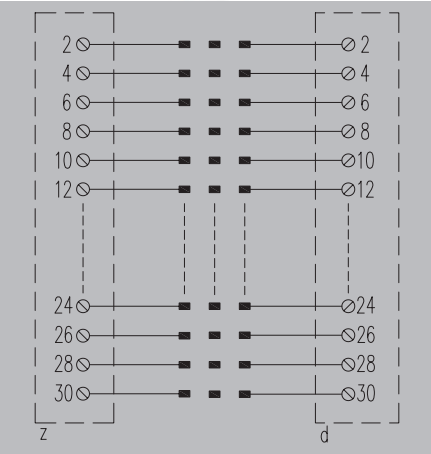

Plug-in connector, acc. to DIN 41612 female
32F
32-pole female
z and d
100x160 mm euro format for 19" racks
250 V UC
4 A
0...55°C
-40...60 °C
CE
250 V
II
2
2.1 kV

0.13 mm² / 6 mm²
80.7 mm / 160 mm / 192.5 mm

Type	Qty.	Order No.
SKH2 F32 (Z+D) LP	1	8174860000

Kit for connection to TS35 8209340000


Card holders

SKH


Card holders are used for adapting Euro cards (19") to plug connectors to IEC 603/DIN 41612 and DIN 41617.

- Screw connection
- Installed on rail TS 35 with accessories

SKH31

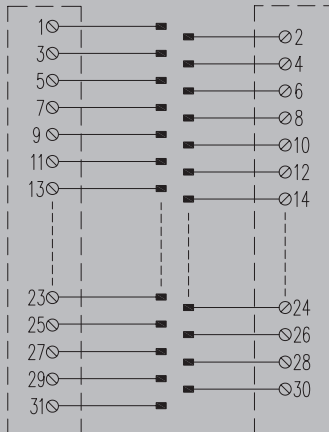

SKH31 250VAC

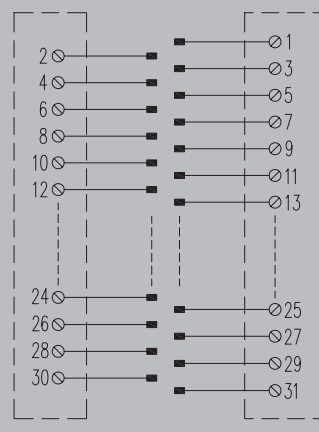

Technical data

Connection data

Connection on control side
Type (control side)
Number of poles (control side)
Contact assembly
Design of the pluggable board

Rated data

Rated voltage
Rated current per connection

General data

Ambient temperature (operational)
Storage temperature
Approvals

Insulation coordination (EN 50178)

Rated insulation voltage
Surge voltage category
Pollution severity level
Pulse voltage test (1,2/50µs)

Plug-in connector, acc. to DIN 41617 female

31-pole female
a and b
100x160 mm euro format for 19" racks

125V AC / 150V DC
4 A

0...55°C
-40...60 °C
CE

< 150 V AC
II
2
1.5 kV

Plug-in connector, acc. to DIN 41617 female

31-pole female
a and b
100x160 mm euro format for 19" racks

250 V UC
4 A

0...55°C
-40...60 °C
CE

250 V
II
2
2.1 kV

Dimensions

Clamping range, min./max. (field)
Length x width x height

0.13 mm² / 6 mm²
47.5 mm / 131 mm / 144 mm

0.13 mm² / 6 mm²
47.5 mm / 131 mm / 144 mm

Note

Ordering data

1 clamping bracket
2 clamping brackets

Type	Qty.	Order No.
SKH 31 LP RH1	1	0586661001

Type	Qty.	Order No.
SKH 31 LP 250VAC RH1	1	0648661001

Note


Accessories

Note

Kit for connection to TS35: Installation motherboard 2054280000 and mounting foot to TS35 0687900000

Kit for connection to TS35: Installation motherboard 2054280000 and mounting foot to TS35 0687900000

SKH B64

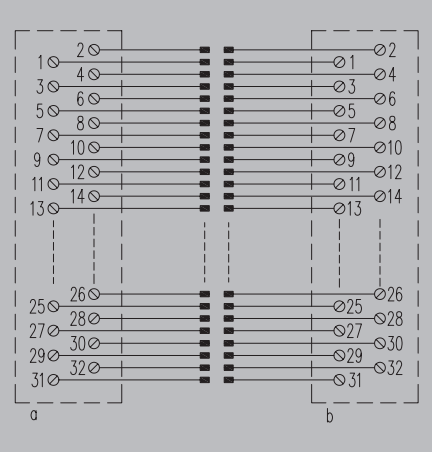


Plug-in connector, acc. to DIN 41612 female
B64
64-pole female
a and b
100x160 mm euro format for 19" racks
125V AC / 150V DC
1 A
0...55°C
-40...60 °C
CE
< 150 V AC
II
2
1.5 kV

0.13 mm² / 6 mm²
76 mm / 131 mm / 144 mm

Type	Qty.	Order No.
SKH B64 RH2	1	0577360000

Kit for connection to TS35: Installation motherboard 2054280000 and mounting foot to TS35 0687900000

SKH C64

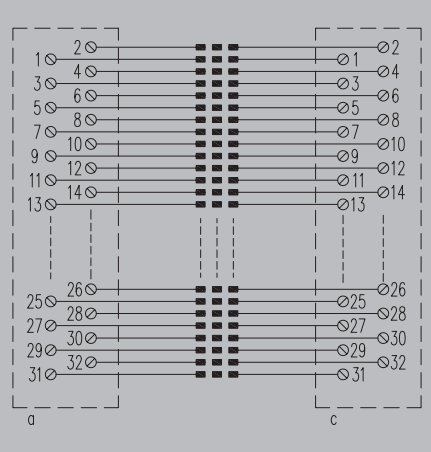


Plug-in connector, acc. to DIN 41612 female
64C
64-pole female
a and c
100x160 mm euro format for 19" racks
125V AC / 150V DC
1 A
0...55°C
-40...60 °C
CE
< 150 V AC
II
2
1.5 kV

0.13 mm² / 6 mm²
76 mm / 131 mm / 144 mm

Type	Qty.	Order No.
SKH C64 RH2	1	0646660000
SKH C64 RH2	1	0178960000

Kit for connection to TS35: Installation motherboard 2054280000 and mounting foot to TS35 0687900000

SKH D32

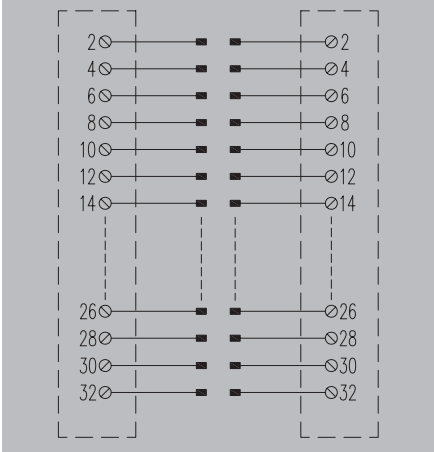

Plug-in connector, acc. to DIN 41612 female
32D
32-pole female
a and c
100x160 mm euro format for 19" racks
250 V UC
4 A
0...55°C
-40...60 °C
CE
250 V
II
2
2.1 kV

0.13 mm² / 6 mm²
50.8 mm / 131 mm / 144 mm

Type	Qty.	Order No.
SKH D32 LP 5/16 RH2	1	0586761001

Kit for connection to TS35: Installation motherboard 2054280000 and mounting foot to TS35 0687900000


Card holders

SKH


Card holders are used for adapting Euro cards (19") to plug connectors to IEC 603/DIN 41612 and DIN 41617.

- Screw connection
- Installed on rail TS 35 with accessories

SKH E48

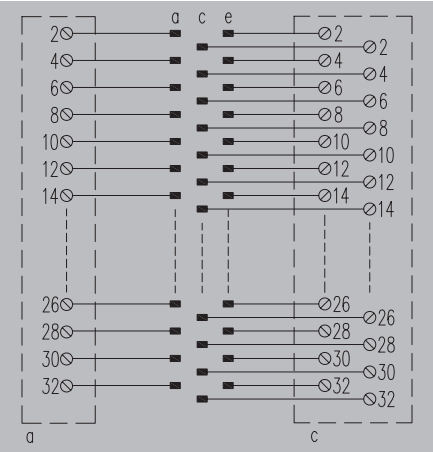

SKF F32 Z+B

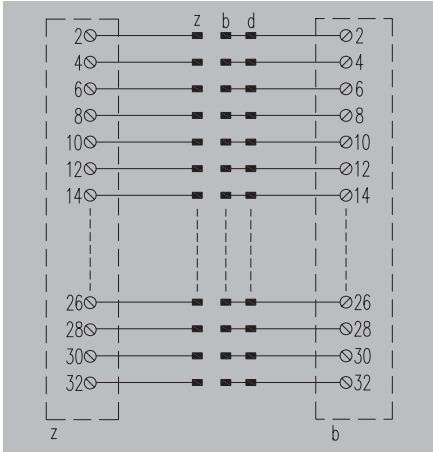

Technical data

Connection data
Connection on control side
Type (control side)
Number of poles (control side)
Contact assembly
Design of the pluggable board
Rated data
Rated voltage
Rated current per connection
General data
Ambient temperature (operational)
Storage temperature
Approvals
Insulation coordination (EN 50178)
Rated insulation voltage
Surge voltage category
Pollution severity level
Pulse voltage test (1,2/50µs)

Plug-in connector, acc. to DIN 41612 female
48E
48-pole female
e, c, a
100x160 mm euro format for 19" racks
125V AC / 150V DC
4 A
0...55°C
-40...60 °C
CE
< 150 V AC
II
2
1.5 kV

Plug-in connector, acc. to DIN 41612 female
32F
32-pole female
z and b
100x160 mm euro format for 19" racks
250 V UC
4 A
0...55°C
-40...60 °C
CE
250 V
II
2
2.1 kV

Dimensions
Clamping range, min./max. (field)
Length x width x height

0.13 mm ² / 6 mm ²
69 mm / 131 mm / 144 mm

0.13 mm ² / 6 mm ²
50.8 mm / 131 mm / 144 mm

Note

Note

Note

Ordering data

Type	Qty.	Order No.
SKH E48 LP2/LP	1	0690660000

Type	Qty.	Order No.
SKH E48 LP2/LP	1	0690660000

Type	Qty.	Order No.
SKH F32 (Z&B) LP RH2	1	0586861001

Note

Note

Note


Accessories

Note

Kit for connection to TS35: Installation motherboard 2054280000 and mounting foot to TS35 0687900000
--

Kit for connection to TS35: Installation motherboard 2054280000 and mounting foot to TS35 0687900000
--

SKF F32 Z+D

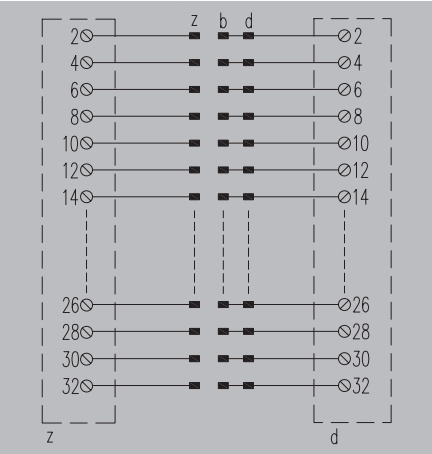


Plug-in connector, acc. to DIN 41612 female
32F
32-pole female
z and d
100x160 mm euro format for 19" racks
250 V UC
4 A
0...55°C
-40...60 °C
CE
250 V
II
2
2.1 kV

0.13 mm² / 6 mm²
50.8 mm / 131 mm / 144 mm

Type	Qty.	Order No.
SKH F32 (Z&D) LP RH2	1	0586961001

Kit for connection to TS35: Installation motherboard 2054280000 and mounting foot to TS35 0687900000

SKH F48

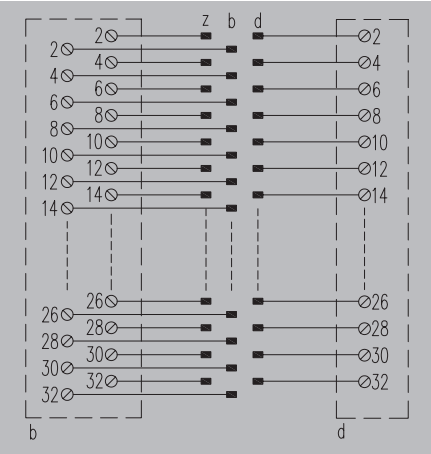

Plug-in connector, acc. to DIN 41612 female
48F
48-pole female
z, b, d
100x160 mm euro format for 19" racks
125V AC / 150V DC
4 A
0...55°C
-40...60 °C
CE
< 150 V AC
II
2
1.5 kV

0.13 mm² / 6 mm²
56 mm / 131 mm / 144 mm

Type	Qty.	Order No.
SKH F48	1	0587060000

Kit for connection to TS35: Installation motherboard 2054280000 and mounting foot to TS35 0687900000


Card holders

SKH

Card holders are used for adapting Euro cards (19") to plug connectors to IEC 603/DIN 41612 and DIN 41617.

- Screw connection
- Installed on rail TS 35 with accessories

SKH H15

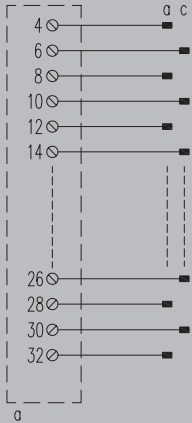

Technical data

Connection data
Connection on control side
Type (control side)
Number of poles (control side)
Contact assembly
Design of the pluggable board
Rated data
Rated voltage
Rated current per connection
General data
Ambient temperature (operational)
Storage temperature
Approvals
Insulation coordination (EN 50178)
Rated insulation voltage
Surge voltage category
Pollution severity level
Pulse voltage test (1,2/50µs)

Plug-in connector, acc. to DIN 41612 female
15H
15-pole female
a and c
100x160 mm euro format for 19" racks
250 V UC
10 A
0...55°C
-40...60 °C
CE
250 V
II
2
2.1 kV

Dimensions
Clamping range, min./max. (field)
Length x width x height

0.13 mm ² / 6 mm ²
56 mm / 131 mm / 144 mm

Note

Note

Ordering data

1 clamping bracket
2 clamping brackets

Type	Qty.	Order No.
SKH H15S	1	8051300000

Note

Note

Accessories

Note


Kit for connection to TS35: Installation motherboard 2054280000 and mounting foot to TS35 0687900000
--

SKH x 2


Card holders are used for adapting Euro cards (19") to plug connectors to IEC 603/DIN 41612 and DIN 41617.

- Screw connection
- Installed on rail TS 35 with accessories

SKH 2XC64 A+C

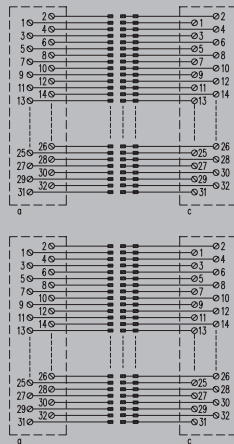

SKH 2XD32 A+C

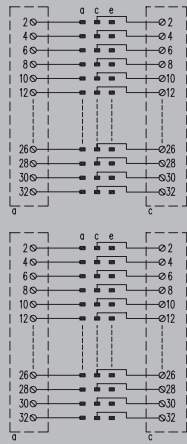

Technical data

Connection data
Connection on control side
Type (control side)
Number of poles (control side)
Contact assembly
Design of the pluggable board
Rated data
Rated voltage
Rated current per connection
General data
Ambient temperature (operational)
Storage temperature
Approvals
Insulation coordination (EN 50178)
Rated insulation voltage
Surge voltage category
Pollution degree
Pulse voltage test (1,2/50µs)

Plug-in connector, acc. to DIN 41612 female
64C
64-pole female
a and c
233x160 mm double euro format for 19" enclosures
125V AC / 150V DC
1 A
0...55°C
-40...70 °C
CE
125 V AC
II
2
1.1 kV

Plug-in connector, acc. to DIN 41612 female
32D
32-pole female
a and c
233x160 mm double euro format for 19" enclosures
125V AC / 150V DC
4 A
0...55°C
-40...70 °C
CE
125 V AC
II
2
1.1 kV

Dimensions

Clamping range, min./max. (field)
Length x width x height

0.13 mm ² / 6 mm ²
69 mm / 286 mm / 144 mm

0.13 mm ² / 6 mm ²
69 mm / 286 mm / 144 mm

Note

Ordering data

1 clamping bracket

Type	Qty.	Order No.
SKH C64*2 (A&C) RH2	1	8013120000

Type	Qty.	Order No.
SKH D32*2 LP5.08/16 RH2	1	8050981001

Note

Accessories

Note

Kit for connection to TS35: Installation motherboard 2051430000 and mounting foot TS35 0687900000

Kit for connection to TS35: Installation motherboard 2051430000 and mounting foot TS35 0687900000

Index

Index	Index Type	X.2
	Index Order No.	X.6

Type	Order No.	Page
C		
C300-16B-160B-2S-M14-1M	1481680010	B.17
C300-16B-160B-2S-M25-1M	1481690010	B.17
C300-16B-160B-2S-M34-1M	1481710010	B.17
C300-16B-160B-2S-M50-1M	1481720010	B.17
C300-16B-F-2S-M14-1M	1481730010	B.18
C300-16B-F-2S-M25-1M	1481740010	B.18
C300-16B-F-2S-M34-1M	1481750010	B.18
C300-16B-F-2S-M50-1M	1481760010	B.18
C300-32B-216B-2S-M14-1M	1373730010	B.19
C300-32B-216B-2S-M25-1M	1373770010	B.19
C300-32B-216B-2S-M34-1M	7789886010	B.19
C300-32B-216B-2S-M50-1M	1373790010	B.19
C300-32B-320B-2S-M14-1M	7789887010	B.13
C300-32B-320B-2S-M25-1M	7789828010	B.13
C300-32B-320B-2S-M34-1M	7789888010	B.13
C300-32B-320B-2S-M50-1M	7789838010	B.13
C300-32B-F-2S-M14-1M	1373740010	B.15
C300-32B-F-2S-M25-1M	1349350010	B.15
C300-32B-F-2S-M34-1M	7789617010	B.15
C300-32B-F-2S-M50-1M	7789895010	B.15
C300-36B-324B-2S-M14-1M	7789890010	B.14
C300-36B-324B-2S-M25-1M	7789829010	B.14
C300-36B-324B-2S-M34-1M	7789891010	B.14
C300-36B-324B-2S-M50-1M	7789892010	B.14
C300-36B-F-2S-M14-1M	1373750010	B.16
C300-36B-F-2S-M25-1M	1349370010	B.16
C300-36B-F-2S-M34-1M	1373780010	B.16
C300-36B-F-2S-M50-1M	1373820010	B.16

D		
DEK 5 TB-V1	1379120000	C.18
DEK 5 TB-V2	1379110000	C.18
DEK 5 TB-V3	1371120000	C.18
DEK 5 TB-V6	1390690000	C.6
DEK 5 TB-V7	1390680000	C.6
DEK 5 TB-V8	1388240000	C.6
DEK 5 TB-V9	1388250000	C.6
DEK 5/5 TB-V15	1404320000	C.20
DEK 5/5 TB-V16	1404330000	C.20
DEK 5/5 TB-V17	1411860000	C.8
DEK 5/5 TB-V18	1411870000	C.8
DEK 5/5 TB-V19	1411880000	C.8
DEK 5/5 TB-V20	1411890000	C.8
DEK 5/5 TB-V23	1414780000	C.14
DEK 5/5 TB-V25	1414820000	C.12
DEK 5/5 TB-V26	1414830000	C.15

F		
FAD BLK1 HE20 16I M	1985940000	G.23
FAD BLK1 HE20 160 M	1985950000	G.24
FAD BLK1 SL24 M	1985930000	G.25
FAD BLK7 2XHE20 M	1985960000	G.26
FAD BLK9 2XHE20 M	1985970000	G.27
FAD S5115 2XHE20 32IO M	1991730000	G.17
FAD S5115 HE20 16IO M	1986010000	G.6
FAD S5115 SL24 M	1985980000	G.6
FAD S5115 SL46 A M	2045120000	G.19
FAD S5135 2XHE20 32IO R	1986050000	G.21
FAD S5135 HE20 16IO R	1986040000	G.9
FAD S5135 SL20 R	1986030000	G.22
FTA C300-16AI-SH-S	1247120000	B.8
FTA C300-16AI-SH-Z	1247130000	B.8
FTA C300-16AI-TEST-S	1247140000	B.8
FTA C300-16AI-TEST-Z	1247150000	B.8
FTA C300-16AO-SH-P	1223010000	B.9
FTA C300-16AO-SH-S	1222980000	B.9
FTA C300-16AO-SH-Z	1222990000	B.9
FTA C300-16AO-TEST-S	1223020000	B.9
FTA C300-16AO-TEST-Z	1223030000	B.9
FTA C300-16AO-TP-Z	2000020000	B.10
FTA C300-16DAI-SH-S	1415220000	B.10
FTA C300-16DAI-SH-Z	1415230000	B.10
FTA C300-32DI-24VDC-S	1312040000	B.11
FTA C300-32DHD-S	1222940000	B.6
FTA C300-32DHD-Z	1222950000	B.6
FTA C300-32DIOHV-S	1221550000	B.6
FTA C300-32DIOHV-Z	1221560000	B.6
FTA C300-32DO-FUSE-S	1246910000	B.7
FTA C300-32DO-FUSE-Z	1246920000	B.7
FTA C300-32DOL-S	1221590000	B.7
FTA C300-32DOLD-Z	1221600000	B.7
FTA C300-32DORSLIM-S	1221570000	B.12
FTA C300-32DORSLIM-Z	1221580000	B.12
FUS G 25/1.00A/F	2437240000	C.15
FUSE G 25/2A/F BL	4007530000	C.25
FUSE G 25/6.30A/F GN	4007550000	C.22
FUSE MST250 0.1A TR5	1391740000	C.25
FUSE MST250 1A TR5	1391770000	C.22

K		
KSW 4 TB-V17	1411810000	C.8
KSW 4 TB-V18	1411820000	C.8
KSW 4 TB-V19	1411830000	C.8
KSW 4 TB-V20	1411840000	C.8

Type	Order No.	Page
KSW 4 TB-V23	1414850000	C.14
KSW 4 TB-V25	1414880000	C.12
KSW 4 TB-V26	1414910000	C.15
KSW 4 TB-V3	1394330000	C.18
KSW 5 TB-V1	1390700000	C.18
KSW 5 TB-V15	1404550000	C.20
KSW 5 TB-V16	1404540000	C.20
KSW 5 TB-V2	1394320000	C.18
KSW 5 TB-V6	1394340000	C.6
KSW 5 TB-V7	1394350000	C.6
KSW 5 TB-V8	1394370000	C.6
KSW 5 TB-V9	1394380000	C.6

M		
MIGRATION RACK S5 115 H	1993530000	G.28
MIGRATION RACK S5 135 H	1993500000	G.28
MIGRATION RACK TSX7 H	1993520000	G.29

P		
PAC-ABS8-HE20-V0	7789641xxx	A.12
PAC-ABS8-HE20-V1	7789643xxx	A.12
PAC-ABS8-SD25-V0	7789657xxx	A.12
PAC-C300-1616-14-1M	1481590010	B.17
PAC-C300-1616-25-1M	1481610010	B.17
PAC-C300-1616-34-1M	1481620010	B.17
PAC-C300-1616-50-1M	1481630010	B.17
PAC-C300-16-F-14-1M	1481640010	B.18
PAC-C300-16-F-25-1M	1481650010	B.18
PAC-C300-16-F-34-1M	1481660010	B.18
PAC-C300-16-F-50-1M	1481670010	B.18
PAC-C300-32-1616-14-1M	1373830010	B.19
PAC-C300-32-1616-25-1M	1373880010	B.19
PAC-C300-32-1616-34-1M	7789893010	B.19
PAC-C300-32-1616-50-1M	1373920010	B.19
PAC-C300-3232-14-1M	7789879010	B.13
PAC-C300-3232-25-1M	7789880010	B.13
PAC-C300-3232-34-1M	1498820010	B.13
PAC-C300-3232-50-1M	7789882010	B.13
PAC-C300-32-F-14-1M	1373840010	B.15
PAC-C300-32-F-25-1M	1349330010	B.15
PAC-C300-32-F-34-1M	1373900010	B.15
PAC-C300-32-F-50-1M	1373940010	B.15
PAC-C300-3636-14-1M	7789883010	B.14
PAC-C300-3636-25-1M	7789884010	B.14
PAC-C300-3636-34-1M	7789885010	B.14
PAC-C300-3636-50-1M	7789837010	B.14
PAC-C300-36-F-14-1M	1373850010	B.16
PAC-C300-36-F-25-1M	1349340010	B.16
PAC-C300-36-F-34-1M	1373910010	B.16
PAC-C300-36-F-50-1M	1373950010	B.16
PAC-CJ1W-HE20-V0	7789772xxx	A.19
PAC-CJ1W-HE20-V11	7789793xxx	A.19
PAC-CJ1W-HE20-V12	7789794xxx	A.19
PAC-CJ1W-HE20-V13	7789893xxx	A.19
PAC-CJ1W-HE20-V3	7789373xxx	A.19
PAC-CJ1W-HE20-V4	7789645xxx	A.19
PAC-CJ1W-HE20-V5	7789650xxx	A.19
PAC-CJ1W-HE20-V7	7789767xxx	A.19
PAC-CJ1W-HE20-V8	7789768xxx	A.30
PAC-CJ1W-HE20-V9	7789771xxx	A.30
PAC-CJ1W-RV12-V0	7789648xxx	A.19
PAC-CJ1W-RV24-V0	7789649xxx	A.19
PAC-CJ1W-RV24-V1	7789664xxx	A.19
PAC-CJ1W-UNIS-V0-XXXX	2426790xxx	F.9
PAC-CJ1W-UNIU-V0-XXXX	2426780xxx	F.9
PAC-CMLX-HE20-V0	7789015xxx	A.20
PAC-CMLX-HE20-V3	7789695xxx	A.20
PAC-CMLX-HE20-V4	7789697xxx	A.20
PAC-CMLX-HE20-V5	7789769xxx	A.20
PAC-CMLX-HE20-V6	7789770xxx	A.20
PAC-CMLX-HE20-V7	7789831xxx	A.20
PAC-CMLX-HE20-V8	7789832xxx	A.20
PAC-CMLX-RV12-V0	7789017xxx	A.20
PAC-CMLX-RV24-V1	7789016xxx	A.20
PAC-CMLX-RV24-V2	7789024xxx	A.20
PAC-CMLX-RV24-V3	7789025xxx	A.20
PAC-CMLX-SD15-V0	7789026xxx	A.20
PAC-CMLX-SD15-V1	7789027xxx	A.20
PAC-CMLX-SD15-V2	7789029xxx	A.20
PAC-CMLX-SD15-V3	7789043xxx	A.20
PAC-CMLX-SD15-V4	7789046xxx	A.20
PAC-CMLX-SD15-V5	7789047xxx	A.20
PAC-CMLX-SD25-V0	7789028xxx	A.20
PAC-CMLX-SD25-V1	7789044xxx	A.20
PAC-CMLX-SD25-V2	7789045xxx	A.20
PAC-CMLX-UNIS-V0-XXXX	1350270xxx	F.9
PAC-CMLX-UNIU-V0-XXXX	1350250xxx	F.9
PAC-CTLX-HE20-V0	7789039xxx	A.21
PAC-CTLX-HE20-V1	7789040xxx	A.21
PAC-CTLX-HE20-V2	7789041xxx	A.21
PAC-CTLX-HE20-V3	7789042xxx	A.21
PAC-CTLX-HE20-V4	7789049xxx	A.21
PAC-CTLX-HE20-V5	7789058xxx	A.21
PAC-CTLX-HE20-V6	7789059xxx	A.21
PAC-CTLX-HE20-V7	7789151xxx	A.21
PAC-CTLX-HE20-V8	7789152xxx	A.21
PAC-CTLX-RV12-V0	7789048xxx	A.21

Type	Order No.	Page
PAC-CTLX-RV12-V1	7789057xxx	A.21
PAC-CTLX-RV24-V0	7789031xxx	A.21
PAC-CTLX-RV24-V1	7789056xxx	A.21
PAC-CTLX-RV24-V2	7789153xxx	A.21
PAC-CTLX-RV24-V3	7789154xxx	A.21
PAC-CTLX-RV24-V4	7789155xxx	A.21
PAC-CTLX-RV36-V0	7789030xxx	A.21
PAC-CTLX-SD15-V0	7789033xxx	A.21
PAC-CTLX-SD15-V1	7789034xxx	A.21
PAC-CTLX-SD25-V0	7789035xxx	A.21
PAC-CTLX-SD25-V1	7789036xxx	A.21
PAC-CTLX-SD25-V2	7789037xxx	A.21
PAC-CTLX-SD25-V3	7789038xxx	A.21
PAC-CTLX-SD25-V4	7789156xxx	A.21
PAC-CTLX-SD25-V5	7789157xxx	A.21
PAC-CTLX-SD25-V6	7789158xxx	A.21
PAC-CTLX-SD25-V7	7789159xxx	A.21
PAC-CTLX-SD37-V0	7789032xxx	A.21
PAC-CTLX-UNIS-V0	7789732xxx	F.9
PAC-CTLX-UNIS-V1	7789734xxx	F.9
PAC-CTLX-UNIU-V0	7789731xxx	F.9
PAC-CTLX-UNIU-V1	7789733xxx	F.9
PAC-D15F-D15F-HF-1M	2426180010	F.4
PAC-D15F-F-HF-1M	2426030010	F.4
PAC-D15M-D15F-HF-1M	2426150010	F.5
PAC-D15M-D15M-HF-1M	2426070010	F.4
PAC-D15M-F-HF-1M	2425980010	F.4
PAC-D25F-D25F-HF-1M	2426120010	F.4
PAC-D25F-F-HF-1M	2426040010	F.4
PAC-D25M-D25F-HF-1M	2426160010	F.5
PAC-D25M-D25M-HF-1M	2426080010	F.4
PAC-D25M-F-HF-1M	2425990010	F.4
PAC-D37F-D37F-HF-1M	2426130010	F.4
PAC-D37F-F-HF-1M	2426050010	F.4
PAC-D37M-D37F-HF-1M	2426190010	F.5
PAC-D37M-D37M-HF-1M	2426090010	F.4
PAC-D37M-F-HF-1M	2426000010	F.4
PAC-D50F-D50F-HF-1M	2426140010	F.4
PAC-D50M-D50F-HF-1M	2426170010	F.5
PAC-D50M-D50M-HF-1M	2426100010	F.4
PAC-D9F-D9F-HF-1M	2426110010	F.4
PAC-D9F-F-HF-1M	2426020010	F.4
PAC-D9M-D9F-HF-1M	2420580010	F.5
PAC-D9M-D9M-HF-1M	2420570010	F.4
PAC-D9M-F-HF-1M	2420560010	F.4
PAC-ELCO 56-F56-F-1M	7789765010	F.8
PAC-ELC020-F20-F-1M	7789761010	F.8
PAC-ELC020-F20-F20-1M	7789760010	F.8
PAC-ELC038-F38-F-1M	7789763010	F.8
PAC-ELC038-F38-F38-1M	7789762010	F.8
PAC-ELC056-F32-F1M	7789774010	F.8
PAC-ELC056-F32-F32-1M	7789773010	F.8
PAC-ELC056-F54-F-1M	7789776010	F.8
PAC-ELC056-F54-F54-1M	7789775010	F.8
PAC-ELC056-F56-F56-1M	7789764010	F.8
PAC-EMDV-HE20-V0	7789700xxx	A.13
PAC-EMDV-HE20-V1	7789701xxx	A.13
PAC-EMDV-HE20-V2	7789702xxx	A.13
PAC-EMDV-HE20-V3	7789703xxx	A.13
PAC-EMDV-SD25-V0	7789704xxx	A.13
PAC-FJ24-F-0-XXXX	2435770xxx	F.9
PAC-FJ40-F-1M	1452610xxx	F.9
PAC-GF30-HE20-V0	7789066xxx	A.15
PAC-GF30-HE20-V1	7789067xxx	A.15
PAC-GF30-HE20-V2	7789068xxx	A.15
PAC-GF30-HE20-V3	7789069xxx	A.14
PAC-GF30-RV24-V1	7789061xxx	A.15
PAC-GF30-RV24-V3	7789063xxx	A.15
PAC-GF30-RV24-V4	7789064xxx	A.15
PAC-GF30-SD15-V0	7789075xxx	A.15
PAC-GF30-SD15-V1	7789076xxx	A.15
PAC-GF30-SD25-V0	7789072xxx	A.15
PAC-GF30-SD25-V1	7789073xxx	A.15
PAC-GF30-SD37-V0	7789074xxx	A.15
PAC-GF30-UNIS-V0-XXXX	2435760xxx	F.9
PAC-GF30-UNIU-V0	1378040xxx	F.9
PAC-HD15F-F-V0-1M	1440780010	F.6
PAC-HD15F-HD15F-V0-1M	1440750010	F.6
PAC-HD15M-F-V0-1M	1440810010	F.6
PAC-HD15M-HD15F-V0-1M	1440770010	F.7
PAC-HD15M-HD15M-V0-1M	1440740010	F.6
PAC-HD26F-F-V0-1M	2093080010	F.6
PAC-HD26F-HD26F-V0-1M	2094140010	F.6
PAC-HD26M-F-V0-1M	2093680010	F.6
PAC-HD26M-HD26F-V0-1M	2003420010	F.7
PAC-HD26M-HD26M-V0-1M	2094720010	F.6
PAC-HD44F-F-V0-1M	2093090010	F.6
PAC-HD44F-HD44F-V0-1M	2094180010	F.6
PAC-HD44M-F-V0-1M	2093910010	F.6
PAC-HD44M-HD44F-V0-1M	1989360010	F.7
PAC-HD44M-HD44M-V0-1M	2094730010	F.6
PAC-HD62F-HD62F-V0-1M	1988930010	F.6
PAC-HD62M-HD62F-V0-1M	2094800010	F.7
PAC-HD62M-HD62M-V0-1M	2094770010	F.6
PAC-HE10-F-HF-1M	2420540010	F.3
PAC-HE10-HE10-HF-1M	2420560010	F.3
PAC-HE14F-HF-1M	2425650010	F.3
PAC-HE14-HE14-HF-1M	2425940010	F.3
PAC-HE16-F-HF-1M	2425710010	F.3

Type	Order No.	Page	Type	Order No.	Page	Type	Order No.	Page
PACHE16-HE16-HF-1M	2425700010	F.3	PAC-RX3i-RV36-V3	7789696xxx	A.15	PAC-S300-SL24-AR0	2004620xxx	G.5
PAC-HE20-F-HF-1M	2425660010	F.3	PAC-RX3i-SD15-V0	7789620xxx	A.15	PAC-S300-SL24-AR1	2004630xxx	G.5
PAC-HE20-HE20-HF-1M	2425730010	F.3	PAC-RX3i-SD15-V1	7789624xxx	A.15	PAC-S300-SL24-AR2	2004650xxx	G.13
PAC-HE26-F-HF-1M	2425720010	F.3	PAC-RX3i-SD15-V2	7789668xxx	A.15	PAC-S300-SL24-AR3	2004660xxx	G.13
PAC-HE26-HE26-HF-1M	2425740010	F.3	PAC-RX3i-SD25-V0	7789625xxx	A.15	PAC-S300-SL24-AY2	2004640xxx	G.5
PAC-HE34-F-HF-1M	2425690010	F.3	PAC-RX3i-SD25-V1	7789667xxx	A.15	PAC-S300-SL46-AJ0-XXXX	2045970xxx	G.5
PAC-HE34-HE34-HF-1M	2425950010	F.3	PAC-RX3i-SD25-V2	7789621xxx	A.15	PAC-S300-SL46-AM0-XXXX	2045910xxx	G.5
PAC-HE40-F-HF-1M	2425680010	F.3	PAC-RX3i-SD25-V3	1373690xxx	A.15	PAC-S300-UNIS-V0	7789607xxx	F.9
PAC-HE40-HE40-HF-LLLM	2425960010	F.3	PAC-RX3i-SD25-V4	1373700xxx	A.15	PAC-S300-UNIS-V1	7789609xxx	F.9
PAC-HE50-HE50-HF-1M	2425970010	F.3	PAC-RX3i-SD37-V0	7789622xxx	A.15	PAC-S300-UNIU-V0	7789606xxx	F.9
PAC-M258-HE20-V0	7789840xxx	A.23	PAC-RX3i-SD37-V1	7789623xxx	A.15	PAC-S300-UNIU-V1	7789608xxx	F.9
PAC-M258-HE20-V1	7789857xxx	A.23	PAC-RX3i-SD37-V2	7789626xxx	A.15	PAC-S400-HE20-V0	7789290xxx	A.33
PAC-M258-HE20-V2	7789859xxx	A.23	PAC-RX3i-SD37-V3	7789798xxx	A.15	PAC-S400-HE20-V1	7789291xxx	A.33
PAC-M258-RV12-V0	7789854xxx	A.23	PAC-RX3i-SD37-V6	1338580xxx	A.15	PAC-S400-HE20-V2	7789292xxx	A.33
PAC-M258-RV12-V1	7789855xxx	A.23	PAC-RX3i-SD25-V4	2435780xxx	F.9	PAC-S400-RV12-V0	7789283xxx	A.33
PAC-M258-RV12-V2	7789858xxx	A.23	PAC-RX3i-UNIS-V0-XXXX	7789842xxx	F.9	PAC-S400-RV24-V0	7789273xxx	A.33
PAC-M258-SD15-V0	7789841xxx	A.23	PAC-S1200-HE20-V0	1329110xxx	A.34	PAC-S400-RV36-V0	7789270xxx	A.33
PAC-M340-HE20-V0	7789387xxx	A.24	PAC-S1200-HE20-V1	1329120xxx	A.34	PAC-S400-RV36-V2	7789278xxx	A.33
PAC-M340-HE20-V1	7789380xxx	A.24	PAC-S1200-HE20-V2	1329150xxx	A.34	PAC-S400-SD25-V0	7789285xxx	A.33
PAC-M340-HE20-V2	7789386xxx	A.24	PAC-S1200-HE20-V3	1329170xxx	A.34	PAC-S400-SD25-V3	7789288xxx	A.33
PAC-M340-HE20-V3	7789630xxx	A.24	PAC-S1200-HE20-V4	1329180xxx	A.34	PAC-S400-SD25-V4-LLLM	2062360xxx	A.33
PAC-M340-HE40-V0-XXXX	1479600xxx	A.24	PAC-S1200-HE20-V5	1329200xxx	A.34	PAC-S400-SD25-V5-LLLM	2062380xxx	A.33
PAC-M340-HERV-V0	7789635xxx	A.24	PAC-S1200-HE20-V6	1329230xxx	A.34	PAC-S400-SD37-V0	7789284xxx	A.33
PAC-M340-RV24-V0	7789382xxx	A.24	PAC-S1200-HE20-V7	1329240xxx	A.34	PAC-S400-UNIS-V0-XXXX	1504020xxx	F.9
PAC-M340-RV24-V1	7789383xxx	A.24	PAC-S1200-RV12-V0	1329130xxx	A.34	PAC-S400-UNIU-V0-XXXX	1504000xxx	F.9
PAC-M340-RV24-V2	7789633xxx	A.24	PAC-S1200-RV12-V1	1329190xxx	A.34	PAC-S7300-HE20-V18	1431530xxx	A.31
PAC-M340-RV24-V3	7789384xxx	A.24	PAC-S1200-RV24-V0	1329140xxx	A.34	PAC-SLC5-HE20-V4	7789005xxx	A.22
PAC-M340-SD15-V0	7789637xxx	A.24	PAC-S1200-RV24-V1	1329210xxx	A.34	PAC-SLC5-HE20-V5	7789006xxx	A.22
PAC-M340-SD15-V1	7789638xxx	A.24	PAC-S1200-SD15-V0	1329250xxx	A.34	PAC-SLC5-HE20-V6	7789670xxx	A.22
PAC-M340-SD15-V2	7789640xxx	A.24	PAC-S1200-SD15-V1	1329280xxx	A.34	PAC-TW00-HE20-V0	7789326xxx	A.28
PAC-M340-SD15-V3	7789628xxx	A.24	PAC-S1200-SD25-V0	1329270xxx	A.34	PAC-TW00-HE20-V1	7789327xxx	A.28
PAC-M340-SD15-V4	7789629xxx	A.24	PAC-S1200-SD25-V1	1329300xxx	A.34	PAC-TW00-HE20-V2	7789328xxx	A.28
PAC-M340-SD25-V0	7789846xxx	A.24	PAC-S1200-SD25-V2	1329290xxx	A.34	PAC-TW00-HE20-V3	7789329xxx	A.28
PAC-M340-SD25-V1	7789847xxx	A.24	PAC-S1500-40P-05-XXXX	2000150xxx	F.9	PAC-UNIV-D15F-D15F-1M	1349890010	F.4
PAC-M340-SD37-V0	7789639xxx	A.24	PAC-S1500-HE20-V0	1462040xxx	G.13	PAC-UNIV-D15F-F	1350480xxx	A.29
PAC-M340-UNIS-V0-XXXX	2426750xxx	F.9	PAC-S1500-HE20-V1	1462090xxx	G.13	PAC-UNIV-D15F-F-1M	1350480010	F.4
PAC-M340-UNIS-V1-XXXX	2426760xxx	F.9	PAC-S1500-HE20-V2	1462100xxx	G.13	PAC-UNIV-D15M-D15F-1M	1349970010	F.5
PAC-M340-UNIU-V0	1356950xxx	F.9	PAC-S1500-HE20-V3	1462110xxx	A.35	PAC-UNIV-D15M-D15M-1M	1349780010	F.4
PAC-MICR-HE20-V0	7789312xxx	A.25	PAC-S1500-HE20-V4-XXXX	1994500xxx	A.35	PAC-UNIV-D15M-F-1M	1350420010	F.4
PAC-MICR-HE20-V1	7789313xxx	A.25	PAC-S1500-RV24-V0	1462130xxx	A.35	PAC-UNIV-D25F-D25F-1M	1349920010	F.4
PAC-MICR-HE20-V2	7789314xxx	A.25	PAC-S1500-RV24-V1	1462140xxx	A.35	PAC-UNIV-D25F-F	1350490xxx	A.29
PAC-MICR-HE20-V3	7789834xxx	A.25	PAC-S1500-SD15-V0	1462150xxx	A.35	PAC-UNIV-D25F-F-1M	1350490010	F.4
PAC-MICR-RV12-V0	7789307xxx	A.25	PAC-S1500-SD15-V1	1462160xxx	A.35	PAC-UNIV-D25M-D25F	1349980xxx	A.26
PAC-MICR-RV24-V0	7789308xxx	A.25	PAC-S1500-SD25-V0	1462170xxx	A.35	PAC-UNIV-D25M-D25F-1M	1349980010	F.5
PAC-MICR-RV24-V1	7789331xxx	A.25	PAC-S1500-SD25-V3	1991700xxx	A.35	PAC-UNIV-D25M-D25M-1M	1349800010	F.4
PAC-MICR-RV36-V0	7789330xxx	A.25	PAC-S1500-SD25-V4	1991710xxx	A.35	PAC-UNIV-D25M-F	1350430xxx	F.9
PAC-MICR-SD15-V0	7789309xxx	A.25	PAC-S1500-SD37-V0	1462200xxx	A.35	PAC-UNIV-D25M-F-1M	1350430010	F.4
PAC-MICR-SD15-V1	7789310xxx	A.25	PAC-S1500-SD37-V2	1991720xxx	A.35	PAC-UNIV-D37F-D37F-1M	1349930010	F.4
PAC-MICR-SD25-V0	7789311xxx	A.25	PAC-S1500-SL20-AR0	2004590xxx	G.9	PAC-UNIV-D37F-F	1350500xxx	A.13
PAC-MIMQ-HE20-V0	7789681xxx	A.17	PAC-S1500-SL20-AY0	2004600xxx	G.9	PAC-UNIV-D37F-F-1M	1350500010	F.4
PAC-MIMQ-HE20-V1	7789683xxx	A.17	PAC-S1500-SL24-AR0	2004610xxx	G.13	PAC-UNIV-D37M-D37F-1M	1349990010	F.5
PAC-MIMQ-HE20-V2	7789708xxx	A.17	PAC-S1500-SL24-AR1	2004530xxx	G.5	PAC-UNIV-D37M-D37M-1M	1349830010	F.4
PAC-MIMQ-SD25-V0	7789684xxx	A.17	PAC-S1500-SL24-AY0-XXXX	2004540xxx	G.5	PAC-UNIV-D37M-F-1M	1350440010	F.4
PAC-MIMQ-SD25-V1	7789685xxx	A.17	PAC-S1500-UNIS-V0	1466240xxx	F.9	PAC-UNIV-D50F-D50F-1M	1349940010	F.4
PAC-MIMQ-SD25-V2	7789710xxx	A.17	PAC-S1500-UNIU-V0	1466230xxx	F.9	PAC-UNIV-D50F-F-1M	1350520010	F.4
PAC-MIMQ-SD25-V3	7789711xxx	A.17	PAC-S300-20-05-F	1323930xxx	F.9	PAC-UNIV-D50M-D50F-1M	1350000010	F.5
PAC-MIMQ-SD37-V0	7789682xxx	A.17	PAC-S300-40-05-F	1323960xxx	F.9	PAC-UNIV-D50M-D50M-1M	1349850010	F.4
PAC-MIMQ-SD37-V1	7789709xxx	A.17	PAC-S300-HE20-S-V0	7788901xxx	A.31	PAC-UNIV-D50M-F-1M	1350450010	F.4
PAC-PREM-HE20-V0	7789322xxx	G.14	PAC-S300-HE20-U-V0-LLLM	2183160xxx	A.30	PAC-UNIV-D9F-D9F-1M	1349870010	F.4
PAC-PREM-RV12-V0	7789317xxx	A.26	PAC-S300-HE20-V0	7789192xxx	A.30	PAC-UNIV-D9F-F-1M	1350470010	F.4
PAC-PREM-RV24-V0	7789315xxx	A.26	PAC-S300-HE20-V10	7789729xxx	A.30	PAC-UNIV-D9M-D9F-1M	1349950010	F.5
PAC-PREM-RV24-V1	7789316xxx	A.26	PAC-S300-HE20-V11	7789730xxx	A.30	PAC-UNIV-D9M-D9M-1M	1349750010	F.4
PAC-PREM-RV24-V2	7789318xxx	A.26	PAC-S300-HE20-V16	7789830xxx	A.30	PAC-UNIV-D9M-F-1M	1350400010	F.4
PAC-PREM-SD15-V0	7789320xxx	A.26	PAC-S300-HE20-V2	7789222xxx	A.32	PAC-UNIV-F120-F-XXXX	1405070xxx	F.9
PAC-PREM-SD15-V1	7789321xxx	A.26	PAC-S300-HE20-V3	7789234xxx	G.13	PAC-UNIV-HE10-F-1M	1349730010	F.3
PAC-PREM-SD25-V0	7789261xxx	A.26	PAC-S300-HE20-V4	7789236xxx	G.13	PAC-UNIV-HE10-HE10-1M	1349630010	F.3
PAC-PREM-SD25-V1	7789319xxx	A.26	PAC-S300-HE20-V5	7789237xxx	A.30	PAC-UNIV-HE14-F-1M	1349740010	F.3
PAC-PREM-SL24-AY0-XXXX	2004680xxx	G.14	PAC-S300-HE20-V6	7789239xxx	A.30	PAC-UNIV-HE14-HE14-1M	1349640010	F.3
PAC-PREM-SL24-AY1-XXXX	2004690xxx	G.14	PAC-S300-HE20-V7	7789246xxx	A.30	PAC-UNIV-HE16-F-1M	1349770010	F.3
PAC-PREM-SL24-AY2-XXXX	2004670xxx	G.6	PAC-S300-HE40-S-V0	7789759xxx	A.31	PAC-UNIV-HE16-HE16-1M	1349650010	F.3
PAC-PREM-UNIS-V0-XXXX	2426770xxx	F.9	PAC-S300-HE40-U-V0-LLLM	2183170xxx	A.30	PAC-UNIV-HE20-1:1	7789301xxx	G.14
PAC-PREM-UNIU-V0	7789827xxx	F.9	PAC-S300-HESD-V0	7789223xxx	A.32	PAC-UNIV-HE20-F	1349790xxx	F.9
PAC-QTUM-HE20-V0	7789119xxx	A.27	PAC-S300-RV12-V0	7789191xxx	A.30	PAC-UNIV-HE20-F	7789100xxx	A.29
PAC-QTUM-HE20-V1	7789120xxx	A.27	PAC-S300-RV12-V1	7789219xxx	A.30	PAC-UNIV-HE20-F-1M	1349790010	F.3
PAC-QTUM-HE20-V2	7789121xxx	A.27	PAC-S300-RV24-V0	7789190xxx	A.30	PAC-UNIV-HE20-HE20	1349670xxx	G.13
PAC-QTUM-HE20-V3	7789133xxx	A.27	PAC-S300-RV24-V1	7789210xxx	A.30	PAC-UNIV-HE20-HE20-1M	1349670010	F.3
PAC-QTUM-RV24-V3	7789113xxx	A.27	PAC-S300-RV24-V2	7789211xxx	A.30	PAC-UNIV-HE26-F-1M	1349820010	F.3
PAC-QTUM-RV36-V0	7789118xxx	A.27	PAC-S300-RV24-V3	7789212xxx	A.30	PAC-UNIV-HE26-HE26-1M	1349680010	F.3
PAC-QTUM-SD15-V0	7789124xxx	A.27	PAC-S300-RV24-V4	7789214xxx	A.30	PAC-UNIV-HE34-F-1M	1349840010	F.3
PAC-QTUM-SD25-V0	7789125xxx	A.27	PAC-S300-RV36-V0	7789215xxx	A.30	PAC-UNIV-HE34-HE34-1M	1349690010	F.3
PAC-QTUM-SD25-V1	7789126xxx	A.27	PAC-S300-SD15-V0	7789193xxx	A.31	PAC-UNIV-HE40-F	1349880xxx	F.9
PAC-QTUM-SD25-V2	7789134xxx	A.27	PAC-S300-SD15-V1	7789224xxx	A.31	PAC-UNIV-HE40-F-1M	1349880010	F.3
PAC-QTUM-SD25-V3	7789135xxx	A.27	PAC-S300-SD15-V2	7789227xxx	A.31	PAC-UNIV-HE40-HE40-1M	1349700010	F.3
PAC-QTUM-SD25-V4	7789136xxx	A.27	PAC-S300-SD15-V3	7789228xxx	A.31	PAC-UNIV-HE50-HE50-1M	1349720010	F.3
PAC-QTUM-SD25-V5	7789137xxx	A.27	PAC-S300-SD15-V4	7789195xxx	A.31	PAC-UNIV-RV12-F	7789108xxx	A.29
PAC-QTUM-SD37-V0	7789123xxx	A.27	PAC-S300-SD25-V0	7789194xxx	A.31	PAC-UNIV-RV24-F	7789104xxx	A.29
PAC-RCKW-HE20-V0	1489160xxx	A.20	PAC-S300-SD25-V1	7789229xxx	A.31	PAC-UNIV-RV36-F	7789106xxx	A.22
PAC-RCKW-HE20-V1	1489170xxx	A.20	PAC-S300-SD25-V2	7789230xxx	A.31	PAC-XIOC-HE20-V0	7789862xxx	A.18
PAC-RCKW-HE20-V2	1489180xxx	A.20	PAC-S300-SD25-V3	7789233xxx	A.31	PAC-XIOC-HE20-V1	7789863xxx	A.18
PAC-RX3i-HE20-V0	7789618xxx	A.15	PAC-S300-SD25-V4	7789196xxx	A.31	PAC-XIOC-HE20-V2	7789865xxx	A.18
PAC-RX3i-HE20-V1	7789619xxx	A.15	PAC-S300-SD25-V5	7789800xxx	A.31	PAC-XIOC-HE20-V3	7789866xxx	A.18
PAC-RX3i-HE40-V0	1419430xxx	A.15	PAC-S300-SD37-V0	7789225xxx	A.31	PAC-XIOC-HE20-V4	7789872xxx	A.18
PAC-RX3i-RV12-V0	7789634xxx	A.15	PAC-S300-SD37-V1	7789226xxx	A.31	PAC-XIOC-RV24-V0	7789864xxx	A.18
PAC-RX3i-RV24-V0	7789666xxx	A.15	PAC-S300-SD37-V2	7789231xxx	A.31	PAC-XIOC-RV24-V1	7789871xxx	A.18
PAC-RX3i-RV24-V1	7789669xxx	A.15	PAC-S300-SD37-V3	7789604xxx	A.31	PAC-XIOC-SD15-V0	7789868xxx	A.18
PAC-RX3i-RV24-V2	7789636xxx	A.15	PAC-S300-SL20-AR0	2004880xxx	G.9	PAC-XIOC-SD15-V1	7789870xxx	A.18
PAC-RX3i-RV36-V0	7789631xxx	A.15	PAC-S300-SL20-AR1	2004870xxx	G.9	PAC-XIOC-SD25-V0	7789867xxx	A.18
PAC-RX3i-RV36-V1	7789632xxx	A.15	PAC-S300-SL20-AY0	2004860xxx	G.9	PAC-XIOC-SD25-V1	7789869xxx	A.18
PAC-RX3i-RV36-V2	7789665xxx	A.15	PAC-S300-SL20-AY1	2004850xxx	G.9	PAC-YOK-MIL40-F-1M	2420520010	C.26

Type	Order No.	Page
PAC-YOK-MIL40-V0-1M	1536840010	C.26
PAC-YOK-MIL50-F-1M	2420530010	C.26
PAC-YOK-MIL50-V0-1M	1536820010	C.26
PS 2.0 MC	0310000000	C.20

R

RS 1210 2W L H S	9445630000	A.40
RS 810 2W R S	9441540000	A.39
RS 810 2W L H S	9445530000	A.38
RS 16A10 DP SD S	9448020000	A.60
RS 16A10 DP SD Z	1308270000	A.60
RS 16A10 HM-DP SD S	9448120000	A.60
RS 16A10 HM-DP SD Z	1308280000	A.60
RS 1610 1W H S	9445700000	A.41
RS 1610 1W R S	9441500000	A.48
RS 1610 1W H Z	1311750000	A.41
RS 1610 1W I R S	9441860000	A.48
RS 1610 1W L H S	9445810000	A.42
RS 1610 1W L H Z	1311780000	A.42
RS 1610 1W L H S	9445710000	A.41
RS 1610 1W L H Z	1311770000	A.41
RS 1610 2W H S	9445720000	A.43
RS 1610 2W R S	9441700000	A.49
RS 1610 2W F H S	9445820000	A.46
RS 1610 2W F H Z	1311840000	A.46
RS 1610 2W F R S	9441560000	A.49
RS 1610 2W F L H S	1311850000	A.46
RS 1610 2W F L H Z	1311870000	A.46
RS 1610 2W H Z	1311790000	A.43
RS 1610 2W I H S	1311810000	A.44
RS 1610 2W I H Z	1311820000	A.44
RS 1610 2W L H 2H S	1431700000	A.45
RS 1610 2W L H S	9445750000	A.44
RS 1610 2W L H Z	1311830000	A.44
RS 1610 2W L H S	9445730000	A.43
RS 1610 2W L H Z	1311800000	A.43
RS 1610 3W H S	9445760000	A.47
RS 1610 3W H Z	1311880000	A.47
RS 1610 3W I R S	9441600000	A.50
RS 1610 3W L H S	9445770000	A.47
RS 1610 3W L H Z	1311890000	A.47
RS 3210 1W R S	9441510000	A.51
RS 3210 1W I R S	9441870000	A.51
RS 3210 2W R S	9441710000	A.52
RS 3210 2W F R S	9441570000	A.52
RS 3210 3W I R S	9441610000	A.53
RS 4A10 DP SD S	9448000000	A.56
RS 4A10 DP SD Z	1308230000	A.56
RS 4A10 DP-M258 SD S	1289090000	A.57
RS 4A10 HM-DP SD S	9448100000	A.56
RS 4A10 HM-DP SD Z	1308240000	A.56
RS 8A1 PREM/APR SD S	9448030000	A.59
RS 8A11A0 MICRO SD S	9448040000	A.59
RS 8A10 DP SD S	9448010000	A.58
RS 8A10 DP SD Z	1308250000	A.58
RS 8A10 HM-DP SD S	9448110000	A.58
RS 8A10 HM-DP SD Z	9449110000	A.58
RS ELCO 20/20LM S	1126630000	D.12
RS ELCO 20/20LM Z	1126640000	D.12
RS ELCO 20/20RM S	1126610000	D.12
RS ELCO 20/20RM Z	1126620000	D.12
RS ELCO 38/38LM S	1126670000	D.12
RS ELCO 38/38LM Z	1126680000	D.12
RS ELCO 38/38RM S	1126650000	D.12
RS ELCO 38/38RM Z	1126660000	D.12
RS ELCO 56/32LM S	1126710000	D.12
RS ELCO 56/32LM Z	1126720000	D.12
RS ELCO 56/32RM S	1126690000	D.12
RS ELCO 56/32RM Z	1126700000	D.12
RS ELCO 56/54LM S	1126750000	D.12
RS ELCO 56/54LM Z	1126760000	D.12
RS ELCO 56/54RM S	1126730000	D.12
RS ELCO 56/54RM Z	1126740000	D.12
RS ELCO 56/56LM S	1126790000	D.12
RS ELCO 56/56LM Z	1126800000	D.12
RS ELCO 56/56RM S	1126770000	D.12
RS ELCO 56/56RM Z	1126780000	D.12
RS ELCO 90/90LM S	1126870000	D.13
RS ELCO 90/90LM Z	1126880000	D.13
RS ELCO 90/90RM S	1126810000	D.13
RS ELCO 90/90RM Z	1126820000	D.13
RS ELCOF 20/20LM S	1480750000	D.14
RS ELCOF 20/20RM S	1480740000	D.14
RS ELCOF 38/38LM S	1480770000	D.14
RS ELCOF 38/38RM S	1480760000	D.14
RS ELCOF 56/56LM S	1480790000	D.14
RS ELCOF 56/56RM S	1480780000	D.14
RS F10 LP2N 5/10	0224961001	D.6
RS F10 LP3R 3/12	8012850000	D.7
RS F10 LPK 2H/12	8155610000	D.7
RS F10 Z	8537190000	D.6
RS F14 LP2N 5/14	0225061001	D.6
RS F14 LP3R 3/14	8012860000	D.7
RS F14 LPK 2H/16	8258980000	D.7
RS F14 Z	8537200000	D.6
RS F16 LP2N 5/16	0225161001	D.6
RS F16 LP3R 3/18	8012870000	D.7
RS F16 LPK 2H/18	8265540000	D.7

RS F20 LP2N 5/20	0224261001	D.6
RS F20 LP3R 3/21	8012910000	D.7
RS F20 LPK 2H/22	8155600000	D.7
RS F20 X3 IN	1461210000	G.30
RS F20 X3 OUT	1461220000	G.30
RS F20 Z	8537110000	D.6
RS F26 LP2N 5/26	0224861001	D.6
RS F26 LP3R 3/27	8012920000	D.7
RS F26 LPK 2H/28	8213470000	D.7
RS F26 Z	8537180000	D.6
RS F34 LP2N 5/34	0224361001	D.6
RS F34 LP3R 3/36	8012930000	D.7
RS F34 LPK 2H/36	8155590000	D.7
RS F34 Z	8537130000	D.6
RS F40 LP2N 5/40	0224461001	D.6
RS F40 LP3R 3/42	8012940000	D.7
RS F40 LPK 2H/42	8155580000	D.7
RS F40 Z	8537140000	D.6
RS F50 LP2N 5/50	0224561001	D.6
RS F50 LP3R 3/51	8012950000	D.7
RS F50 LPK 2H/52	8155570000	D.7
RS F50 Z	8537150000	D.6
RS F60 LP2N 5/60	0224661001	D.6
RS F60 LP3R 3/63	8012960000	D.7
RS F60 LPK 2H/62	8259000000	D.7
RS F64 LP2N 5/64	0224761001	D.6
RS F64 LP3R 3/66	8012970000	D.7
RS F64 LPK 2H/66	8155560000	D.7
RS LPK3/144 VERT	8199510000	D.19
RS RJ45	8611320000	D.11
RS RJ45 2WAY	8555440000	D.11
RS SD15 BZ	8537400000	D.8
RS SD15 SZ	8537390000	D.8
RS SD15B LP3R	8019890000	D.9
RS SD15B UNC 4.40 LP2N	8005211001	D.8
RS SD15B UNC LPK2	8209730000	D.9
RS SD15F HD UNC4.40 S	1428130000	D.10
RS SD15M HD UNC4.40 S	1428080000	D.10
RS SD15S LP3R	8019940000	D.9
RS SD15S UNC 4.40 LP2N	8005201001	D.8
RS SD15S UNC LPK2	8233350000	D.9
RS SD25 BZ	8537380000	D.8
RS SD25 SZ	8537370000	D.8
RS SD25B LP3R	8019900000	D.9
RS SD25B UNC 4.40 LP2N	8005191001	D.8
RS SD25B UNC LPK2	8155620000	D.9
RS SD25S LP3R	8019950000	D.9
RS SD25S UNC 4.40 LP2N	8005181001	D.8
RS SD25S UNC LPK2	8155650000	D.9
RS SD26F HD UNC4.40 S	1428140000	D.10
RS SD26M HD UNC4.40 S	1428090000	D.10
RS SD37 BZ	8537250000	D.8
RS SD37 SZ	8537240000	D.8
RS SD37B LP3R	8019910000	D.9
RS SD37B UNC 4.40 LP2N	8003891001	D.8
RS SD37B UNC LPK2	8155630000	D.9
RS SD37S LP3R	8019960000	D.9
RS SD37S UNC 4.40 LP2N	8003881001	D.8
RS SD37S UNC LPK2	8155660000	D.9
RS SD44F HD UNC4.40 S	1428150000	D.10
RS SD44M HD UNC4.40 S	1428110000	D.10
RS SD50 BZ	8537360000	D.8
RS SD50 SZ	8537350000	D.8
RS SD50B LP3R	8019920000	D.9
RS SD50B UNC 4.40 LP2N	8005171001	D.8
RS SD50B UNC LPK2	8155640000	D.9
RS SD50S LP3R	8019870000	D.9
RS SD50S UNC 4.40 LP2N	8005161001	D.8
RS SD50S UNC LPK2	8155670000	D.9
RS SD62F HD UNC4.40 S	1428160000	D.10
RS SD62M HD UNC4.40 S	1428120000	D.10
RS SD9 BZ	8537320000	D.8
RS SD9 SZ	8537260000	D.8
RS SD9B LP3R	8019880000	D.9
RS SD9B UNC 4.40 LP2N	8003911001	D.8
RS SD9B UNC LPK2	8216480000	D.9
RS SD9S LP3R	8019930000	D.9
RS SD9S UNC 4.40 LP2N	8003901001	D.8
RS SD9S UNC LPK2	8259010000	D.9
RS VERT 4P 20X4 S	1128100000	D.20
RS VERT 4P 20X4 Z	1128110000	D.20
RS VERT 6P 12X6 S	1128120000	D.20
RS VERT 6P 12X6 Z	1128130000	D.20
RS VERT16 LPK2	8234620000	D.18
RS VERT8 LPK2	8252010000	D.18
RSD 10 LP/LP	8022901001	D.21
RSD 12 LP/LP	0181461001	D.21
RSD 20 LP/LP	8022911001	D.21
RSD 40 LP/LP	8022921001	D.21
RSD A10 LP/LP	1312760000	D.21
RSD A20 LP/LP	1312780000	D.21
RSD A22 LP/LP	0180961001	D.21
RSD A5 LP/LP	1312740000	D.21
RSD K10 LP/LP	1312770000	D.21
RSD K20 LP/LP	1312790000	D.21
RSD K22 LP/LP	0181061001	D.21
RSD K5 LP/LP	1312750000	D.21
RSM-12 C 1CO S	9445060000	A.74
RSM-12 PLC C 1CO S	1289110000	A.73

Type	Order No.	Page
RSM-16 FOR 1CO S	9445140000	A.82
RSM-16 FUS 1CO S	9445120000	A.81
RSM-16 FUS 1CO Z	9447120000	A.81
RSM-16 115VAC/DC 1CO S	1448390000	E.10
RSM-16 115VAC/DC 1CO Z	1448400000	E.10
RSM-16 115VAC/DC 2CO S	1449330000	E.10
RSM-16 115VAC/DC 2CO Z	1449340000	E.10
RSM-16 12V- 1CO S	1448240000	E.10
RSM-16 12V- 1CO Z	1448270000	E.10
RSM-16 12V- 2CO S	1449180000	E.10
RSM-16 12V- 2CO Z	1449200000	E.10
RSM-16 12V+ 1CO S	1448230000	E.10
RSM-16 12V+ 1CO Z	1448250000	E.10
RSM-16 12V+ 2CO S	1449170000	E.10
RSM-16 12V+ 2CO Z	1449190000	E.10
RSM-16 230VAC 1CO S	1448410000	E.10
RSM-16 230VAC 1CO Z	1448420000	E.10
RSM-16 230VAC 2CO S	1449350000	E.10
RSM-16 230VAC 2CO Z	1449370000	E.10
RSM-16 24V- 1CO S	1448290000	E.10
RSM-16 24V- 1CO Z	1448310000	E.10
RSM-16 24V- 2CO S	1449220000	E.10
RSM-16 24V- 2CO Z	1449250000	E.10
RSM-16 24V+ 1CO S	1448280000	E.10
RSM-16 24V+ 1CO Z	1448300000	E.10
RSM-16 24V+ 2CO S	1449210000	E.10
RSM-16 24V+ 2CO Z	1449230000	E.10
RSM-16 24V+ BASE S	1448480000	E.10
RSM-16 24V+ BASE Z	1448490000	E.10
RSM-16 24VAC/DC 1CO S	1448370000	E.10
RSM-16 24VAC/DC 1CO Z	1448380000	E.10
RSM-16 24VAC/DC 2CO S	1449310000	E.10
RSM-16 24VAC/DC 2CO Z	1449320000	E.10
RSM-16 24VDC 1NO + C S	1448450000	A.84
RSM-16 24VDC 1NO + C Z	1448470000	A.84
RSM-16 48V- 1CO S	1448330000	E.10
RSM-16 48V- 1CO Z	1448350000	E.10
RSM-16 48V- 2CO S	1449280000	E.10
RSM-16 48V- 2CO Z	1449300000	E.10
RSM-16 48V+ 1CO S	1448320000	E.10
RSM-16 48V+ 1CO Z	1448340000	E.10
RSM-16 48V+ 2CO S	1449270000	E.10
RSM-16 48V+ 2CO Z	1449290000	E.10
RSM-16 C 1CO S	9445100000	A.79
RSM-16 C 1CO Z	9447100000	A.79
RSM-16 PLC C SW 1CO S	1129030000	A.76
RSM-16 PLC C SW 1CO Z	1129040000	A.76
RSM-16 PLC I 1CO 2H S	1431720000	A.83
RSM-16 PLC SW 1CO S	1129120000	A.78
RSM-16 PLC SW 1CO Z	1129130000	A.78
RSM-16D1 24VDC S	1312000000	A.62
RSM-16D1 24VDC Z	1312010000	A.62
RSM-16D1 48VDC S	1312020000	A.63
RSM-16D1 48VDC Z	1312030000	A.63
RSM161 24V+ 1CO S	1448540000	E.10
RSM-161 24V+ 2CO S	1449380000	E.10
RSM-161 24V+ 2CO Z	1449390000	E.10
RSM161 24V+1CO Z	1448550000	E.10
RSM-4 115VAC/DC 1CO S	1447570000	E.6
RSM-4 115VAC/DC 1CO Z	1447580000	E.6
RSM-4 115VAC/DC 2CO S	1448780000	E.6
RSM-4 115VAC/DC 2CO Z	1448790000	E.6
RSM-4 12V- 1CO S	1447410000	E.6
RSM-4 12V- 1CO Z	1447430000	E.6
RSM-4 12V- 2CO S	1448620000	E.6
RSM-4 12V- 2CO Z	1448640000	E.6
RSM-4 12V+ 1CO S	1447400000	E.6
RSM-4 12V+ 1CO Z	1447420000	E.6
RSM-4 12V+ 2CO S	1448610000	E.6
RSM-4 12V+ 2CO Z	1448630000	E.6
RSM-4 230VAC 1CO S	1447600000	E.6
RSM-4 230VAC 1CO Z	1447610000	E.6
RSM-4 230VAC 2CO S	1448800000	E.6
RSM-4 230VAC 2CO Z	1448810000	E.6
RSM-4 24V- 1CO S	1447450000	E.6
RSM-4 24V- 1CO Z	1447480000	E.6
RSM-4 24V- 2CO S	1448670000	E.6
RSM-4 24V- 2CO Z	1448690000	E.6
RSM-4 24V+ 1CO S	1447440000	E.6
RSM-4 24V+ 1CO Z	1447470000	E.6
RSM-4 24V+ 2CO S	1448650000	E.6
RSM-4 24V+ 2CO Z	1448680000	E.6
RSM-4 24V+ BASE S	1457430000	E.6
RSM-4 24V+ BASE Z	1457440000	E.6
RSM-4 24VAC/DC 1CO S	1447540000	E.6
RSM-4 24VAC/DC 1CO Z	1447550000	E.6
RSM-4 24VAC/DC 2CO S	1448740000	E.6
RSM-4 24VAC/DC 2CO Z	1448770000	E.6
RSM-4 48V- 1CO S	1447510000	E.6
RSM-4 48V- 1CO Z	1447530000	E.6
RSM-4 48V- 2CO S	1448710000	E.6
RSM-4 48V- 2CO Z	1448730000	E.6
RSM-4 48V+ 1CO S	1447500000	E.6
RSM-4 48V+ 1CO Z	1447520000	E.6
RSM-4 48V+ 2CO S	1448700000	E.6
RSM-4 48V+ 2CO Z	1448720000	E.6
RSM-41 24V+ 1CO S	1447740000	E.6
RSM-41 24V+ 1CO Z	1447750000	E.6
RSM-41 24V+ 2CO S	1448820000	E.6

Type	Order No.	Page
RSM-4I 24V+ 2C0 Z	1448830000	E.6
RSM-8 115VAC/DC 1C0 S	1447980000	E.8
RSM-8 115VAC/DC 1C0 Z	1447990000	E.8
RSM-8 115VAC/DC 2C0 S	1449050000	E.8
RSM-8 115VAC/DC 2C0 Z	1449070000	E.8
RSM-8 12V- 1C0 S	1447830000	E.8
RSM-8 12V- 1C0 Z	1447850000	E.8
RSM-8 12V- 2C0 S	1448900000	E.8
RSM-8 12V- 2C0 Z	1448920000	E.8
RSM-8 12V+ 1C0 S	1447820000	E.8
RSM-8 12V+ 1C0 Z	1447840000	E.8
RSM-8 12V+ 2C0 S	1448890000	E.8
RSM-8 12V+ 2C0 Z	1448910000	E.8
RSM-8 230VAC 1C0 S	1448000000	E.8
RSM-8 230VAC 1C0 Z	1448010000	E.8
RSM-8 230VAC 2C0 S	1449080000	E.8
RSM-8 230VAC 2C0 Z	1449090000	E.8
RSM-8 24V- 1C0 S	1447880000	E.8
RSM-8 24V- 1C0 Z	1447900000	E.8
RSM-8 24V- 2C0 S	1448940000	E.8
RSM-8 24V- 2C0 Z	1448970000	E.8
RSM-8 24V+ 1C0 S	1447870000	E.8
RSM-8 24V+ 1C0 Z	1447890000	E.8
RSM-8 24V+ 2C0 S	1448930000	E.8
RSM-8 24V+ 2C0 Z	1448950000	E.8
RSM-8 24V+ BASE S	1457370000	E.8
RSM-8 24V+ BASE Z	1457380000	E.8
RSM-8 24VAC/DC 1C0 S	1447950000	E.8
RSM-8 24VAC/DC 1C0 Z	1447970000	E.8
RSM-8 24VAC/DC 2C0 S	1449030000	E.8
RSM-8 24VAC/DC 2C0 Z	1449040000	E.8
RSM-8 24VDC 1N0 + C S	1457390000	A.70
RSM-8 24VDC 1N0 + C Z	1457400000	A.70
RSM-8 48V- 1C0 S	1447920000	E.8
RSM-8 48V- 1C0 Z	1447940000	E.8
RSM-8 48V- 2C0 S	1448990000	E.8
RSM-8 48V- 2C0 Z	1449020000	E.8
RSM-8 48V+ 1C0 S	1447910000	E.8
RSM-8 48V+ 1C0 Z	1447930000	E.8
RSM-8 48V+ 2C0 S	1448980000	E.8
RSM-8 48V+ 2C0 Z	1449010000	E.8
RSM-8 C 1C0 S	9445000000	A.68
RSM-8 C 1C0 Z	9447000000	A.68
RSM-8 PLC C SW 1C0 S	1128990000	A.67
RSM-8 PLC C SW 1C0 Z	1129000000	A.67
RSM-8H 24V- 1C0 S	1464800000	A.72
RSM-8H 24V- 1C0 Z	1464810000	A.72
RSM-8H 24V+ 1C0 S	1464780000	A.69
RSM-8H 24V+ 1C0 Z	1464790000	A.69
RSM-8I 24V+ 1C0 S	1448140000	E.8
RSM-8I 24V+ 1C0 Z	1448170000	E.8
RSM-8I 24V+ 2C0 S	1449100000	E.8
RSM-8I 24V+ 2C0 Z	1449110000	E.8
RSMS-16 12V- 1C0 S	1457000000	E.15
RSMS-16 12V- 1C0 Z	1457090000	E.15
RSMS-16 12V+ 1C0 Z	1457040000	E.15
RSMS-16 24V- 1C0 S	1457010000	E.15
RSMS-16 24V- 1C0 Z	1457100000	E.15
RSMS-16 24V+ 1C0 S	1456970000	E.15
RSMS-16 24V+ 1C0 Z	1457050000	E.15
RSMS-16 24V+ BASE S	1457170000	E.15
RSMS-16 24V+ BASE Z	1457180000	E.15
RSMS-16 24VAC/DC 1C0 S	1457190000	E.15
RSMS-16 24VAC/DC 1C0 Z	1457210000	E.15
RSMS-16 24VUC AU 1C0 S	1457200000	E.15
RSMS-16 24VUC AU 1C0 Z	1457220000	E.15
RSMS-16 48V- 1C0 S	1457020000	E.15
RSMS-16 48V- 1C0 Z	1457110000	E.15
RSMS-16 48V+ 1C0 S	1456980000	E.15
RSMS-16 48V+ 1C0 Z	1457070000	E.15
RSMS-16H 24V- 1C0 S	1457310000	E.14
RSMS-16H 24V- 1C0 Z	1457330000	E.14
RSMS-16H 24V+ 1C0 S	1457300000	E.14
RSMS-16H 24V+ 1C0 Z	1457320000	E.14
RSMS-8 12V- 1C0 S	1456640000	E.15
RSMS-8 12V- 1C0 Z	1456730000	E.15
RSMS-8 12V+ 1C0 S	1456590000	E.15
RSMS-8 12V+ 1C0 Z	1456690000	E.15
RSMS-8 24V- 1C0 S	1456650000	E.15
RSMS-8 24V- 1C0 Z	1456740000	E.15
RSMS-8 24V+ 1C0 S	1456610000	E.15
RSMS-8 24V+ 1C0 Z	1456700000	E.15
RSMS-8 24V+ BASE S	1456810000	E.15
RSMS-8 24VAC/DC 1C0 S	1456830000	E.15
RSMS-8 24VUC AU 1C0 S	1456840000	E.15
RSMS-8 48V- 1C0 S	1456670000	E.15
RSMS-8 48V- 1C0 Z	1456750000	E.15
RSMS-8 48V+ 1C0 S	1456620000	E.15
RSMS-8 48V+ 1C0 Z	1456710000	E.15
RSMS-8H 24V- 1C0 S	1456550000	E.14
RSMS-8H 24V- 1C0 Z	1456580000	E.14
RSMS-8H 24V+ 1C0 S	1456540000	E.14
RSMS-8H 24V+ 1C0 Z	1456570000	E.14
RSS112024	4061590000	C.15
RSS113024	4060120000	C.15

S

SKH 31 LP 250VAC RH1	0648661001	H.6
----------------------	------------	-----

Type	Order No.	Page
SKH 31 LP RH1	0586661001	H.6
SKH B64 RH2	0577360000	H.7
SKH C64 RH2	0178960000	H.7
SKH C64 RH2	0646660000	H.7
SKH C64*2 (A&C) RH2	8013120000	H.11
SKH D32 LP 5/16 RH2	0586761001	H.7
SKH D32*2 LP5.08/16 RH2	8050981001	H.11
SKH E48 LP2/LP	0690660000	H.8
SKH F32 (Z&B) LP RH2	0586861001	H.8
SKH F32 (Z&D) LP RH2	0586961001	H.9
SKH F48	0587060000	H.9
SKH H15S	8051300000	H.10
SKH2 31 LP	8174800000	H.4
SKH2 D32 LP	8174830000	H.4
SKH2 F32 (Z+B) LPP	8174850000	H.5
SKH2 F32 (Z+D) LP	8174860000	H.5

T

TBY-ADV151-24-PS-2KB-S	1384330000	C.13
TBY-ADV151-24-PS-2KB-Z	1384320000	C.13
TBY-ADV151-48-PS-2KB-S	1384280000	C.14
TBY-ADV151-48-PS-2KB-Z	1384250000	C.14
TBY-ADV151-PS-FL-2KB-S	1387820000	C.12
TBY-ADV151-PS-FL-2KB-Z	1397830000	C.12
TBY-ADV151-PS-L-2KB-S	1384350000	C.11
TBY-ADV151-PS-L-2KB-Z	1384340000	C.11
TBY-ADV551-CF-PS-2KB-S	1379500000	C.15
TBY-ADV551-CF-PS-2KB-Z	1379510000	C.15
TBY-C3-16AI-2KS-S	1371530000	C.6
TBY-C3-16AI-2KS-Z	1371550000	C.6
TBY-C3-16AIO-2KS-S	1371580000	C.6
TBY-C3-16AIO-2KS-Z	1371590000	C.6
TBY-C3-AIO-2KS-S	1371470000	C.6
TBY-C3-AIO-2KS-Z	1371500000	C.6
TBY-C3-AIO-4KS-S	1371600000	C.8
TBY-C3-AIO-4KS-Z	1371610000	C.8
TBY-C3-UNIV-2KB-S	1384090000	C.10
TBY-C3-UNIV-2KB-Z	1384080000	C.10
TBY-C3-UNIV-SP-2KS-S	1371640000	C.9
TBY-C3-UNIV-SP-2KS-Z	1371650000	C.9
TBY-RS-AIO-2KS-S	1371130000	C.18
TBY-RS-AIO-2KS-Z	1371140000	C.18
TBY-RS-AIO-4KS-S	1371220000	C.20
TBY-RS-AIO-4KS-Z	1371230000	C.20
TBY-RS-DIO-2KB-S	1371540000	C.23
TBY-RS-DIO-2KB-Z	1371570000	C.23
TBY-RS-UNIV-SP-2KS-S	1371340000	C.21
TBY-RS-UNIV-SP-2KS-Z	1371370000	C.21
TBY-SAI143-2KS-S	1371150000	C.18
TBY-SAI143-2KS-Z	1371170000	C.18
TBY-SAI143-F-LPS-2KS-S	1371240000	C.22
TBY-SAI143-F-LPS-2KS-Z	1371250000	C.22
TBY-SAI533-2KS-S	1371200000	C.18
TBY-SAI533-2KS-Z	1371210000	C.18
TBY-SAV144-2KS-S	1371180000	C.18
TBY-SAV144-2KS-Z	1371190000	C.18
TBY-SDV144-F-PS-2KB-S	1395370000	C.25
TBY-SDV144-F-PS-2KB-Z	1395380000	C.25
TBY-SDV144-PS-2KB-S	1371390000	C.24
TBY-SDV144-PS-2KB-Z	1371410000	C.24
TIA F10	1463520000	E.50
TIA SUBD 15S	1463530000	E.51
TIAL F10	1463540000	E.52
TIAL F20	1463550000	E.53
TRS 24VDC 1C0	1122770000	E.48
TRS 24VDC 1C0 AU	1123000000	E.48
TRS 24VDC 2C0	1123490000	E.48
TRS 24VDC 2C0 AU	1123730000	E.48
TRS 24VUC 2C0	1123500000	E.47
TRZ 24VDC 1C0	1122880000	E.48
TRZ 24VDC 1C0 AU	1123120000	E.48
TRZ 24VDC 2C0	1123610000	E.48
TRZ 24VDC 2C0 AU	1123850000	E.48
TRZ 24VUC 2C0	1123620000	E.47

Order No.	Type	Page
-----------	------	------

0170000000

0178960000	SKH C64 RH2	H.7
------------	-------------	-----

0180000000

0180961001	RSD A22 LP/LP	D.21
0181061001	RSD K22 LP/LP	D.21
0181461001	RSD 12 LP/LP	D.21

0220000000

0224261001	RS F20 LP2N 5/20	D.6
0224361001	RS F34 LP2N 5/34	D.6
0224461001	RS F40 LP2N 5/40	D.6
0224561001	RS F50 LP2N 5/50	D.6
0224661001	RS F60 LP2N 5/60	D.6
0224761001	RS F64 LP2N 5/64	D.6
0224861001	RS F26 LP2N 5/26	D.6
0224961001	RS F10 LP2N 5/10	D.6
0225061001	RS F14 LP2N 5/14	D.6
0225161001	RS F16 LP2N 5/16	D.6

0310000000

0310000000	PS 2.0 MC	C.20
------------	-----------	------

0570000000

0577360000	SKH B64 RH2	H.7
------------	-------------	-----

0580000000

0586661001	SKH 31 LP RH1	H.6
0586761001	SKH D32 LP 5/16 RH2	H.7
0586861001	SKH F32 (Z&B) LP RH2	H.8
0586961001	SKH F32 (Z&D) LP RH2	H.9
0587060000	SKH F48	H.9

0640000000

0646660000	SKH C64 RH2	H.7
0648661001	SKH 31 LP 250VAC RH1	H.6

0690000000

0690660000	SKH E48 LP2/LP	H.8
------------	----------------	-----

1120000000

1122770000	TRS 24VDC 1C0	E.48
1122880000	TRZ 24VDC 1C0	E.48
1123000000	TRS 24VDC 1C0 AU	E.48
1123120000	TRZ 24VDC 1C0 AU	E.48
1123490000	TRS 24VDC 2C0	E.48
1123500000	TRS 24VUC 2C0	E.47
1123610000	TRZ 24VDC 2C0	E.48
1123620000	TRZ 24VUC 2C0	E.47
1123730000	TRS 24VDC 2C0 AU	E.48
1123850000	TRZ 24VDC 2C0 AU	E.48
1126610000	RS ELCO 20/20RM S	D.12
1126620000	RS ELCO 20/20RM Z	D.12
1126630000	RS ELCO 20/20LM S	D.12
1126640000	RS ELCO 20/20LM Z	D.12
1126650000	RS ELCO 38/38RM S	D.12
1126660000	RS ELCO 38/38RM Z	D.12
1126670000	RS ELCO 38/38LM S	D.12
1126680000	RS ELCO 38/38LM Z	D.12
1126690000	RS ELCO 56/32RM S	D.12
1126700000	RS ELCO 56/32RM Z	D.12
1126710000	RS ELCO 56/32LM S	D.12
1126720000	RS ELCO 56/32LM Z	D.12
1126730000	RS ELCO 56/54RM S	D.12
1126740000	RS ELCO 56/54RM Z	D.12
1126750000	RS ELCO 56/54LM S	D.12
1126760000	RS ELCO 56/54LM Z	D.12
1126770000	RS ELCO 56/56RM S	D.12
1126780000	RS ELCO 56/56RM Z	D.12
1126790000	RS ELCO 56/56LM S	D.12
1126800000	RS ELCO 56/56LM Z	D.12
1126810000	RS ELCO 90/90RM S	D.13
1126820000	RS ELCO 90/90RM Z	D.13
1126870000	RS ELCO 90/90LM S	D.13
1126880000	RS ELCO 90/90LM Z	D.13
1128100000	RS VERT 4P 20X4 S	D.20
1128110000	RS VERT 4P 20X4 Z	D.20
1128120000	RS VERT 6P 12X6 S	D.20
1128130000	RS VERT 6P 12X6 Z	D.20
1128990000	RSM-8 PLC C SW 1C0 S	A.67
1129000000	RSM-8 PLC C SW 1C0 Z	A.67
1129030000	RSM-16 PLC C SW 1C0 S	A.76
1129040000	RSM-16 PLC C SW 1C0 Z	A.76
1129120000	RSM-16 PLC SW 1C0 S	A.78
1129130000	RSM-16 PLC SW 1C0 Z	A.78

1220000000

1221550000	FTA-C300-32DIOHV-S	B.6
1221560000	FTA-C300-32DIOHV-Z	B.6

Order No.	Type	Page
-----------	------	------

1221570000	FTA-C300-32D0-RSLIM-S	B.12
1221580000	FTA-C300-32D0-RSLIM-Z	B.12
1221590000	FTA-C300-32D0-LD-S	B.7
1221600000	FTA-C300-32D0-LD-Z	B.7
1222940000	FTA-C300-32D0-LD-S	B.6
1222950000	FTA-C300-32D0-LD-Z	B.6
1222980000	FTA-C300-16A0-SH-S	B.9
1222990000	FTA-C300-16A0-SH-Z	B.9
1223010000	FTA-C300-16A0-SH-P	B.9
1223020000	FTA-C300-16A0-TEST-S	B.9
1223030000	FTA-C300-16A0-TEST-Z	B.9

1240000000

1246910000	FTA-C300-32D0-FUSE-S	B.7
1246920000	FTA-C300-32D0-FUSE-Z	B.7
1247120000	FTA-C300-16AI-SH-S	B.8
1247130000	FTA-C300-16AI-SH-Z	B.8
1247140000	FTA-C300-16AI-TEST-S	B.8
1247150000	FTA-C300-16AI-TEST-Z	B.8

1280000000

1289090000	RS 4AIO DP-M258 SD S	A.57
1289100000	RSM-12 PLC C 1C0 S	A.73

1300000000

1308230000	RS 4AIO DP SD Z	A.56
1308240000	RS 4AIO I-M-DP SD Z	A.56
1308250000	RS 8AIO DP SD Z	A.58
1308270000	RS 16AIO DP SD Z	A.60
1308280000	RS 16AIO I-M-DP SD Z	A.60

1310000000

1311750000	RS 16IO 1W H Z	A.41
1311770000	RS 16IO 1W L H Z	A.41
1311780000	RS 16IO 1W L H Z	A.42
1311790000	RS 16IO 2W H Z	A.43
1311800000	RS 16IO 2W L H Z	A.43
1311810000	RS 16IO 2W I H S	A.44
1311820000	RS 16IO 2W I H Z	A.44
1311830000	RS 16IO 2W L H Z	A.44
1311840000	RS 16IO 2W F H Z	A.46
1311850000	RS 16IO 2W F-L H S	A.46
1311870000	RS 16IO 2W F-L H Z	A.46
1311880000	RS 16IO 3W H Z	A.47
1311890000	RS 16IO 3W L H Z	A.47
1312000000	RSM-16DI 24VDC S	A.62
1312010000	RSM-16DI 24VDC Z	A.62
1312020000	RSM-16DI 48VDC S	A.63
1312030000	RSM-16DI 48VDC Z	A.63
1312040000	FTA-C300-32DI-24VDC-S	B.11
1312740000	RSD A5 LP/LP	D.21
1312750000	RSD K5 LP/LP	D.21
1312760000	RSD A10 LP/LP	D.21
1312770000	RSD K10 LP/LP	D.21
1312780000	RSD A20 LP/LP	D.21
1312790000	RSD K20 LP/LP	D.21

1320000000

1323930xxx	PAC-S300-20-05-F	F.9
1323960xxx	PAC-S300-40-05-F	F.9
1329110xxx	PAC-S1200-HE20-V0	A.34
1329120xxx	PAC-S1200-HE20-V1	A.34
1329130xxx	PAC-S1200-RV12-V0	A.34
1329140xxx	PAC-S1200-RV24-V0	A.34
1329150xxx	PAC-S1200-HE20-V2	A.34
1329170xxx	PAC-S1200-HE20-V3	A.34
1329180xxx	PAC-S1200-HE20-V4	A.34
1329190xxx	PAC-S1200-RV12-V1	A.34
1329200xxx	PAC-S1200-HE20-V5	A.34
1329210xxx	PAC-S1200-RV24-V1	A.34
1329230xxx	PAC-S1200-HE20-V6	A.34
1329240xxx	PAC-S1200-HE20-V7	A.34
1329250xxx	PAC-S1200-SD15-V0	A.34
1329270xxx	PAC-S1200-SD25-V0	A.34
1329280xxx	PAC-S1200-SD15-V1	A.34
1329290xxx	PAC-S1200-SD25-V2	A.34
1329300xxx	PAC-S1200-SD25-V1	A.34

1330000000

1338580xxx	PAC-RX3I-SD37-V6	A.15
------------	------------------	------

1340000000

1349330010	PAC-C300-32-F-25-1M	B.15
1349340010	PAC-C300-36-F-25-1M	B.16
1349350010	C300-32B-F-2S-M25-1M	B.15
1349370010	C300-36B-F-2S-M25-1M	B.16
1349630010	PAC-UNIV-HE10-HE10-1M	F.3
1349640010	PAC-UNIV-HE14-HE14-1M	F.3
1349650010	PAC-UNIV-HE16-HE16-1M	F.3
1349670010	PAC-UNIV-HE20-HE20-1M	F.3
1349670xxx	PAC-UNIV-HE20-HE20	G.13
1349680010	PAC-UNIV-HE26-HE26-1M	F.3

Order No.	Type	Page
-----------	------	------

1349690010	PAC-UNIV-HE34-HE34-1M	F.3
1349700010	PAC-UNIV-HE40-HE40-1M	F.3
1349720010	PAC-UNIV-HE50-HE50-1M	F.3
1349730010	PAC-UNIV-HE10-F-1M	F.3
1349740010	PAC-UNIV-HE14-F-1M	F.3
1349750010	PAC-UNIV-D9M-D9M-1M	F.4
1349770010	PAC-UNIV-HE16-F-1M	F.3
1349780010	PAC-UNIV-D15M-D15M-1M	F.4
1349790010	PAC-UNIV-HE20-F-1M	F.3
1349790xxx	PAC-UNIV-HE20-F	F.9
1349800010	PAC-UNIV-D25M-D25M-1M	F.4
1349820010	PAC-UNIV-HE26-F-1M	F.3
1349830010	PAC-UNIV-D37M-D37M-1M	F.4
1349840010	PAC-UNIV-HE34-F-1M	F.3
1349850010	PAC-UNIV-D50M-D50M-1M	F.4
1349870010	PAC-UNIV-D9F-D9F-1M	F.4
1349880010	PAC-UNIV-HE40-F-1M	F.3
1349880xxx	PAC-UNIV-HE40-F	F.9
1349890010	PAC-UNIV-D15F-D15F-1M	F.4
1349920010	PAC-UNIV-D25F-D25F-1M	F.4
1349930010	PAC-UNIV-D37F-D37F-1M	F.4
1349940010	PAC-UNIV-D50F-D50F-1M	F.4
1349950010	PAC-UNIV-D9M-D9F-1M	F.5
1349970010	PAC-UNIV-D15M-D15F-1M	F.5
1349980010	PAC-UNIV-D25M-D25F-1M	F.5
1349980xxx	PAC-UNIV-D25M-D25F	A.26
1349990010	PAC-UNIV-D37M-D37F-1M	F.5

1350000000

1350000010	PAC-UNIV-D50M-D50F-1M	F.5
1350250xxx	PAC-CMLX-UNIU-V0-XXXX	F.9
1350270xxx	PAC-CMLX-UNIS-V0-XXXX	F.9
1350400010	PAC-UNIV-D9M-F-1M	F.4
1350420010	PAC-UNIV-D15M-F-1M	F.4
1350430010	PAC-UNIV-D25M-F-1M	F.4
1350430xxx	PAC-UNIV-D25M-F	F.9
1350440010	PAC-UNIV-D37M-F-1M	F.4
1350450010	PAC-UNIV-D50M-F-1M	F.4
1350470010	PAC-UNIV-D9F-F-1M	F.4
1350480010	PAC-UNIV-D15F-F-1M	F.4
1350480xxx	PAC-UNIV-D15F-F	A.29
1350490010	PAC-UNIV-D25F-F-1M	F.4
1350490xxx	PAC-UNIV-D25F-F	A.29
1350500010	PAC-UNIV-D37F-F-1M	F.4
1350500xxx	PAC-UNIV-D37F-F	A.13
1350520010	PAC-UNIV-D50F-F-1M	F.4
1355950xxx	PAC-M340-UNIU-V0	F.9

1370000000

1371120000	DEK 5 TB-V3	C.18
1371130000	TBY-RS-AIO-2KS-S	C.18
1371140000	TBY-RS-AIO-2KS-Z	C.18
1371150000	TBY-SAI143-2KS-S	C.18
1371170000	TBY-SAI143-2KS-Z	C.18
1371180000	TBY-SAV144-2KS-S	C.18
1371190000	TBY-SAV144-2KS-Z	C.18
1371200000	TBY-SAI533-2KS-S	C.18
1371210000	TBY-SAI533-2KS-Z	C.18
1371220000	TBY-RS-AIO4-2KS-S	C.20
1371230000	TBY-RS-AIO4-2KS-Z	C.20
1371240000	TBY-SAI143-F-L-PS-2KS-S	C.22
1371250000	TBY-SAI143-F-L-PS-2KS-Z	C.22
1371340000	TBY-RS-UNIV-SP-2KS-S	C.21
1371370000	TBY-RS-UNIV-SP-2KS-Z	C.21
1371390000	TBY-SDV144-PS-2KB-S	C.24
1371410000	TBY-SDV144-PS-2KB-Z	C.24
1371470000	TBY-C3-AIO-2KS-S	C.6
1371500000	TBY-C3-AIO-2KS-Z	C.6
1371530000	TBY-C3-16AI-2KS-S	C.6
1371540000	TBY-RS-DIO-2KB-S	C.23
1371550000	TBY-C3-16AI-2KS-Z	C.6
1371570000	TBY-RS-DIO-2KB-Z	C.23
1371580000	TBY-C3-16AIO-2KS-S	C.6
1371590000	TBY-C3-16AIO-2KS-Z	C.6
1371600000	TBY-C3-AIO4-2KS-S	C.8
1371610000	TBY-C3-AIO4-2KS-Z	C.8
1371640000	TBY-C3-UNIV-SP-2KS-S	C.9
1371650000	TBY-C3-UNIV-SP-2KS-Z	C.9
1373690xxx	PAC-RX3I-SD25-V3	A.15
1373700xxx	PAC-RX3I-SD25-V4	A.15
1373730010	C300-32B-216B-2S-M14-1M	B.19
1373740010	C300-32B-F-2S-M14-1M	B.15
1373750010	C300-36B-F-2S-M14-1M	B.16
1373770010	C300-32B-216B-2S-M25-1M	B.19
1373780010	C300-36B-F-2S-M34-1M	B.16
1373790010	C300-32B-216B-2S-M50-1M	B.19
1373820010	C300-36B-F-2S-M50-1M	B.16
1373830010	PAC-C300-32-1616-14-1M	B.19
1373840010	PAC-C300-32-F-14-1M	B.15
1373850010	PAC-C300-36-F-14-1M	B.16
1373880010	PAC-C300-32-1616-25-1M	B.19
1373900010	PAC-C300-32-F-34-1M	B.15
1373910010	PAC-C300-36-F-34-1M	B.16
1373920010	PAC-C300-32-1616-50-1M	B.19
1373940010	PAC-C300-32-F-50-1M	B.15
1373950010	PAC-C300-36-F-50-1M	B.16
1378040xxx	PAC-GF30-UNIU-V0	F.9

Order No.	Type	Page
1379110000	DEK 5 TB-V2	C.18
1379120000	DEK 5 TB-V1	C.18
1379500000	TBY-ADV551-CF-PS-2KB-S	C.15
1379510000	TBY-ADV551-CF-PS-2KB-Z	C.15

1380000000

1384080000	TBY-C3-UNIV-2KB-Z	C.10
1384090000	TBY-C3-UNIV-2KB-S	C.10
1384250000	TBY-ADV151-48-PS-2KB-Z	C.14
1384280000	TBY-ADV151-48-PS-2KB-S	C.14
1384320000	TBY-ADV151-24-PS-2KB-Z	C.13
1384330000	TBY-ADV151-24-PS-2KB-S	C.13
1384340000	TBY-ADV151-PS-L-2KB-Z	C.11
1384350000	TBY-ADV151-PS-L-2KB-S	C.11
1388240000	DEK 5 TB-V8	C.6
1388250000	DEK 5 TB-V9	C.6

1390000000

1390680000	DEK 5 TB-V7	C.6
1390690000	DEK 5 TB-V6	C.6
1390700000	KSW 5 TB-V1	C.18
1391740000	FUSE MST250 0.1A TR5	C.25
1391770000	FUSE MST250 1A TR5	C.22
1394320000	KSW 5 TB-V2	C.18
1394330000	KSW 4 TB-V3	C.18
1394340000	KSW 5 TB-V6	C.6
1394350000	KSW 5 TB-V7	C.6
1394370000	KSW 5 TB-V8	C.6
1394380000	KSW 5 TB-V9	C.6
1395370000	TBY-SDV144-F-PS-2KB-S	C.25
1395380000	TBY-SDV144-F-PS-2KB-Z	C.25
1397820000	TBY-ADV151-PS-F-L-2KB-S	C.12
1397830000	TBY-ADV151-PS-F-L-2KB-Z	C.12

1400000000

1404320000	DEK 5/5 TB-V15	C.20
1404330000	DEK 5/5 TB-V16	C.20
1404540000	KSW 5 TB-V16	C.20
1404550000	KSW 5 TB-V15	C.20
1405070xxx	PAC-UNIV-FJ20-F-XXXX	F.9

1410000000

1411810000	KSW 4 TB-V17	C.8
1411820000	KSW 4 TB-V18	C.8
1411830000	KSW 4 TB-V19	C.8
1411840000	KSW 4 TB-V20	C.8
1411860000	DEK 5/5 TB-V17	C.8
1411870000	DEK 5/5 TB-V18	C.8
1411880000	DEK 5/5 TB-V19	C.8
1411890000	DEK 5/5 TB-V20	C.8
1414780000	DEK 5/5 TB-V23	C.14
1414820000	DEK 5/5 TB-V25	C.12
1414830000	DEK 5/5 TB-V26	C.15
1414850000	KSW 4 TB-V23	C.14
1414880000	KSW 4 TB-V25	C.12
1414910000	KSW 4 TB-V26	C.15
1415220000	FTA-C300-16DAI-SH-S	B.10
1415230000	FTA-C300-16DAI-SH-Z	B.10
1419430xxx	PAC-RX31-HE40-V0	A.15

1420000000

1428080000	RS SD15M HD UNC4.40 S	D.10
1428090000	RS SD26M HD UNC4.40 S	D.10
1428110000	RS SD44M HD UNC4.40 S	D.10
1428120000	RS SD62M HD UNC4.40 S	D.10
1428130000	RS SD15F HD UNC4.40 S	D.10
1428140000	RS SD26F HD UNC4.40 S	D.10
1428150000	RS SD44F HD UNC4.40 S	D.10
1428160000	RS SD62F HD UNC4.40 S	D.10

1430000000

1431530xxx	PAC-S7300-HE20-V18	A.31
1431700000	RS 16IO 2W I-L 2H S	A.45
1431720000	RSM-16 PLC-I 1CO 2H S	A.83

1440000000

1440740010	PAC-HD15M-HD15M-V0-1M	F.6
1440750010	PAC-HD15F-HD15F-V0-1M	F.6
1440770010	PAC-HD15M-HD15F-V0-1M	F.7
1440780010	PAC-HD15F-F-V0-1M	F.6
1440810010	PAC-HD15M-F-V0-1M	F.6
1447400000	RSM-4 12V+ 1CO S	E.6
1447410000	RSM-4 12V- 1CO S	E.6
1447420000	RSM-4 12V+ 1CO Z	E.6
1447430000	RSM-4 12V- 1CO Z	E.6
1447440000	RSM-4 24V+ 1CO S	E.6
1447450000	RSM-4 24V- 1CO S	E.6
1447470000	RSM-4 24V+ 1CO Z	E.6
1447480000	RSM-4 24V- 1CO Z	E.6
1447500000	RSM-4 48V+ 1CO S	E.6
1447510000	RSM-4 48V- 1CO S	E.6
1447520000	RSM-4 48V+ 1CO Z	E.6

Order No.	Type	Page
1447530000	RSM-4 48V- 1CO Z	E.6
1447540000	RSM-4 24VAC/DC 1CO S	E.6
1447550000	RSM-4 24VAC/DC 1CO Z	E.6
1447570000	RSM-4 115VAC/DC 1CO S	E.6
1447580000	RSM-4 115VAC/DC 1CO Z	E.6
1447600000	RSM-4 230VAC 1CO S	E.6
1447610000	RSM-4 230VAC 1CO Z	E.6
1447740000	RSM-4I 24V+ 1CO S	E.6
1447750000	RSM-4I 24V+ 1CO Z	E.6
1447820000	RSM-8 12V+ 1CO S	E.8
1447830000	RSM-8 12V- 1CO S	E.8
1447840000	RSM-8 12V+ 1CO Z	E.8
1447850000	RSM-8 12V- 1CO Z	E.8
1447870000	RSM-8 24V+ 1CO S	E.8
1447880000	RSM-8 24V- 1CO S	E.8
1447890000	RSM-8 24V+ 1CO Z	E.8
1447900000	RSM-8 24V- 1CO Z	E.8
1447910000	RSM-8 48V+ 1CO S	E.8
1447920000	RSM-8 48V- 1CO S	E.8
1447930000	RSM-8 48V+ 1CO Z	E.8
1447940000	RSM-8 48V- 1CO Z	E.8
1447950000	RSM-8 24VAC/DC 1CO S	E.8
1447970000	RSM-8 24VAC/DC 1CO Z	E.8
1447980000	RSM-8 115VAC/DC 1CO S	E.8
1447990000	RSM-8 115VAC/DC 1CO Z	E.8
1448000000	RSM-8 230VAC 1CO S	E.8
1448010000	RSM-8 230VAC 1CO Z	E.8
1448140000	RSM-8I 24V+ 1CO S	E.8
1448170000	RSM-8I 24V- 1CO Z	E.8
1448230000	RSM-16 12V+ 1CO S	E.10
1448240000	RSM-16 12V- 1CO S	E.10
1448250000	RSM-16 12V+ 1CO Z	E.10
1448270000	RSM-16 12V- 1CO Z	E.10
1448280000	RSM-16 24V+ 1CO S	E.10
1448290000	RSM-16 24V- 1CO S	E.10
1448300000	RSM-16 24V+ 1CO Z	E.10
1448310000	RSM-16 24V- 1CO Z	E.10
1448320000	RSM-16 48V+ 1CO S	E.10
1448330000	RSM-16 48V- 1CO S	E.10
1448340000	RSM-16 48V+ 1CO Z	E.10
1448350000	RSM-16 48V- 1CO Z	E.10
1448370000	RSM-16 24VAC/DC 1CO S	E.10
1448380000	RSM-16 24VAC/DC 1CO Z	E.10
1448390000	RSM-16 115VAC/DC 1CO S	E.10
1448400000	RSM-16 115VAC/DC 1CO Z	E.10
1448410000	RSM-16 230VAC 1CO S	E.10
1448420000	RSM-16 230VAC 1CO Z	E.10
1448450000	RSM-16 24VDC 1NO + C S	A.84
1448470000	RSM-16 24VDC 1NO + C Z	A.84
1448480000	RSM-16 24V+ BASE S	E.10
1448490000	RSM-16 24V+ BASE Z	E.10
1448540000	RSM16I 24V+ 1CO S	E.10
1448550000	RSM16I 24V+ 1CO Z	E.10
1448610000	RSM-4 12V+ 2CO S	E.6
1448620000	RSM-4 12V- 2CO S	E.6
1448630000	RSM-4 12V+ 2CO Z	E.6
1448640000	RSM-4 12V- 2CO Z	E.6
1448650000	RSM-4 24V+ 2CO S	E.6
1448670000	RSM-4 24V- 2CO S	E.6
1448680000	RSM-4 24V+ 2CO Z	E.6
1448690000	RSM-4 24V- 2CO Z	E.6
1448700000	RSM-4 48V+ 2CO S	E.6
1448710000	RSM-4 48V- 2CO S	E.6
1448720000	RSM-4 48V+ 2CO Z	E.6
1448730000	RSM-4 48V- 2CO Z	E.6
1448740000	RSM-4 24VAC/DC 2CO S	E.6
1448770000	RSM-4 24VAC/DC 2CO Z	E.6
1448780000	RSM-4 115VAC/DC 2CO S	E.6
1448790000	RSM-4 115VAC/DC 2CO Z	E.6
1448800000	RSM-4 230VAC 2CO S	E.6
1448810000	RSM-4 230VAC 2CO Z	E.6
1448820000	RSM-4I 24V+ 2CO S	E.6
1448830000	RSM-4I 24V- 2CO Z	E.6
1448890000	RSM-8 12V+ 2CO S	E.8
1448900000	RSM-8 12V- 2CO S	E.8
1448910000	RSM-8 12V+ 2CO Z	E.8
1448920000	RSM-8 12V- 2CO Z	E.8
1448930000	RSM-8 24V+ 2CO S	E.8
1448940000	RSM-8 24V- 2CO S	E.8
1448950000	RSM-8 24V+ 2CO Z	E.8
1448970000	RSM-8 24V- 2CO Z	E.8
1448980000	RSM-8 48V+ 2CO S	E.8
1448990000	RSM-8 48V- 2CO S	E.8
1449010000	RSM-8 48V+ 2CO Z	E.8
1449020000	RSM-8 48V- 2CO Z	E.8
1449030000	RSM-8 24VAC/DC 2CO S	E.8
1449040000	RSM-8 24VAC/DC 2CO Z	E.8
1449050000	RSM-8 115VAC/DC 2CO S	E.8
1449070000	RSM-8 115VAC/DC 2CO Z	E.8
1449080000	RSM-8 230VAC 2CO S	E.8
1449090000	RSM-8 230VAC 2CO Z	E.8
1449100000	RSM-8I 24V+ 2CO S	E.8
1449110000	RSM-8I 24V- 2CO Z	E.8
1449170000	RSM-16 12V+ 2CO S	E.10
1449180000	RSM-16 12V- 2CO S	E.10
1449190000	RSM-16 12V+ 2CO Z	E.10
1449200000	RSM-16 12V- 2CO Z	E.10
1449210000	RSM-16 24V+ 2CO S	E.10
1449220000	RSM-16 24V- 2CO S	E.10

Order No.	Type	Page
1449230000	RSM-16 24V+ 2CO Z	E.10
1449250000	RSM-16 24V- 2CO Z	E.10
1449270000	RSM-16 48V+ 2CO S	E.10
1449280000	RSM-16 48V- 2CO S	E.10
1449290000	RSM-16 48V+ 2CO Z	E.10
1449300000	RSM-16 48V- 2CO Z	E.10
1449310000	RSM-16 24VAC/DC 2CO S	E.10
1449320000	RSM-16 24VAC/DC 2CO Z	E.10
1449330000	RSM-16 115VAC/DC 2CO S	E.10
1449340000	RSM-16 115VAC/DC 2CO Z	E.10
1449350000	RSM-16 230VAC 2CO S	E.10
1449370000	RSM-16 230VAC 2CO Z	E.10
1449380000	RSM-16I 24V+ 2CO S	E.10
1449390000	RSM-16I 24V+ 2CO Z	E.10

1450000000

1452610xxx	PAC-FJ40-F-1M	F.9
1456540000	RSMS-8H 24V+ 1CO S	E.14
1456550000	RSMS-8H 24V- 1CO S	E.14
1456570000	RSMS-8H 24V+ 1CO Z	E.14
1456580000	RSMS-8H 24V- 1CO Z	E.14
1456590000	RSMS-8 12V+ 1CO S	E.15
1456610000	RSMS-8 24V+ 1CO S	E.15
1456620000	RSMS-8 48V+ 1CO S	E.15
1456640000	RSMS-8 12V- 1CO S	E.15
1456650000	RSMS-8 24V- 1CO S	E.15
1456670000	RSMS-8 48V- 1CO S	E.15
1456690000	RSMS-8 12V+ 1CO Z	E.15
1456700000	RSMS-8 24V+ 1CO Z	E.15
1456710000	RSMS-8 48V+ 1CO Z	E.15
1456730000	RSMS-8 12V- 1CO Z	E.15
1456740000	RSMS-8 24V- 1CO Z	E.15
1456750000	RSMS-8 48V- 1CO Z	E.15
1456810000	RSMS-8 24V+ BASE S	E.15
1456830000	RSMS-8 24VAC/DC 1CO S	E.15
1456840000	RSMS-8 24VUC AU 1CO S	E.15
1456970000	RSMS-16 24V+ 1CO S	E.15
1456980000	RSMS-16 48V+ 1CO S	E.15
1457000000	RSMS-16 12V- 1CO S	E.15
1457010000	RSMS-16 24V- 1CO S	E.15
1457020000	RSMS-16 48V- 1CO S	E.15
1457040000	RSMS-16 12V- 1CO Z	E.15
1457050000	RSMS-16 24V+ 1CO Z	E.15
1457070000	RSMS-16 48V+ 1CO Z	E.15
1457090000	RSMS-16 12V- 1CO Z	E.15
1457100000	RSMS-16 24V- 1CO Z	E.15
1457110000	RSMS-16 48V- 1CO Z	E.15
1457170000	RSMS-16 24V+ BASE S	E.15
1457180000	RSMS-16 24V+ BASE Z	E.15
1457190000	RSMS-16 24VAC/DC 1CO S	E.15
1457200000	RSMS-16 24VUC AU 1CO S	E.15
1457210000	RSMS-16 24VAC/DC 1CO Z	E.15
1457220000	RSMS-16 24VUC AU 1CO Z	E.15
1457300000	RSMS-16H 24V+ 1CO S	E.14
1457310000	RSMS-16H 24V- 1CO S	E.14
1457320000	RSMS-16H 24V+ 1CO Z	E.14
1457330000	RSMS-16H 24V- 1CO Z	E.14
1457370000	RSM-8 24V+ BASE S	E.8
1457380000	RSM-8 24V+ BASE Z	E.8
1457390000	RSM-8 24VDC 1NO + C S	A.70
1457400000	RSM-8 24VDC 1NO + C Z	A.70
1457430000	RSM-4 24V+ BASE S	E.6
1457440000	RSM-4 24V+ BASE Z	E.6

1460000000

1461210000	RS F20 X3 IN	G.30
1461220000	RS F20 X3 OUT	G.30
1462040xxx	PAC-S1500-HE20-V0	G.13
1462090xxx	PAC-S1500-HE20-V1	G.13
1462100xxx	PAC-S1500-HE20-V2	G.13
1462110xxx	PAC-S1500-HE20-V3	A.35
1462130xxx	PAC-S1500-RV24-V0	A.35
1462140xxx	PAC-S1500-RV24-V1	A.35
1462150xxx	PAC-S1500-SD15-V0	A.35
1462160xxx	PAC-S1500-SD15-V1	A.35
1462170xxx	PAC-S1500-SD25-V0	A.35
1462200xxx	PAC-S1500-SD37-V0	A.35
1463520000	TIA F10	E.50
1463530000	TIA SUBD 15S	E.51
1463540000	TIAL F10	E.52
1463550000	TIAL F20	E.53
1464780000	RSM-8H 24V+ 1CO S	A.69
1464790000	RSM-8H 24V+ 1CO Z	A.69
1464800000	RSM-8H 24V- 1CO S	A.72
1464810000	RSM-8H 24V- 1CO Z	A.72
1466230xxx	PAC-S1500-UNIUV-V0	F.9
1466240xxx	PAC-S1500-UNIS-V0	F.9

1470000000

1479600xxx	PAC-M340-HE40-V0-XXXX	A.24
------------	-----------------------	------

Order No.	Type	Page
1480770000	RS ELCOF 38/38LM S	D.14
1480780000	RS ELCOF 56/56RM S	D.14
1480790000	RS ELCOF 56/56LM S	D.14
1481590010	PAC-C300-1616-14-1M	B.17
1481610010	PAC-C300-1616-25-1M	B.17
1481620010	PAC-C300-1616-34-1M	B.17
1481630010	PAC-C300-1616-50-1M	B.17
1481640010	PAC-C300-16-F-14-1M	B.18
1481650010	PAC-C300-16-F-25-1M	B.18
1481660010	PAC-C300-16-F-34-1M	B.18
1481670010	PAC-C300-16-F-50-1M	B.18
1481680010	C300-16B-160B-2S-M14-1M	B.17
1481690010	C300-16B-160B-2S-M25-1M	B.17
1481710010	C300-16B-160B-2S-M34-1M	B.17
1481720010	C300-16B-160B-2S-M50-1M	B.17
1481730010	C300-16B-F-2S-M14-1M	B.18
1481740010	C300-16B-F-2S-M25-1M	B.18
1481750010	C300-16B-F-2S-M34-1M	B.18
1481760010	C300-16B-F-2S-M50-1M	B.18
1489160xxx	PAC-RCKW-HE20-V0	A.20
1489170xxx	PAC-RCKW-HE20-V1	A.20
1489180xxx	PAC-RCKW-HE20-V2	A.20

1490000000

1498820010	PAC-C300-3232-34-1M	B.13
------------	---------------------	------

1500000000

1504000xxx	PAC-S400-UNIU-V0-XXXX	F.9
1504020xxx	PAC-S400-UNIS-V0-XXXX	F.9

1530000000

1536820010	PAC-YOK-MIL50-V0-1M	C.26
1536840010	PAC-YOK-MIL40-V0-1M	C.26

1980000000

1985930000	FAD BLK1 SL24 M	G.25
1985940000	FAD BLK1 HE20 16I M	G.23
1985950000	FAD BLK1 HE20 16O M	G.24
1985960000	FAD BLK7 2XHE20 M	G.26
1985970000	FAD BLK9 2XHE20 M	G.27
1985980000	FAD S5115 SL24 M	G.6
1986010000	FAD S5115 HE20 16IO M	G.6
1986030000	FAD S5135 SL20 R	G.22
1986040000	FAD S5135 HE20 16IO R	G.9
1986050000	FAD S5135 2XHE20 32IO R	G.21
1988930010	PAC-H062F-HD62F-V0-1M	F.6
1989360010	PAC-HD44M-HD44F-V0-1M	F.7

1990000000

1991700xxx	PAC-S1500-SD25-V3	A.35
1991710xxx	PAC-S1500-SD25-V4	A.35
1991720xxx	PAC-S1500-SD37-V2	A.35
1991730000	FAD S5115 2XHE20 32IO M	G.17
1993500000	MIGRATION RACK S5 135 H	G.28
1993520000	MIGRATION RACK TSX7 H	G.29
1993530000	MIGRATION RACK S5 115 H	G.28
1994500xxx	PAC-S1500-HE20-V4-XXXX	A.35

2000000000

2000020000	FTA-C300-16A0-TP-Z	B.10
2000150xxx	PAC-S1500-40P-05-XXXX	F.9
2003420010	PAC-HD26M-HD26F-V0-1M	F.7
2004530xxx	PAC-S1500-SL24-AR1	G.5
2004540xxx	PAC-S1500-SL24-AYO-XXXX	G.5
2004590xxx	PAC-S1500-SL20-AR0	G.9
2004600xxx	PAC-S1500-SL20-AYO	G.9
2004610xxx	PAC-S1500-SL24-AR0	G.13
2004620xxx	PAC-S300-SL24-AR0	G.5
2004630xxx	PAC-S300-SL24-AR1	G.5
2004640xxx	PAC-S300-SL24-AY2	G.5
2004650xxx	PAC-S300-SL24-AR2	G.13
2004660xxx	PAC-S300-SL24-AR3	G.13
2004670xxx	PAC-PREM-SL24-AY2-XXXX	G.6
2004680xxx	PAC-PREM-SL24-AYO-XXXX	G.14
2004690xxx	PAC-PREM-SL24-AY1-XXXX	G.14
2004850xxx	PAC-S300-SL20-AY1	G.9
2004860xxx	PAC-S300-SL20-AYO	G.9
2004870xxx	PAC-S300-SL20-AR1	G.9
2004880xxx	PAC-S300-SL20-AR0	G.9

2040000000

2045120000	FAD S5115 SL46 A M	G.19
2045910xxx	PAC-S300-SL46-AM0-XXXX	G.5
2045970xxx	PAC-S300-SL46-AJO-XXXX	G.5

2060000000

2062360xxx	PAC-S400-SD25-V4-LLLM	A.33
2062380xxx	PAC-S400-SD25-V5-LLLM	A.33

Order No.	Type	Page
-----------	------	------

2090000000

2093080010	PAC-HD26F-F-V0-1M	F.6
2093090010	PAC-HD44F-F-V0-1M	F.6
2093680010	PAC-HD26M-F-V0-1M	F.6
2093910010	PAC-HD44M-F-V0-1M	F.6
2094140010	PAC-HD26F-HD26F-V0-1M	F.6
2094180010	PAC-HD44F-HD44F-V0-1M	F.6
2094720010	PAC-HD26M-HD26M-V0-1M	F.6
2094730010	PAC-HD44M-HD44M-V0-1M	F.6
2094770010	PAC-HD62M-HD62M-V0-1M	F.6
2094800010	PAC-HD62M-HD62F-V0-1M	F.7

2100000000

2183160xxx	PAC-S300-HE20-U-V0-LLLM	A.30
2183170xxx	PAC-S300-HE40-U-V0-LLLM	A.30

2420000000

2420520010	PAC-YOK-MIL40-F-1M	C.26
2420530010	PAC-YOK-MIL50-F-1M	C.26
2420540010	PAC-HE10-F-HF-1M	F.3
2420550010	PAC-HE10-HE10-HF-1M	F.3
2420560010	PAC-D9M-F-HF-1M	F.4
2420570010	PAC-D9M-D9M-HF-1M	F.4
2420580010	PAC-D9M-D9F-HF-1M	F.5
2425650010	PAC-HE14-F-HF-1M	F.3
2425660010	PAC-HE20-F-HF-1M	F.3
2425680010	PAC-HE40-F-HF-1M	F.3
2425690010	PAC-HE34-F-HF-1M	F.3
2425700010	PAC-HE16-HE16-HF-1M	F.3
2425710010	PAC-HE16-F-HF-1M	F.3
2425720010	PAC-HE26-F-HF-1M	F.3
2425730010	PAC-HE20-HE20-HF-1M	F.3
2425740010	PAC-HE26-HE26-HF-1M	F.3
2425940010	PAC-HE14-HE14-HF-1M	F.3
2425950010	PAC-HE34-HE34-HF-1M	F.3
2425960010	PAC-HE40-HE40-HF-LLLM	F.3
2425970010	PAC-HE50-HE50-HF-1M	F.3
2425980010	PAC-D15M-F-HF-1M	F.4
2425990010	PAC-D25M-F-HF-1M	F.4
2426000010	PAC-D37M-F-HF-1M	F.4
2426020010	PAC-D9F-F-HF-1M	F.4
2426030010	PAC-D15F-F-HF-1M	F.4
2426040010	PAC-D25F-F-HF-1M	F.4
2426050010	PAC-D37F-F-HF-1M	F.4
2426070010	PAC-D15M-D15M-HF-1M	F.4
2426080010	PAC-D25M-D25M-HF-1M	F.4
2426090010	PAC-D37M-D37M-HF-1M	F.4
2426100010	PAC-D50M-D50M-HF-1M	F.4
2426110010	PAC-D9F-D9F-HF-1M	F.4
2426120010	PAC-D25F-D25F-HF-1M	F.4
2426130010	PAC-D37F-D37F-HF-1M	F.4
2426140010	PAC-D50F-D50F-HF-1M	F.4
2426150010	PAC-D15M-D15F-HF-1M	F.5
2426160010	PAC-D25M-D25F-HF-1M	F.5
2426170010	PAC-D50M-D50F-HF-1M	F.5
2426180010	PAC-D15F-D15F-HF-1M	F.4
2426190010	PAC-D37M-D37F-HF-1M	F.5
2426750xxx	PAC-M340-UNIS-V0-XXXX	F.9
2426760xxx	PAC-M340-UNIS-V1-XXXX	F.9
2426770xxx	PAC-PREM-UNIS-V0-XXXX	F.9
2426780xxx	PAC-CJ1W-UNIU-V0-XXXX	F.9
2426790xxx	PAC-CJ1W-UNIS-V0-XXXX	F.9

2430000000

2435760xxx	PAC-GF30-UNIS-V0-XXXX	F.9
2435770xxx	PAC-FJ24-F-0-XXXX	F.9
2435780xxx	PAC-RX31-UNIS-V0-XXXX	F.9
2437240000	FUS G 25/1.00A/F	C.15

4000000000

4007530000	FUSE G 25/2A/F BL	C.25
4007550000	FUSE G 25/6.30A/F GN	C.22

4060000000

4060120000	RSS1113024	C.15
4061590000	RSS1112024	C.15

7780000000

7789005xxx	PAC-SLC5-HE20-V4	A.22
7789006xxx	PAC-SLC5-HE20-V5	A.22
7789015xxx	PAC-CMLX-HE20-V0	A.20
7789016xxx	PAC-CMLX-RV24-V1	A.20
7789017xxx	PAC-CMLX-RV12-V0	A.20
7789024xxx	PAC-CMLX-RV24-V2	A.20
7789025xxx	PAC-CMLX-RV24-V3	A.20
7789026xxx	PAC-CMLX-SD15-V0	A.20
7789027xxx	PAC-CMLX-SD15-V1	A.20
7789028xxx	PAC-CMLX-SD25-V0	A.20
7789029xxx	PAC-CMLX-SD15-V2	A.20
7789030xxx	PAC-CTLX-RV36-V0	A.21
7789031xxx	PAC-CTLX-RV24-V0	A.21
7789032xxx	PAC-CTLX-SD37-V0	A.21

Order No.	Type	Page
-----------	------	------

7789033xxx	PAC-CTLX-SD15-V0	A.21
7789034xxx	PAC-CTLX-SD15-V1	A.21
7789035xxx	PAC-CTLX-SD25-V0	A.21
7789036xxx	PAC-CTLX-SD25-V1	A.21
7789037xxx	PAC-CTLX-SD25-V2	A.21
7789038xxx	PAC-CTLX-SD25-V3	A.21
7789039xxx	PAC-CTLX-HE20-V0	A.21
7789040xxx	PAC-CTLX-HE20-V1	A.21
7789041xxx	PAC-CTLX-HE20-V2	A.21
7789042xxx	PAC-CTLX-HE20-V3	A.21
7789043xxx	PAC-CMLX-SD15-V3	A.20
7789044xxx	PAC-CMLX-SD25-V1	A.20
7789045xxx	PAC-CMLX-SD25-V2	A.20
7789046xxx	PAC-CMLX-SD15-V4	A.20
7789047xxx	PAC-CMLX-SD15-V5	A.20
7789048xxx	PAC-CTLX-RV12-V0	A.21
7789049xxx	PAC-CTLX-HE20-V4	A.21
7789056xxx	PAC-CTLX-RV24-V1	A.21
7789057xxx	PAC-CTLX-RV12-V1	A.21
7789058xxx	PAC-CTLX-HE20-V5	A.21
7789059xxx	PAC-CTLX-HE20-V6	A.21
7789061xxx	PAC-GF30-RV24-V1	A.15
7789063xxx	PAC-GF30-RV24-V3	A.15
7789064xxx	PAC-GF30-RV24-V4	A.15
7789066xxx	PAC-GF30-HE20-V0	A.15
7789067xxx	PAC-GF30-HE20-V1	A.15
7789068xxx	PAC-GF30-HE20-V2	A.15
7789069xxx	PAC-GF30-HE20-V3	A.14
7789072xxx	PAC-GF30-SD25-V0	A.15
7789073xxx	PAC-GF30-SD25-V1	A.15
7789074xxx	PAC-GF30-SD37-V0	A.15
7789075xxx	PAC-GF30-SD15-V0	A.15
7789076xxx	PAC-GF30-SD15-V1	A.15
7789100xxx	PAC-UNIV-HE20-F	A.29
7789104xxx	PAC-UNIV-RV24-F	A.29
7789106xxx	PAC-UNIV-RV36-F	A.22
7789108xxx	PAC-UNIV-RV12-F	A.29
7789113xxx	PAC-QTUM-RV24-V3	A.27
7789118xxx	PAC-QTUM-RV36-V0	A.27
7789119xxx	PAC-QTUM-HE20-V0	A.27
7789120xxx	PAC-QTUM-HE20-V1	A.27
7789121xxx	PAC-QTUM-HE20-V2	A.27
7789123xxx	PAC-QTUM-SD37-V0	A.27
7789124xxx	PAC-QTUM-SD15-V0	A.27
7789125xxx	PAC-QTUM-SD25-V0	A.27
7789126xxx	PAC-QTUM-SD25-V1	A.27
7789133xxx	PAC-QTUM-HE20-V3	A.27
7789134xxx	PAC-QTUM-SD25-V2	A.27
7789135xxx	PAC-QTUM-SD25-V3	A.27
7789136xxx	PAC-QTUM-SD25-V4	A.27
7789137xxx	PAC-QTUM-SD25-V5	A.27
7789151xxx	PAC-CTLX-HE20-V7	A.21
7789152xxx	PAC-CTLX-HE20-V8	A.21
7789153xxx	PAC-CTLX-RV24-V2	A.21
7789154xxx	PAC-CTLX-RV24-V3	A.21
7789155xxx	PAC-CTLX-RV24-V4	A.21
7789156xxx	PAC-CTLX-SD25-V4	A.21
7789157xxx	PAC-CTLX-SD25-V5	A.21
7789158xxx	PAC-CTLX-SD25-V6	A.21
7789159xxx	PAC-CTLX-SD25-V7	A.21
7789190xxx	PAC-S300-RV24-V0	A.30
7789191xxx	PAC-S300-RV12-V0	A.30
7789192xxx	PAC-S300-HE20-V0	A.30
7789193xxx	PAC-S300-SD15-V0	A.31
7789194xxx	PAC-S300-SD25-V0	A.31
7789195xxx	PAC-S300-SD15-V4	A.31
7789196xxx	PAC-S300-SD25-V4	A.31
7789210xxx	PAC-S300-RV24-V1	A.30
7789211xxx	PAC-S300-RV24-V2	A.30
7789212xxx	PAC-S300-RV24-V3	A.30
7789214xxx	PAC-S300-RV24-V4	A.30
7789215xxx	PAC-S300-RV36-V0	A.30
7789219xxx	PAC-S300-RV12-V1	A.30
7789222xxx	PAC-S300-HE20-V2	A.32
7789223xxx	PAC-S300-HESD-V0	A.32
7789224xxx	PAC-S300-SD15-V1	A.31
7789225xxx	PAC-S300-SD37-V0	A.31
7789226xxx	PAC-S300-SD37-V1	A.31
7789227xxx	PAC-S300-SD15-V2	A.31
7789228xxx	PAC-S300-SD15-V3	A.31
7789229xxx	PAC-S300-SD25-V1	A.31
7789230xxx	PAC-S300-SD25-V2	A.31
7789231xxx	PAC-S300-SD37-V2	A.31
7789233xxx	PAC-S300-SD25-V3	A.31
7789234xxx	PAC-S300-HE20-V3	G.13
7789236xxx	PAC-S300-HE20-V4	G.13
7789237xxx	PAC-S300-HE20-V5	A.30
7789239xxx	PAC-S300-HE20-V6	A.30
7789246xxx	PAC-S300-HE20-V7	A.30
7789261xxx	PAC-PREM-SD25-V0	A.26
7789270xxx	PAC-S400-RV36-V0	A.33
7789273xxx	PAC-S400-RV24-V0	A.33
7789278xxx	PAC-S400-RV36-V2	A.33
7789283xxx	PAC-S400-RV12-V0	A.33
7789284xxx	PAC-S400-SD37-V0	A.33
7789285xxx	PAC-S400-SD25-V0	A.33
7789288xxx	PAC-S400-SD25-V3	A.33
7789290xxx	PAC-S400-HE20-V0	A.33
7789291xxx	PAC-S400-HE20-V1	A.33

Order No.	Type	Page
7789292xxx	PAC-S400-HE20-V2	A.33
7789301xxx	PAC-UNIV-HE20-1:1	G.14
7789307xxx	PAC-MICR-RV12-V0	A.25
7789308xxx	PAC-MICR-RV24-V0	A.25
7789309xxx	PAC-MICR-SD15-V0	A.25
7789310xxx	PAC-MICR-SD15-V1	A.25
7789311xxx	PAC-MICR-SD25-V0	A.25
7789312xxx	PAC-MICR-HE20-V0	A.25
7789313xxx	PAC-MICR-HE20-V1	A.25
7789314xxx	PAC-MICR-HE20-V2	A.25
7789315xxx	PAC-PREM-RV24-V0	A.26
7789316xxx	PAC-PREM-RV24-V1	A.26
7789317xxx	PAC-PREM-RV12-V0	A.26
7789318xxx	PAC-PREM-RV24-V2	A.26
7789319xxx	PAC-PREM-SD25-V1	A.26
7789320xxx	PAC-PREM-SD15-V0	A.26
7789321xxx	PAC-PREM-SD15-V1	A.26
7789322xxx	PAC-PREM-HE20-V0	G.14
7789326xxx	PAC-TWDD-HE20-V0	A.28
7789327xxx	PAC-TWDD-HE20-V1	A.28
7789328xxx	PAC-TWDD-HE20-V2	A.28
7789329xxx	PAC-TWDD-HE20-V3	A.28
7789330xxx	PAC-MICR-RV36-V0	A.25
7789331xxx	PAC-MICR-RV24-V1	A.25
7789373xxx	PAC-CJ1W-HE20-V3	A.19
7789380xxx	PAC-M340-HE20-V1	A.24
7789382xxx	PAC-M340-RV24-V0	A.24
7789383xxx	PAC-M340-RV24-V1	A.24
7789384xxx	PAC-M340-RV24-V3	A.24
7789386xxx	PAC-M340-HE20-V2	A.24
7789387xxx	PAC-M340-HE20-V0	A.24
7789604xxx	PAC-S300-SD37-V3	A.31
7789606xxx	PAC-S300-UNIU-V0	F.9
7789607xxx	PAC-S300-UNIS-V0	F.9
7789608xxx	PAC-S300-UNIU-V1	F.9
7789609xxx	PAC-S300-UNIS-V1	F.9
7789617010	C300-32B-F-2S-M34-1M	B.15
7789618xxx	PAC-RX3i-HE20-V0	A.15
7789619xxx	PAC-RX3i-HE20-V1	A.15
7789620xxx	PAC-RX3i-SD15-V0	A.15
7789621xxx	PAC-RX3i-SD25-V2	A.15
7789622xxx	PAC-RX3i-SD37-V0	A.15
7789623xxx	PAC-RX3i-SD37-V1	A.15
7789624xxx	PAC-RX3i-SD15-V1	A.15
7789625xxx	PAC-RX3i-SD25-V0	A.15
7789626xxx	PAC-RX3i-SD37-V2	A.15
7789628xxx	PAC-M340-SD15-V3	A.24
7789629xxx	PAC-M340-SD15-V4	A.24
7789630xxx	PAC-M340-HE20-V3	A.24
7789631xxx	PAC-RX3i-RV36-V0	A.15
7789632xxx	PAC-RX3i-RV36-V1	A.15
7789633xxx	PAC-M340-RV24-V2	A.24
7789634xxx	PAC-RX3i-RV12-V0	A.15
7789635xxx	PAC-M340-HERV-V0	A.24
7789636xxx	PAC-RX3i-RV24-V2	A.15
7789637xxx	PAC-M340-SD15-V0	A.24
7789638xxx	PAC-M340-SD15-V1	A.24
7789639xxx	PAC-M340-SD37-V0	A.24
7789640xxx	PAC-M340-SD15-V2	A.24
7789641xxx	PAC-ABS8-HE20-V0	A.12
7789643xxx	PAC-ABS8-HE20-V1	A.12
7789645xxx	PAC-CJ1W-HE20-V4	A.19
7789648xxx	PAC-CJ1W-RV12-V0	A.19
7789649xxx	PAC-CJ1W-RV24-V0	A.19
7789650xxx	PAC-CJ1W-HE20-V5	A.19
7789657xxx	PAC-ABS8-SD25-V0	A.12
7789664xxx	PAC-CJ1W-RV24-V1	A.19
7789665xxx	PAC-RX3i-RV36-V2	A.15
7789666xxx	PAC-RX3i-RV24-V0	A.15
7789667xxx	PAC-RX3i-SD25-V1	A.15
7789668xxx	PAC-RX3i-SD15-V2	A.15
7789669xxx	PAC-RX3i-RV24-V1	A.15
7789670xxx	PAC-SLC5-HE20-V8	A.22
7789681xxx	PAC-MIMQ-HE20-V0	A.17
7789682xxx	PAC-MIMQ-SD37-V0	A.17
7789683xxx	PAC-MIMQ-HE20-V1	A.17
7789684xxx	PAC-MIMQ-SD25-V0	A.17
7789685xxx	PAC-MIMQ-SD25-V1	A.17
7789695xxx	PAC-CMLX-HE20-V3	A.20
7789696xxx	PAC-RX3i-RV36-V3	A.15
7789697xxx	PAC-CMLX-HE20-V4	A.20
7789700xxx	PAC-EMDV-HE20-V0	A.13
7789701xxx	PAC-EMDV-HE20-V1	A.13
7789702xxx	PAC-EMDV-HE20-V2	A.13
7789703xxx	PAC-EMDV-HE20-V3	A.13
7789704xxx	PAC-EMDV-SD25-V0	A.13
7789708xxx	PAC-MIMQ-HE20-V2	A.17
7789709xxx	PAC-MIMQ-SD37-V1	A.17
7789710xxx	PAC-MIMQ-SD25-V2	A.17
7789711xxx	PAC-MIMQ-SD25-V3	A.17
7789729xxx	PAC-S300-HE20-V10	A.30
7789730xxx	PAC-S300-HE20-V11	A.30
7789731xxx	PAC-CTLX-UNIU-V0	F.9
7789732xxx	PAC-CTLX-UNIS-V0	F.9
7789733xxx	PAC-CTLX-UNIU-V1	F.9
7789734xxx	PAC-CTLX-UNIS-V1	F.9
7789759xxx	PAC-S300-HE40-S-V0	A.31
7789760010	PAC-ELC020-F20-F20-1M	F.8
7789761010	PAC-ELC020-F20-F-1M	F.8

Order No.	Type	Page
7789762010	PAC-ELC038-F38-F38-1M	F.8
7789763010	PAC-ELC038-F38-F-1M	F.8
7789764010	PAC-ELC056-F56-F56-1M	F.8
7789765010	PAC-ELC0 56-F56-F-1M	F.8
7789767xxx	PAC-CJ1W-HE20-V7	A.19
7789768xxx	PAC-CJ1W-HE20-V8	A.30
7789769xxx	PAC-CMLX-HE20-V5	A.20
7789770xxx	PAC-CMLX-HE20-V6	A.20
7789771xxx	PAC-CJ1W-HE20-V9	A.30
7789772xxx	PAC-CJ1W-HE20-V10	A.19
7789773010	PAC-ELC056-F32-F32-1M	F.8
7789774010	PAC-ELC056-F32-F1M	F.8
7789775010	PAC-ELC056-F54-F54-1M	F.8
7789776010	PAC-ELC056-F54-F-1M	F.8
7789793xxx	PAC-CJ1W-HE20-V11	A.19
7789794xxx	PAC-CJ1W-HE20-V12	A.19
7789798xxx	PAC-RX3i-SD37-V3	A.15
7789800xxx	PAC-S300-SD25-V5	A.31
7789801xxx	PAC-S300-HE20-S-V0	A.31
7789827xxx	PAC-PREM-UNIU-V0	F.9
7789828010	C300-32B-320B-2S-M25-1M	B.13
7789829010	C300-36B-324B-2S-M25-1M	B.14
7789830xxx	PAC-S300-HE20-V16	A.30
7789831xxx	PAC-CMLX-HE20-V7	A.20
7789832xxx	PAC-CMLX-HE20-V8	A.20
7789833xxx	PAC-CJ1W-HE20-V13	A.19
7789834xxx	PAC-MICR-HE20-V3	A.25
7789837010	PAC-C300-3636-50-1M	B.14
7789838010	C300-32B-320B-2S-M50-1M	B.13
7789840xxx	PAC-M258-HE20-V0	A.23
7789841xxx	PAC-M258-SD15-V0	A.23
7789842xxx	PAC-RX3i-UNIU-V0	F.9
7789846xxx	PAC-M340-SD25-V0	A.24
7789847xxx	PAC-M340-SD25-V1	A.24
7789854xxx	PAC-M258-RV12-V0	A.23
7789855xxx	PAC-M258-RV12-V1	A.23
7789857xxx	PAC-M258-HE20-V1	A.23
7789858xxx	PAC-M258-RV12-V2	A.23
7789859xxx	PAC-M258-HE20-V2	A.23
7789862xxx	PAC-XIOC-HE20-V0	A.18
7789863xxx	PAC-XIOC-HE20-V1	A.18
7789864xxx	PAC-XIOC-RV24-V0	A.18
7789865xxx	PAC-XIOC-HE20-V2	A.18
7789866xxx	PAC-XIOC-HE20-V3	A.18
7789867xxx	PAC-XIOC-SD25-V0	A.18
7789868xxx	PAC-XIOC-SD15-V0	A.18
7789869xxx	PAC-XIOC-SD25-V1	A.18
7789870xxx	PAC-XIOC-SD15-V1	A.18
7789871xxx	PAC-XIOC-RV24-V1	A.18
7789872xxx	PAC-XIOC-HE20-V4	A.18
7789879010	PAC-C300-3232-14-1M	B.13
7789880010	PAC-C300-3232-25-1M	B.13
7789882010	PAC-C300-3232-50-1M	B.13
7789883010	PAC-C300-3636-14-1M	B.14
7789884010	PAC-C300-3636-25-1M	B.14
7789885010	PAC-C300-3636-34-1M	B.14
7789886010	C300-32B-216B-2S-M34-1M	B.19
7789887010	C300-32B-320B-2S-M14-1M	B.13
7789888010	C300-32B-320B-2S-M34-1M	B.13
7789890010	C300-36B-324B-2S-M14-1M	B.14
7789891010	C300-36B-324B-2S-M34-1M	B.14
7789892010	C300-36B-324B-2S-M50-1M	B.14
7789893010	PAC-C300-32-1616-34-1M	B.19
7789895010	C300-32B-F-2S-M50-1M	B.15

8000000000

8003881001	RS SD37S UNC 4.40 LP2N	D.8
8003891001	RS SD37B UNC 4.40 LP2N	D.8
8003901001	RS SD9S UNC 4.40 LP2N	D.8
8003911001	RS SD9B UNC 4.40 LP2N	D.8
8005161001	RS SD05S UNC 4.40 LP2N	D.8
8005171001	RS SD05B UNC 4.40 LP2N	D.8
8005181001	RS SD25S UNC 4.40 LP2N	D.8
8005191001	RS SD25B UNC 4.40 LP2N	D.8
8005201001	RS SD15S UNC 4.40 LP2N	D.8
8005211001	RS SD15B UNC 4.40 LP2N	D.8

8010000000

8012850000	RS F10 LP3R 3/12	D.7
8012860000	RS F14 LP3R 3/14	D.7
8012870000	RS F16 LP3R 3/18	D.7
8012910000	RS F20 LP3R 3/21	D.7
8012920000	RS F26 LP3R 3/27	D.7
8012930000	RS F34 LP3R 3/36	D.7
8012940000	RS F40 LP3R 3/42	D.7
8012950000	RS F50 LP3R 3/51	D.7
8012960000	RS F60 LP3R 3/63	D.7
8012970000	RS F64 LP3R 3/66	D.7
8013120000	SKH CB4*2 (A&C) RH2	H.11
8019880000	RS SD9B LP3R	D.9
8019890000	RS SD15B LP3R	D.9
8019900000	RS SD25B LP3R	D.9
8019910000	RS SD37B LP3R	D.9
8019920000	RS SD05B LP3R	D.9
8019930000	RS SD9S LP3R	D.9
8019940000	RS SD15S LP3R	D.9
8019950000	RS SD25S LP3R	D.9

Order No.	Type	Page
8019960000	RS SD37S LP3R	D.9
8019970000	RS SD05S LP3R	D.9

8020000000

8022901001	RS0 10 LP/LP	D.21
8022911001	RS0 20 LP/LP	D.21
8022921001	RS0 40 LP/LP	D.21

8050000000

8050981001	SKH D32*2 LP5.08/16 RH2	H.11
8051300000	SKH H15S	H.10

8150000000

8155550000	RS F64 LPK 2H/66	D.7
8155570000	RS F50 LPK 2H/52	D.7
8155580000	RS F40 LPK 2H/42	D.7
8155590000	RS F34 LPK 2H/36	D.7
8155600000	RS F20 LPK 2H/22	D.7
8155610000	RS F10 LPK 2H/12	D.7
8155620000	RS SD25B UNC LPK2	D.9
8155630000	RS SD37B UNC LPK2	D.9
8155640000	RS SD50B UNC LPK2	D.9
8155650000	RS SD25S UNC LPK2	D.9
8155660000	RS SD37S UNC LPK2	D.9
8155670000	RS SD50S UNC LPK2	D.9

8170000000

8174800000	SKH2 31 LP	H.4
8174830000	SKH2 D32 LP	H.4
8174850000	SKH2 F32 (Z+B) LPP	H.5
8174860000	SKH2 F32 (Z+D) LP	H.5

8190000000

8199510000	RS LPK3/144 VERT	D.19
------------	------------------	------

8200000000

8209730000	RS SD15B UNC LPK2	D.9
------------	-------------------	-----

8210000000

8213470000	RS F26 LPK 2H/28	D.7
8216480000	RS SD9B UNC LPK2	D.9

8230000000

8233350000	RS SD15S UNC LPK2	D.9
8234620000	RS VERT16 LPK2	D.18

8250000000

8252010000	RS VERT8 LPK2	D.18
8258980000	RS F14 LPK 2H/16	D.7
8259000000	RS F60 LPK 2H/62	D.7
8259010000	RS SD9S UNC LPK2	D.9

8260000000

8265540000	RS F16 LPK 2H/18	D.7
------------	------------------	-----

8530000000

8537110000	RS F20 Z	D.6
8537130000	RS F34 Z	D.6
8537140000	RS F40 Z	D.6
8537150000	RS F50 Z	D.6
8537180000	RS F26 Z	D.6
8537190000	RS F10 Z	D.6
8537200000	RS F14 Z	D.6
8537240000	RS SD37 SZ	D.8
8537250000	RS SD37 BZ	D.8
8537260000	RS SD9 SZ	D.8
8537320000	RS SD9 BZ	D.8
8537350000	RS SD50 SZ	D.8
8537360000	RS SD50 BZ	D.8
8537370000	RS SD25 SZ	D.8
8537380000	RS SD25 BZ	D.8
8537390000	RS SD15 SZ	D.8
8537400000	RS SD15 BZ	D.8

8550000000

8555440000	RS RJ45 2WAY	D.11
------------	--------------	------

8610000000

8611320000	RS RJ45	D.11
------------	---------	------

9440000000

9441500000	RS 160 1W R S	A.48
9441510000	RS 320 1W R S	A.51
9441540000	RS 800 2W R S	A.39
9441560000	RS 1600 2W F R S	A.49

Order No.	Type	Page
9441570000	RS 32IO 2W F R S	A.52
9441600000	RS 16IO 3W I R S	A.50
9441610000	RS 32IO 3W I R S	A.53
9441700000	RS 16IO 2W R S	A.49
9441710000	RS 32IO 2W R S	A.52
9441860000	RS 16IO 1W I R S	A.48
9441870000	RS 32IO 1W I R S	A.51
9445000000	RSM-8 C 1CO S	A.68
9445060000	RSM-12 C 1CO S	A.74
9445100000	RSM-16 C 1CO S	A.79
9445120000	RSM-16 FJS 1CO S	A.81
9445140000	RSM-16 FOR 1CO S	A.82
9445530000	RS 8IO 2W L H S	A.38
9445630000	RS 12IO 2W L H S	A.40
9445700000	RS 16IO 1W H S	A.41
9445710000	RS 16IO 1W L H S	A.41
9445720000	RS 16IO 2W H S	A.43
9445730000	RS 16IO 2W L H S	A.43
9445750000	RS 16IO 2W HL H S	A.44
9445760000	RS 16IO 3W H S	A.47
9445770000	RS 16IO 3W L H S	A.47
9445810000	RS 16IO 1W HL H S	A.42
9445820000	RS 16IO 2W F H S	A.46
9447000000	RSM-8 C 1CO Z	A.68
9447100000	RSM-16 C 1CO Z	A.79
9447120000	RSM-16 FJS 1CO Z	A.81
9448000000	RS 4AIO DP SD S	A.56
9448010000	RS 8AIO DP SD S	A.58
9448020000	RS 16AIO DP SD S	A.60
9448030000	RS 8AI PREM/APR SD S	A.59
9448040000	RS 8AI1AO MICRO SD S	A.59
9448100000	RS 4AIO I-M-DP SD S	A.56
9448110000	RS 8AIO I-M-DP SD S	A.58
9448120000	RS 16AIO I-M-DP SD S	A.60
9449110000	RS 8AIO I-M-DP SD Z	A.58

We cannot guarantee that there are no mistakes in the publications or software provided by us to the customer for the purpose of making orders. We try our best to quickly correct errors in our printed media.

X

All orders are based on our general terms of delivery, which can be reviewed on the websites of our group companies where you place your order. On demand we can also send the general terms of delivery to you.

Weidmüller – Your partner in Industrial Connectivity

As experienced experts we support our customers and partners around the world with products, solutions and services in the industrial environment of power, signal and data. We are at home in their industries and markets and know the technological challenges of tomorrow. We are therefore continuously developing innovative, sustainable and useful solutions for their individual needs. Together we set standards in Industrial Connectivity.

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 16
32758 Detmold, Germany
T +49 5231 14-0
F +49 5231 14-292083
info@weidmueller.com
www.weidmueller.com

Your local Weidmüller partner can
be found on our website:
www.weidmueller.com/countries

Made in Germany



Order number: 2021570000/01/2016/SMDM